

Italgroup[®]

HYDRAULIC MOTORS

ITALY



HC

Single displacement hydraulic motors – High Cavitation

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense.
Italgrouo S.r.l. reserves the right to implement modifications without notice.

All partial or total reproduction and copy without written authorization of Italgrouo S.r.l. is strictly forbidden.

©2016 ITALGROUO S.R.L. - ALL RIGHTS RESERVED -

**COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =**

ITALGROUP MOTORS

HC SERIES

TECHNICAL CATALOGUE

GENERAL INDEX

INTRODUCTION - GENERAL INFORMATION	Pag.	3 - 4
HC - ORDERING CODE	"	5
TECHNICAL DATA - STANDARD & HSM VERSION	"	6 - 7
HYDRAULIC FLUID RECOMMENDATIONS	"	8 - 9
DRAIN RECOMMENDATIONS	"	10
FLUSHING	"	11
STANDARD SHAFT SEAL FEATURES	"	12 - 13
FORMULAS	"	14
CONVERSIONS	"	15
MOTOR INSTALLATION AND START-UP	"	16 - 18
MOTOR HANDLING AND STORAGE	"	19 - 20
MAINTENANCE OPERATION	"	21
INSTRUCTION AND ADVICES	"	22
SPECIAL FEATURES	"	23
CAVITATION AND FREEWHEELING	"	24
TROUBLESHOOTING	"	25 - 26
HC05	"	27 - 36
HC1	"	37 - 47
HC2	"	49 - 61
HC3	"	63 - 75

ITALGROUP MOTORS

HC SERIES

TECHNICAL CATALOGUE

GENERAL INDEX


HC5	Pag.	77- 87
MOTOR DISTRIBUTORS	"	88 - 89
TACHOMETERS	"	90 - 93
SPLINED BILLETS	"	94
ADAPTOR FLANGES - SPLINED BARS	"	95
VALVES	"	97 - 109
CONTACT US - REACH US	"	110

INTRODUCTION - GENERAL INFORMATION

Carefully read the use and maintenance manual before start-up the motor. The use and maintenance manual must be placed near to motor installation location in order to guarantee operators easy access to the instruction manual. For further information please contact Italgroup.

Motor description

HC series motors are radial piston hydraulic motors (generally indicated as LSHT motors, low speed high torque motors) with a rotating shaft (1) and a stationary housing (2). The pistons (3) are located radially and the working fluid provide the mechanical force that push the pistons against the eccentric shaft, providing the shaft output torque. The inlet and outlet flow to and from the pistons is regulated by a distributor (4), that provides the oil distribution correct timing. The HC motor design is very compact because the piston and the connecting rod are realized in the same piece, to make this realizable an oscillating cylinder is present (5). Acting in the adequate way (increasing or reducing the oil flow coming from the pump) the motor rotational speed can be increased or reduced. The motor design guarantee extremely high starting torque and high mechanical working efficiency. Respecting the limitation of working parameters (indicated into the technical datasheets) and all recommendations (including fluid recommendations), high motor lifetimes are obtained and very low maintenance requirements are needed.

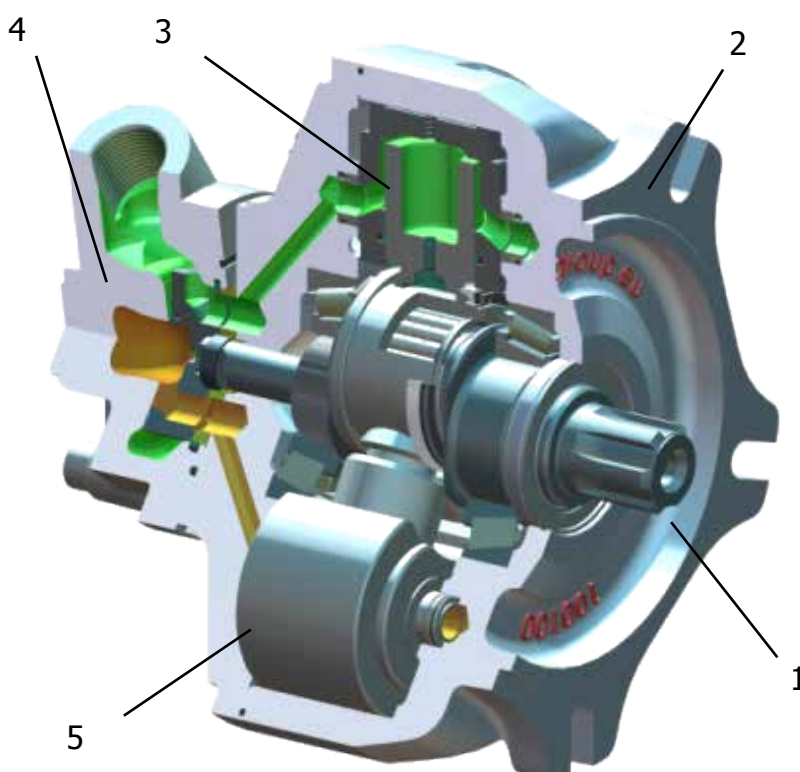



HC SERIES

Hydraulic motors of the HC series are single displacement crankshaft radial piston motors. Thanks to great variety of accessories HC series can be used in a wide range of applications such as:


- Marine equipments
- Winches
- Offshore equipments
- Conveyors
- Injection moulding machines
- Steel bending machines
- Fork lifts trucks
- Skid steer loaders
- Dumpers
- Agricultural and forestry machines
- Municipal vehicles
- Airport machinery

Product Features:

- ✓ High volumetric and mechanical efficiencies
- ✓ Very smooth running at low speeds
- ✓ High starting torque / constant torque
- ✓ High freewheeling / cavitation resistance
- ✓ Wide speed range
- ✓ Compact Design
- ✓ Low maintenance and high reliability
- ✓ Bi-directional
- ✓ High radial and axial force allowed
- ✓ Speed sensor available
- ✓ Built-in valves available

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.

HC - ORDERING CODE

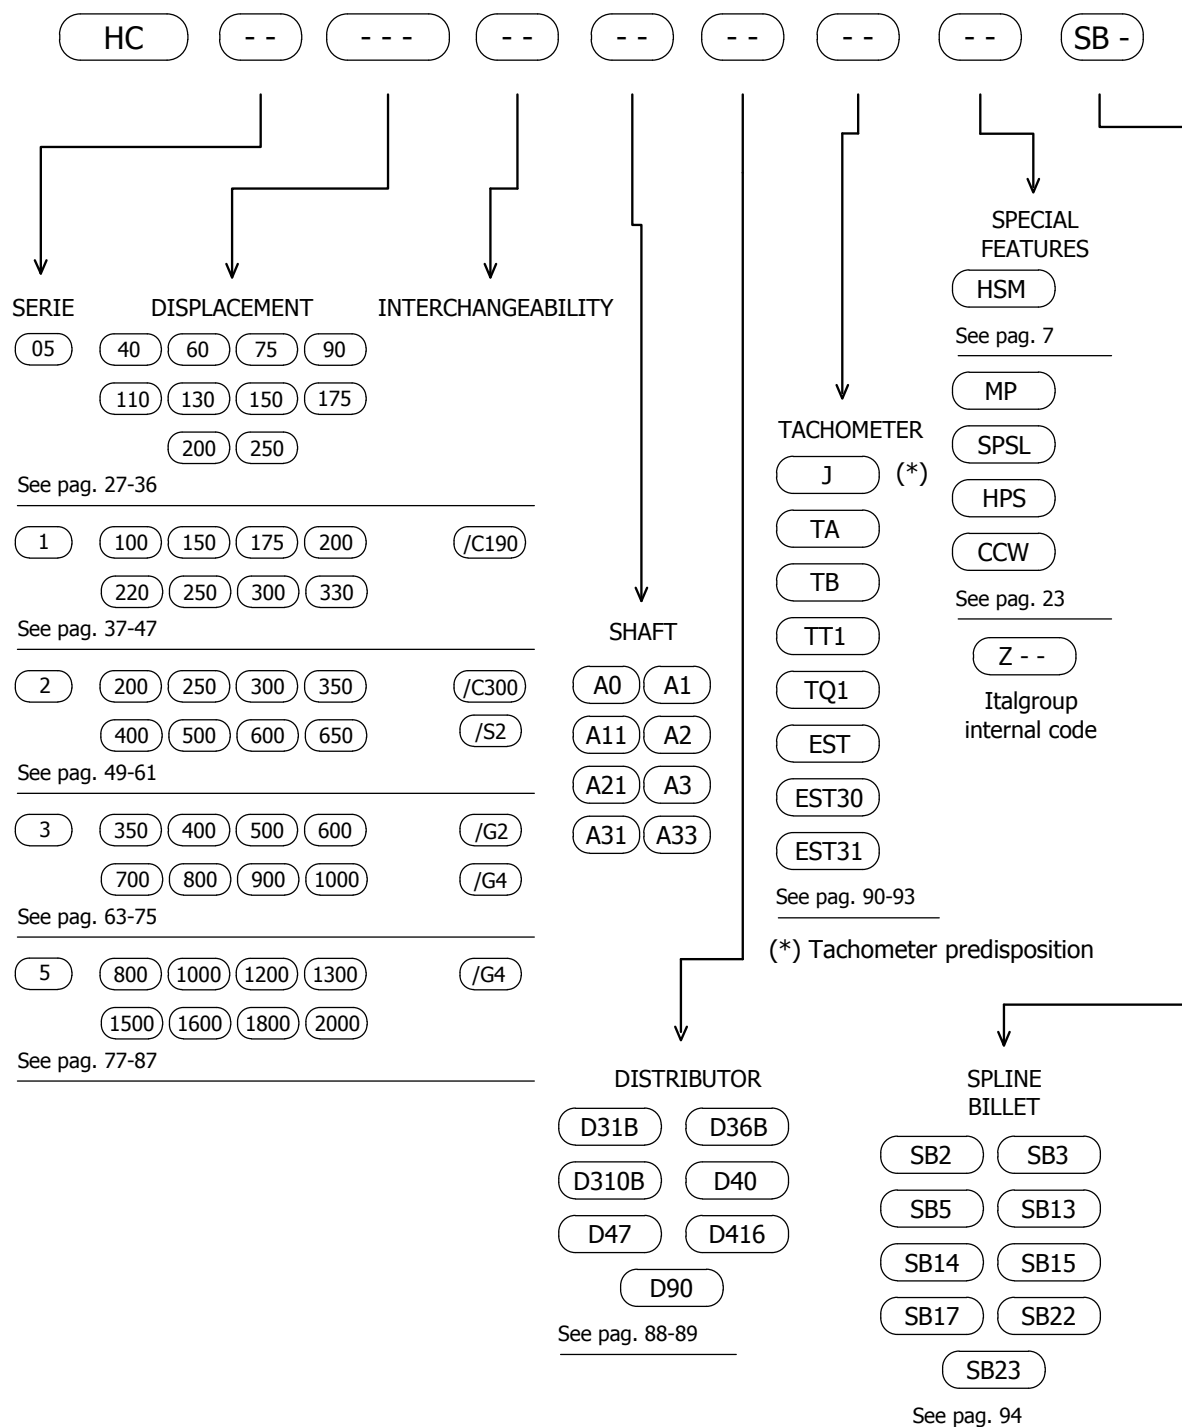

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

HC - MOTOR TECHNICAL DATA

Motor	Size	Displacement	Theoretical torque	Max cont. pressure	Max cont. speed	Peak speed (**)	Max. cont. power (*)	Peak power	Dry weight
		[cc]	[Nm/bar]	[bar]	[rpm]	[rpm]	[kW]	[kW]	[kg]
HC05 40	05	40	0.62	250	1200	1400	16	25	30
HC05 60	05	60	0.97	250	1200	1400	25	35	30
HC05 75	05	74	1.20	250	1200	1400	32	50	30
HC05 90	05	91	1.40	250	1100	1300	32	50	30
HC05 110	05	115	1.84	250	850	1100	35	55	30
HC05 130	05	129	2.05	250	850	1100	35	55	30
HC05 150	05	151	2.40	250	850	1100	35	55	30
HC05 175	05	166	2.65	250	750	1000	35	55	30
HC05 200	05	191	3.04	250	750	1000	35	55	30
HC05 250	05	226	3.60	250	600	800	35	55	30
HC1 100	1	98	1.57	250	1100	1250	40	60	35
HC1 150	1	154	2.45	250	700	1000	40	60	35
HC1 175	1	173	2.74	250	700	1000	45	75	35
HC1 200	1	200	3.20	250	600	900	45	75	35
HC1 220	1	221	3.52	250	600	800	48	75	35
HC1 250	1	243	3.88	250	600	800	50	75	35
HC1 300	1	289	4.61	250	550	700	50	75	35
HC1 330	1	315	5.01	250	450	650	50	75	35
HC2 200	2	193	3.06	250	1200	1500	75	105	53
HC2 250	2	251	4.00	250	950	1150	75	105	53
HC2 300	2	305	4.84	250	800	950	75	105	53
HC2 350	2	348	5.52	250	650	800	75	105	53
HC2 400	2	424	6.76	250	600	800	75	105	53
HC2 500	2	493	7.84	250	520	700	75	105	53
HC2 600	2	566	9.00	250	480	650	75	105	53
HC2 650	2	624	9.92	250	440	620	75	105	53

For all motors:

- Hydrostatic test pressure: see motor datasheets;
- Refer to motor performance diagrams for more information

- (*) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required. For more information please contact our technical department.

- (**) Do not exceed peak power.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroupp S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroupp S.r.l. is strictly forbidden.

HC - MOTOR TECHNICAL DATA

Motor	Size	Displacement	Theoretical torque	Max cont. pressure	Max cont. speed	Peak speed (**)	Max. cont. power (*)	Peak power	Dry weight
		[cc]	[Nm/bar]	[bar]	[rpm]	[rpm]	[kW]	[kW]	[kg]
HC3 350	3	352	5.60	250	640	800	82	130	92
HC3 400	3	426	6.78	250	600	800	85	130	92
HC3 500	3	486	7.73	250	500	700	85	130	92
HC3 600	3	595	9.47	250	450	600	85	130	92
HC3 700	3	689	11	250	420	600	85	130	92
HC3 800	3	792	12.6	250	400	550	85	130	92
HC3 900	3	872	13.9	250	360	525	85	130	92
HC3 1000	3	988	15.7	250	310	500	85	130	92
HC5 800	5	808	12.6	250	350	470	100	150	190
HC5 1000	5	1040	16.2	250	320	470	100	150	190
HC5 1200	5	1190	18.5	250	320	430	100	150	190
HC5 1300	5	1340	20.9	250	320	430	100	150	190
HC5 1500	5	1464	22.8	250	300	380	100	150	190
HC5 1600	5	1635	25.4	250	280	350	100	150	190
HC5 1800	5	1816	28.3	250	280	350	100	150	190
HC5 2000	5	2010	31.3	250	220	180	100	150	190

For superior performances please refer to HCD series catalogue.

For all motors:

- Hydrostatic test pressure: see motor datasheets;
- Refer to motor performance diagrams for more information

- (*) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required. For more information please contact our technical department.
- (**) Do not exceed peak power.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. ItalgrouP S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of ItalgrouP S.r.l. is strictly forbidden.

Fluid selection

In general, we recommend the use of hydraulic oils with minimum viscosity index of 95, with anti-wear additives (ISO HM and HV). Once normal working temperature is reached, the drain oil viscosity must be at least 20 cSt, preferably in the range from 30 to 50 cSt.

HE oils (ecological fluids) are allowed, but must be used with particular attention, because they can influence the motor seals compatibility, and can reduce motor performances and life. Please contact us in case of HE oils usage.

Optimal viscosity selection

Referring the first approximated selection to the room temperature, we advice the following:

Room temperature	Oil
-20°C/0°C	BP ENERGOL HLP – HM 22
-15°C/+5°C	BP ENERGOL HLP – HM 32
-8°C/+15°C	BP ENERGOL HLP – HM 46
0°C/+22°C	BP ENERGOL HLP – HM 68
+8°C/+30°C	BP ENERGOL HLP – HM 100
-20°C/+5°C	BP BARTRAN HV 32
-15°C/+22°C	BP BARTRAN HV 46
0°C/+30°C	BP BARTRAN HV 68

ATF (automatic transmission fluid) oils, SAE 10-20-30 W oils, multigrade motor oils (SAE 15 W 40, 10 W 40), universal oils, can also be used. Always fill the motor (please refer to the "DRAIN RECOMMENDATIONS" section) with the selected hydraulic fluid before motor start-up. During cold start-up avoid high-speed operation until the system reach the working temperature, in order to provide an adequate lubrication. Every 5-8 °C of increase respect to the optimal working temperature for the selected oil, the hydraulic fluid life decrease of about 40-50% (refer to "OXIDATION" section). Consequently, the motor lifetime will be affected by the working temperature increase respect to the optimal working temperature of the selected oil. The maximum continuous working temperature is 70 °C, the temperature must be measured from motor drain line. If the motor doesn't have a drain line, the temperature must be evaluated at the return line port.

Fire resistant oil limitations

	Max cont. Pressure [bar]	Max int. Pressure [bar]	Max Speed [rpm]
HFA, 5-95% oil-water	103	138	50%
HFB, 60-40% oil-water	138	172	100%
HFC, water-glycol	103	138	50%
HFD, ester phosphate	250	293	100%

Filtration

Hydraulic systems oil must always be filtered.

The choice of filtration grade derives from needs of service life and money spent. In order to obtain stated service life it is important to follow our recommendations concerning filtration grade.

When choosing the filter it is important to consider the amount of dirt particles that filter can absorb and still operate satisfactorily. For that reason we recommend filters showing when you need to substitute filtering cartridge.

- 25 µm filtration required in most applications
- 10 µm filtration in closed circuit applications

Oxidation

Hydraulic oil oxidizes with time of use and temperature. Oxidation causes changes in colour and smell, acidity increase or sludge formation in the tank. Oxidation rate increases rapidly at surface temperatures above 60°C, in these situations oil should be checked more often.

The oxidation process increases the acidity of the fluid; the acidity is stated in terms of the "neutralization number". Oxidation is usually slow at the beginning and then it increases rapidly.

A sharp increase (by a factor of 2 to 3) in neutralization number between inspections shows that oil has oxidized too much and should be replaced immediately.

Water content

Oil contamination by water can be detected by sampling from the bottom of the tank. Most hydraulic oils repel the water, which then collects at the bottom of the tank. This water must be drained off at regular intervals. Certain types of transmission oils and engine oils emulsify the water; this can be detected by coatings on filter cartridges or a change in the colour of the oil. In such cases, obtain your oil supplier advice.

Degree of contamination


Heavy contamination of the oil causes wear rising in hydraulic system components. Contamination causes must be immediately investigated and remedied.

Analysis


It is recommended oil being analyzed every 6 months. The analysis should cover viscosity, oxidation, water content, additives and contamination. Most oil suppliers are equipped to analyze oil state and to recommend appropriate action. Oil must be immediately replaced if the analysis shows that it is exhausted.

DRAIN RECOMMENDATIONS


Motor axis horizontal

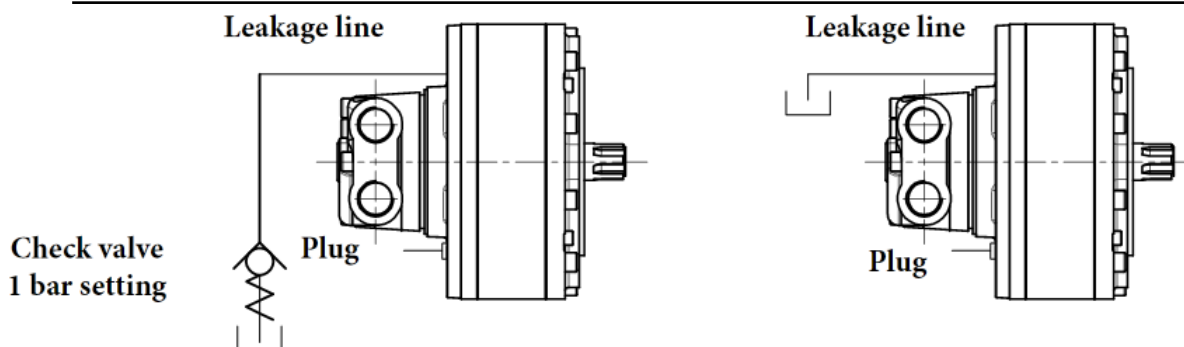

Motor axis vertical, shaft down

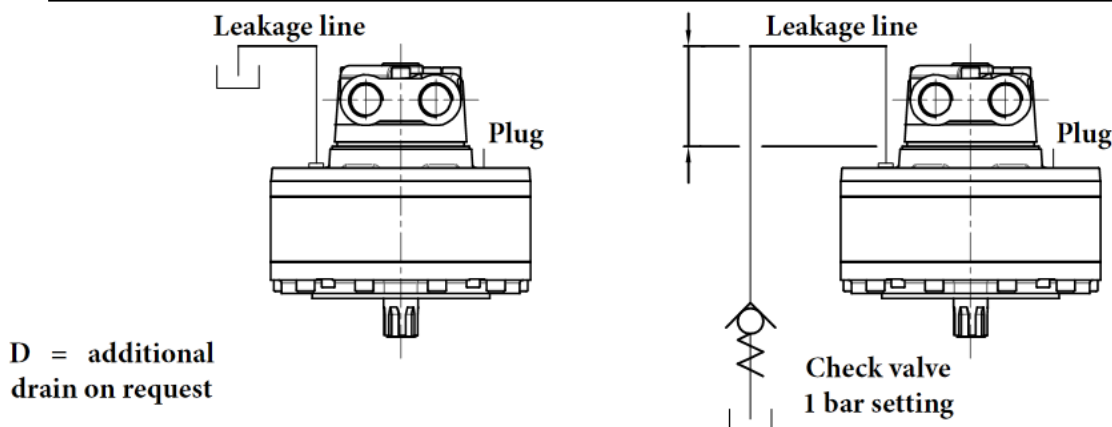

Motor axis vertical, shaft up

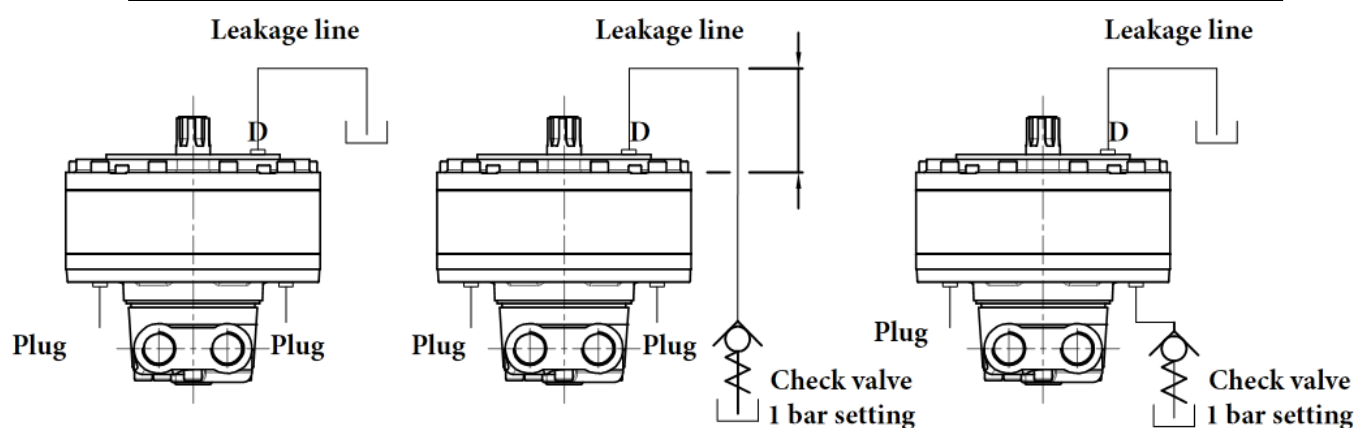

Leakage line connection

Always fill the motor with hydraulic fluid before start-up. Arrange piping in a way that the motor cannot drain off and cannot generate air bubbles into the motor case. Under certain conditions it may be necessary to arrange a check valve in order to help avoid the motor draining off. Always check carefully that the leakage line pressure doesn't overcome 10 bar pressure: therefore leakage lines must be shorter as possible and with a minimum flow resistance.

FLUSHING

Motor	Flushing flow [l/min]
HC05 40-60-75-90-110-130 HC1 100	5
HC05 150-175-200-250 HC1 150-175-200-220-250-300-330 HC2 200-250-300	6
HC2 350-400-500-600-630 HC3 350-400-500-600	8
HC3 700-800-900-1000 HC5 800-1000-1200-1300-1500	10
HC5 1600-1800-2000	15

Important note: the above value are approximated. The correct way to operate is the following: the flushing flow is adequate if during the motor operation the drain oil viscosity be at least 20 cSt, preferably in the range from 30 to 50 cSt.

Maximum continuous case pressure 10 bar (15 bar peak pressure). Special seals for 20 bar continuous case pressure (25 bar peak pressure) are available upon request (refer to page 23, ordering code: HPS).


Flushing outlet port

Please note: the flushing outlet port must always be located in the highest possible position.

Maximum case pressure

10 bar continuous
15 bar peak

For standard HC motors

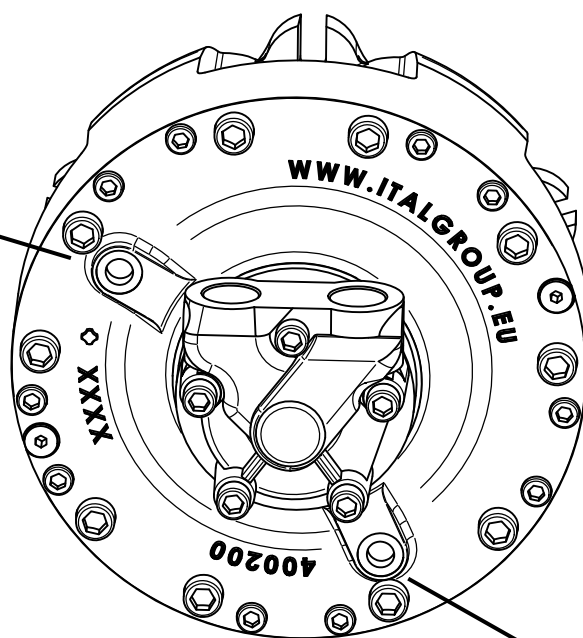

Flushing inlet port

STANDARD SHAFT SEAL FEATURES

Features

Type: BABSL
Form: AS DIN 3760
Material: SIMRIT[®] 72 NBR 902
SIMRIT[®] 75 FKM 595

Material

SIMMERRING[®] radial shaft seal with rubber covered O.D., short, flexibility suspended, spring loaded sealing lip and additional dust lip: see Part B/SIMMERRING[®], sections 1.1 and 2.

Application

Sealing lip and O.D.:

- Acrylonitrile-butadiene rubber with 72 Shore A hardness (designation: SIMRIT[®] 72 NBR 902)
- Fluoro rubber with 75 Shore A hardness (designation: SIMRIT[®] 75 FKM 595)

Metal insert:

- Plain steel DIN 1624

Spring:

- Spring steel DIN 17223
-

Operating conditions

See Part B/ SIMMERRING[®], sections 2. 4.

Media: mineral oils, synthetic oils

Temperature:

- 40°C to +100°C (SIMRIT[®] 72 NBR 902)
- 40°C to +160°C (SIMRIT[®] 75 FKM 595)

Surface speed: up to 5 m/s

Working pressure: see diagram on next page, pressure is function of surface speed (i.e. of rotating speed and shaft diameter)

STANDARD SHAFT SEAL FEATURES

Housing and machining criteria See Part B/ SIMMERRING®, sections 2.

Shaft:
Tolerance: ISO h11
Concentricity: IT 8
Roughness: $R_a=0.2-0.8 \mu\text{m}$
 $R_z=1-4 \mu\text{m}$
 $R_{\text{max}}=6 \mu\text{m}$
Hardness: 45-60 HRC
Roughness: non oriented;
preferably by plunge grinding

Housing:
Tolerance: ISO H8
Roughness: $R_{\text{max}} < 25 \mu\text{m}$

Pressure diagram

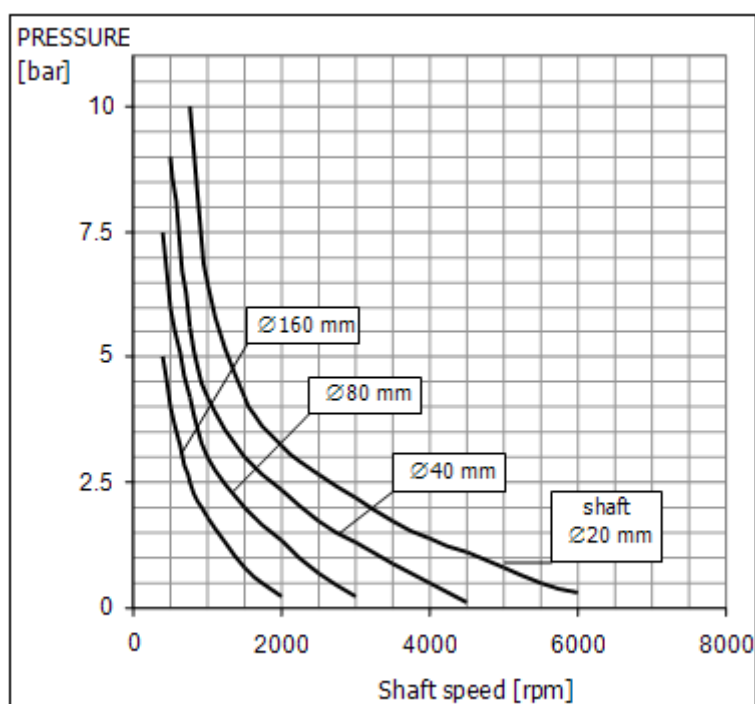


Diagram 1: Pressure Loading Limits

Special seals for 20 bar continuous case pressure are available upon request (ordering code: HPS). Refer to page 23 for more information.

FORMULAS

LEGEND

T	Torque [Nm]
T_s	Specific torque [Nm/bar]
P₁	Power [kW]
P₂	Power [CV]
S	Speed [rpm]
V	Displacement [cc/Rev]
F	Flow [l/min]
P_r	Pressure [bar]

FORMULA

$$T = T_s * P_r = (V * P_r) / 62.8$$

$$P_1 = (T * S) / 9549$$

$$P_2 = (T * S) / 7023$$

$$S = (F * 1000) / V$$

$$V = (T * 62.8) / P_r$$

$$F = (V * S) / 1000$$

LENGHT 1 m = 39,3701 in

= 3,2808 ft

= 1,0936 yd

= 1000 mm

1 in = 0,0833 ft

= 25,4 mm

1 ft = 0,3048 m

= 0,3333 yd

= 12 in

1 yd = 0,9144 m

= 3 ft

= 36 in

1 km = 1000 m

= 1093,6 yd

= 0,6214 mile

1 mile = 1,609 km

= 1760 yd

SPEED 1 m/s = 3,6 km/h

= 2,237 mph

= 3,2808 ft/s

1 km/h = 0,2778 m/s

= 0,6214 mph

= 0,9113 ft/s

1 mph = 1,609 km/h

= 0,447 m/s

= 1,467 ft/s

1 ft/s = 0,3048 m/s

= 1,0973 km/h

= 0,6818 mph

MASS 1 kg = 2,2046 lb

FORCE 1 N = 0,102 kgf

= 0,2248 lbf

1 kgf = 2,205 lbf

= 9,806 N

1 lbf = 0,4536 kgf

= 4,448 N

PRESSURE 1 bar = 14,223 psi

= 0,99 atm

= 1,02 ata

= 100000 Pa

= 100 kPa

= 0,1 MPa

1 psi = 0,0703 bar

FLOW 1 l/min = 0,264 gpm

= 1000 cc/Rev

1 gpm = 3,785 l/min

= 3785 cc/min

1 m³/s = 60000 l/min

= 15852 gpm

POWER 1 kW = 1,341 HP

= 1,3596 CV

1 HP = 0,7457 kW

= 1,0139 CV

VOLUME 1 m³ = 1000 l

1 l = 61,023 in³

= 0,264 galUS

1 in³ = 0,01639 l

= 16,39 cm³

= 0,004326 galUS

1 galUS = 3,7879 l

= 231,15 in³

TORQUE 1 Nm = 0,102 kgm

= 0,7376 lbf ft

1 kgm = 9,806 Nm

= 7,2325 lbf ft

1 lbf ft = 0,1383 kgm

= 1,3558 Nm

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroupp S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroupp S.r.l. is strictly forbidden.


Motor installation and start-up

The motor, after testing, it's packed in different ways that depends by customer and/or logistic requirements. The motor must be carefully moved from his box or pallet, with the assistance of correctly sized movimentation tools, like eyebolts (all the motors has a thread hole in the shaft end, please refer to the HC general catalogue, shafts section) or lifting slings.

When the motor is moved from one place to another always be very careful and act in a way that the motor is stable and under control during movimentation (refer to handling and storage section for more details).

Before mount the motor, check carefully the absence of damage happened for example during transportation and/or storing.

For mounting dimensions please refer to the HC installation drawings. The motor must be installed using the correct screws size (we recommends the use of 10.9 and 12.9 class resistance fixing screws) and must be placed on a structure that is capable to correctly support the motor during functioning: for this reason the structure must not only be able to support the motor weight but must also assure the absence of vibration during operation and must win the reaction forces that are generated by the working torque. Regarding the motor fitting design, the concentricity between the centering diameter (spigot) and shaft (both splined or parallel) must be assured with a strict tolerance (please refer to the following general indication). If the concentricity between the shaft and the centering diameter and/or fixing holes is not respected, in the worst case the motor can have an unusual failure or can work only with low performances. Splined adaptors (splined billets) are available upon request.

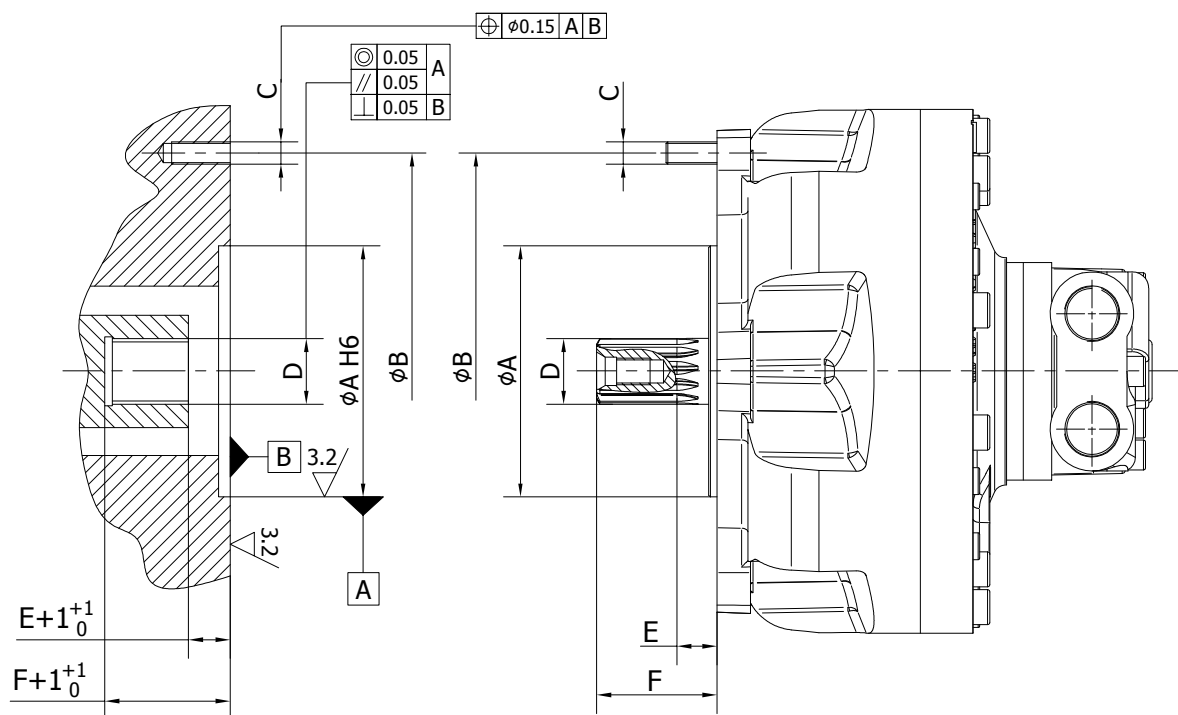

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.

Hoses and piping must be clean and free from contamination. Use proper hoses for oil connection, both for inlet and outlet main ports, and for drain line. Refer to hoses and fitting constructors in order to correctly size and select hoses and fittings. In order to keep control on the oil compressibility keep hoses to the minimum recommended size and select pipelines most rigid as possible.

The motor can be mounted in any position (refer also to drain recommendations section). In run-away conditions you must use counterbalance valves. When the motor is installed vertically with shaft pointing upwards, consult our technical department. If the motor is connected to high inertial loads, the hydraulic system must be designed to prevent peaks of pressure and cavitation.

Consider the use of relief valves, possibly directly mounted on motor distributor in case the application can generate pressure peaks at the motor ports: the relief valve should be able to discharge all the flow (or at least a good part of it) with a limited pressure increase. Italgroup can provide different valve types that can be placed directly on the motor distributor (please refer to Italgroup valves technical catalogue section).

Motor case and pistons must be completely filled with oil before starting. Do not load motor to maximum working pressure instantly. During cold start-up avoid high-speed operation until the system reaches the working temperature. Connect the case drain directly to tank, and avoid excessive drain line pressure losses (the case drain pressure must not exceed 10 bar continuous pressure for HC serie standard motors). The case drain port on the motor must be located on the highest point of the installation to ensure that the motor will always be full of oil. (See drain recommendations page for more details)

Maximum oil temperature must not exceed 70°C. Heat exchangers must be used with higher temperatures. The operating fluid viscosity must always be higher than a certain minimum value (see "fluid recommendation" section) in order to guarantee an optimal motor internal lubrication. When the working conditions cause the motor case overheating above a critical value, the motor flushing is required. Flushing consists in the introduction of fresh oil (taken from the hydraulic circuit) into the motor case. Oil must be taken from the return line to avoid internal motor damage (the continuous motor case pressure must be maximum 6 bar). Flushing is an important operation that can be very effective to improve motor lifetime with heavy duty working conditions and improve the motor mechanical efficiency.

The motor flushing, if the motor works in one direction only, can be easily performed connecting the motor return line to the lowest motor drain port. The highest motor drain port must be connected to the tank. For D90 flow distributors, the side 1/4" metallic plugs can be used for flushing circuit installation: in fact the plug (corresponding to the return line port) be removed and the connection between motor low pressure port and motor case can be correctly realized.

MOTOR INSTALLATION AND START-UP

If the motor axis is not horizontal and/or the motor works in bidirectional operation, please contact Italgroupp technical department, that can assist you to advice how to perform the desired operation in the best way. Just for your reference, Italgroupp can provide you flushing valves in order to perform an effective flushing circuit.

Minimum speed is very low and can reach values near to 0.5-1 rpm (depending on motor displacement). In case of low speed vibration a reasonable back pressure can eliminate or minimize the vibration and noise level (a general guideline value can be defined by 5-8 bar back pressure). For more information please contact our technical department.

HC series motors can works in an efficient way with high back pressures (back pressure occurs for example when hydraulic motors are installed in series circuit). A general guideline for back pressure can be set limiting the inlet and outlet pressure sum to 400 bar. High back pressure values are often responsible of motor overheating, so if drain temperature reach values that bring the oil viscosity under the recommended limit (refer to fluid recommendations section), perform appropriate motor flushing and/or reduce the back pressure.

During start-up and in the period immediately after it, any hydraulic installation must be regularly and carefully checked at frequent intervals. The working pressure must be checked in order to understand that it agrees with the design values. The drain line pressure for standard motors must not overcome 6 bar continuous. If leakage occurs, check the reason, correct it and carry out new measurements. Check all lines, connections, screws, etc, and tighten if necessary. Replace contaminated fluid immediately.

The motor installation and start-up must be performed by instructed and experienced personnel only.

Please contact us freely to obtain further information.

Motor handling


The motor must be correctly packed during transport and correctly stored into the warehouse in order to avoid eventual damages that can make the motor functioning not adequate.

During handling operations, make sure that the motor shaft and tachometer shaft (if present) don't receive any hit, in order to avoid motor damage.

During all operations of lifting and handling, never movimentate motors by hand but use adequate tools. In order to avoid that motor can falls, creating danger for authorized working persons in the nearings, use one of following methods:


- use lifting slings of adequate capacity;
- use adequate eyebolt using the thread hole in the shaft end;
- HC2, HC3 and HC5 can be lifted and handled using an eyebolt located on the motor external diameter.

Refer to the following pictures.

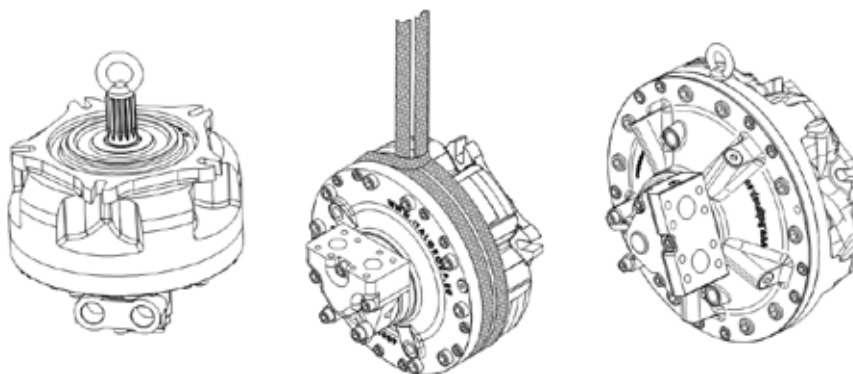

Motor storing

Storing must be carefully made using adequate storing tools (for example boxes, pallets, etc...) that can guarantee that the motor is stable and cannot move without control, in order to avoid damage problems. Make sure that the weight of the motor doesn't be substained by the motor shaft or by the tachometer shaft (if present).

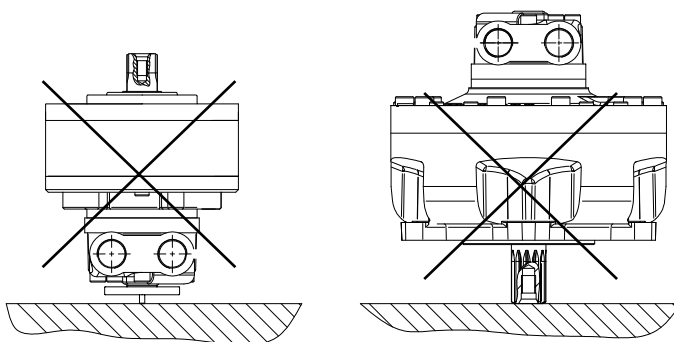

HC series motors are supplied together with plastic plugs, that keep the hydraulic oil (that was used during final test in Italgrou testing workbench) inside the motor. A thin oil film is present on the internal motor parts, whereas the external parts are covered with antirust oil that prevents damage from oxidation and corrosion.

Therefore the motors can be safely stored into the customer warehouse without performance losses for long periods (up to 4-6 months).

The storing location must has some important characteristics:

- room temperature comprised between -15°C and +55°C without fast and/or excessives temperature excursions;
- low relative humidity;
- absence of aggressive and corrosive medias in the motor nearings.

In particular, if motor should be motionless for more than 4-6 months, it must be protected against internal rust. Proceed as follows:

- fill the motor case with hydraulic oil. After that the motor case is full of oil, close it with a screw plug;
- fill the motor also from inlet or outlet port. Turn the shaft by hand (the shaft must make about one revolution) and finally close the inlet and outlet ports.

Please note that the plastic plugs are necessary not only to keep the hydraulic oil inside the motor, but even to avoid that dirt and other fluids (like water for example) can enter into the motor and create damage during storing or during motor start-up. Therefore make sure all drain ports, supply ports and discharge ports are closed during motor handling and storing. If plugs are missing, use plastic plugs or adequate systems in order to guarantee that the motor is well protected by dirt and other fluids.

Maintenance operations All the assembly and maintenance works must be performed when the motor is stopped and not connected to any power source, in order to avoid an accidental start-up. In addition the pressure inside the motor must be set to zero (the motor must be depressurized) before to perform maintenance operations.

The motor maintenance must be performed by instructed and experienced personnel only, following carefully Italgroupp advices and procedures.

HC series motors are internally lubricated by the operating fluid, if the motors are used according to the technical data reported into the HC catalogue, they need very limited maintenance operations. In order to achieve good performances, long bearings lifetime and safe working, the working fluid must be carefully selected in function of the operating parameters (a fundamental parameter is the ambient temperature range). In case of fire resistance fluid usage, some limitation on pressure and speed can be required. Refer to hydraulic fluid recommendations section for more information. If required please contact Italgroupp technical department for further information.

Motor parts	Material
Motor shaft, cylinders, rollers, pins, screws, distributor bush, rotating distributor, distributor joint, pistons, ring for rod.	Steel
Motor case, motor flange, distributor body	Cast iron
Distributor disk	Bronze
Slippers	Charged PTFE, PTFE
O-Rings	Elastomer
Radial shaft seal rings	Elastomer

Bearings

The bearing life depends by different factors, like bearing type, motor speed, working pressure, external loads, duty cycle, fluid viscosity, oil cleanliness, type and temperature.

Lifetime is measured by L_{10} which is called "theoretic lifetime". It represents the number of cycles that 90% of identical bearings can effort at the same load without showing wear and tear.

Please refer to bearing lifetime diagrams reported in the following pages to obtain the theoretical bearing lifetime. **The lifetimes diagrams shown the L_{50} median or average lifetime, that can be considered as 5 times L_{10} .**

Please note that the theoretical lifetime can be different from the real lifetime, especially in case of heavy duty applications with continuous work cycle. Please contact Italgroupp S.r.l. for more information.

Motor creep speed

The hydraulic motor is able to hold the load acting as a brake (if proper valves or circuit are considered and installed), but a certain creep speed is always present: this is typical of all brands hydraulic motors.

The motor creep speed depends by many factors, like operating conditions (motor displacement and type, pressure load on the shaft, oil viscosity, type and temperature) and are represented in the creep speed diagrams (see performance diagrams for each motor size). **The creep speed diagrams are shown for an hydraulic oil at reference conditions of 40 cSt.**

If creep speed is higher than desired value a negative brake can be considered: Italgroupp can supply negative brakes that can be fitted to the hydraulic motor. Please contact Italgroupp S.r.l. for more information.

Special features

Marine painting

If needed, special painting or primers are available in order to guarantee optimal protection against normal corrosion and marine environment corrosion. The ordering code is MP. Please contact Italgroup S.r.l. for more information.

Speedy-sleeve


A special inox sleeve is available upon request. In case the motor is used in aggressive medias or environments, this can be very useful in order to protect the motor shaft surface located in proximity of the motor shaft seal. This improves the shaft and seal endurance respect to wear and corrosion. The ordering code is SPSL. Please contact Italgroup S.r.l. for more information.

High pressure shaft seal

Standard HC motors are supplied with high pressure shaft seals, the continuous drain pressure must be maximum 10 bar, whereas the peak drain pressure must be maximum 15 bar. In case the drain line can or must has a higher pressure, special shaft seals are available upon request. The ordering code is HPS. The drain pressure with HPS shaft seal can reach 20 bar continuous pressure and 25 bar peak pressure. The HPS shaft seal is bi-directional also, so it can be used for example in underwater applications. Please contact Italgroup S.r.l. for more information.

Counterclockwise rotation

Standard HC motors are supplied with clockwise distributor timing. Please refer to the installation drawings of each section for more information. With ordering code CCW the motor is supplied with counterclockwise rotation timing. Contact Italgroup for more information.

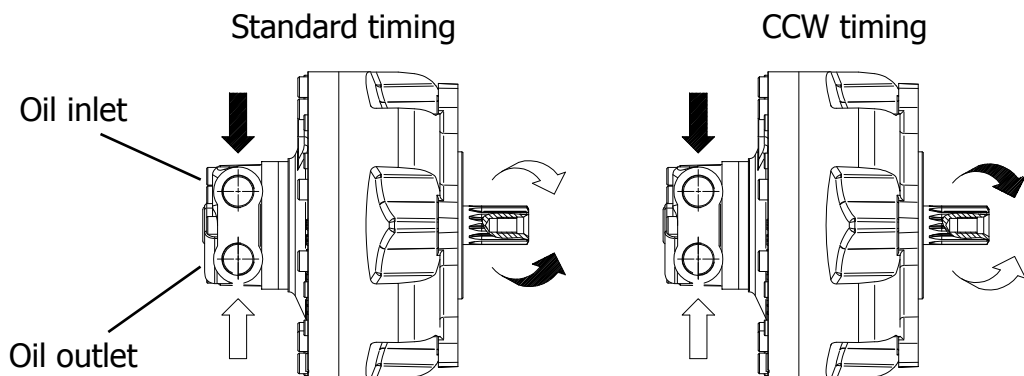



Cavitation and freewheeling

In hydraulic special applications like for example drilling machines, mobile applications, cavitation may be present. Infact when the motor is forced to run at a certain speed that requires an oil flow that is not disposable from the pump, in a transitory or continuous situation, the oil pressure inside the motor pistons decrease and can cause many problems like tractive forces on connecting rods retaining rings, metallic erosion (due to the air/vapour bubbles that develop when the piston pressure is very low and explodes when pressure rise above the equilibrium vapour pressure) and overheating.

It's always better to avoid motor cavitation or at least reduce it during operation (installing for example proper valves and using well designed circuits) but when this event cannot be avoided HC series motors are a very good solution in order to guarantee the correct motor operation in a safe and efficient way. It's always good to take into consideration circuit modifications in order to avoid cavitation, mainly because the other components that are present in the circuit can be more sensible to the problem than the HC motor, therefore the HC can have an efficiency loss not due to the motor characteristics but to a bad cavitation resistance of the other circuit components.

Pressurization circuit

Please notice that using an auxiliary pump or a proper designed oil accumulator, in many cases (through the low pressure pipe pressurization) cavitation can be avoided or in all cases much reduced.




Low speed freewheeling circuit

When the freewheeling requested speed is not high, the circuit shown on the left can be used. The speed for example can be controlled through a variable throttle valve. The main problem is that especially when throttle is acting, oil temperature can reach critical values.

High speed freewheeling circuit

Realizing the freewheeling in this particular way the motor operates without oil into the pistons, so the energy consumption is always the same and independent by the motor speed. In addition this energy loss is very low. This is the most suitable circuit for high speed freewheeling operation.



TROUBLESHOOTING

Problem	Possible cause	Solution
Excessive noises	Cavitation	Adopt an anti-cavitation system
	Mechanical vibrations	Check and fix damaged components
	Irregular pressure or flow	Check other components (pump, valves, accumulators) and check drain flow
	Air bubbles in the circuit	Bleed circuit
Unit overheating	Overflow	Check max allowed flow
	Overpressure	Check relief valve pressure setting
	Oil viscosity too low	Choose the appropriate oil according to the temperature
	Undersized cooling system	Improve cooling system
	Working without oil in the case	Overhaul the unit, fill with oil before start-up
Anomalous drainage flow	Worn motor internal components	Overhaul the motor
	Motor internal seals worn	Overhaul the motor
	Excessive pressure in the motor case	Check drain port size, pressure and flow, check piping connections
Insufficient torque	Pressure relief valve set incorrectly	Check relief valve pressure setting
	Undersized motor displacement	Replace with bigger displ. motor
	Pump not able to reach the design pressure	Check pump integrity
Insufficient speed	Oversized motor displacement	Replace with smaller displ. motor
	Pump not able to reach the design flow	Check pump integrity
	Undersized pump	Improve pump output flow
	Excessive drain flow	Overhaul the motor
Output shaft cannot rotate	Seized motor flow distributor	Overhaul the flow distributor
	Motor internal seizure	Overhaul the motor
	Motor internal seals worn	Check drain flow, overhaul the motor
	Air in the circuit	Bleed the circuit

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

TROUBLESHOOTING

Problem	Possible cause	Solution
Oil leakage	Worn seals	Replace seals
	Excessive pressure in the motor case	Check drain port size, pressure and flow, check piping connections
	Burst motor shaft seal	Check drain port size, pressure and flow, check piping connections
Incorrect sense of rotation	Pipes incorrectly connected	Check pipe connections
	Incorrect rotating distributor timing	Change rotating distributor timing


ITALGROUP SRL
HC SERIES - HC05

GENERAL CATALOGUE

INDEX - HC05

<u>HC05 - INSTALLATION DRAWING</u>	Pag	28 - 29
<u>HC05 - PERFORMANCE DIAGRAMS</u>	"	30 - 35
<u>ORDERING CODE</u>	"	36

INSTALLATION DRAWING

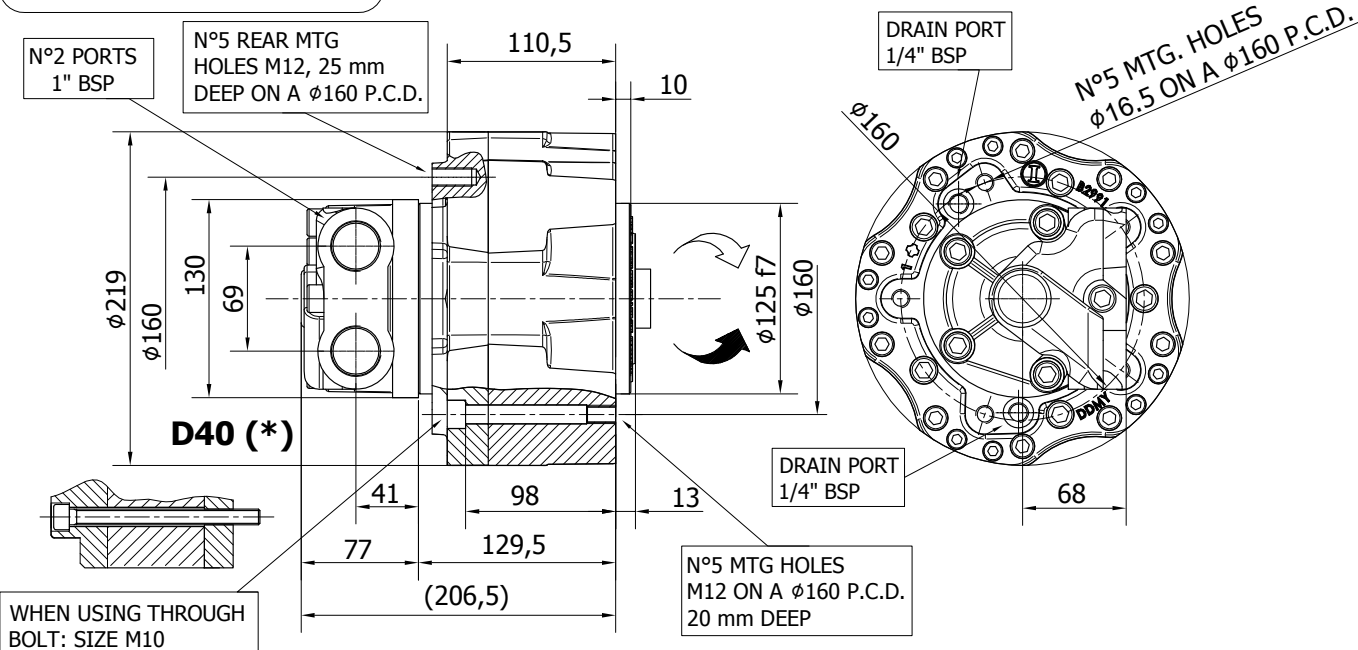

TECHNICAL DATA

		40	60	75	90	110	130	150	175	200	250
DISPLACEMENT	[cc]	40	60	74	91	115	129	151	166	191	226
SPECIFIC TORQUE	[Nm/bar]	0,62	0,97	1,20	1,40	1,84	2,05	2,40	2,65	3,04	3,60
MAX. CONT. PRESSURE	[bar]	250	250	250	250	250	250	250	250	250	250
HYDROSTATIC TEST PRESSURE	[bar]	420	420	420	420	420	420	420	420	420	420
MAX. CONT. SPEED	[rpm]	1200	1200	1200	1100	850	850	850	750	750	600
PEAK SPEED (***)	[rpm]	1400	1400	1400	1300	1100	1100	1100	1000	1000	800
MAX. CONT. POWER (****)	[kW]	16	25	32	32	35	35	35	35	35	35
PEAK POWER	[kW]	25	35	50	50	55	55	55	55	55	55
MAX. CASE PRESSURE	[bar]	6	6	6	6	6	6	6	6	6	6
DRY WEIGHT	[kg]	30	30	30	30	30	30	30	30	30	30
TEMPERATURE RANGE (**)	[°C]	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70

- (*) The standard distributor (D40) is shown. Please refer to distributors section (pag. 82-83) for different distributor interfaces.

- (**) Please refer to the hydraulic fluid recommendations (pag. 8-9).


- (***) Do not exceed maximum continuous power with flushing (pag. 11).

- (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required.



For more information please contact our technical department.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.





SHAFT CONFIGURATIONS

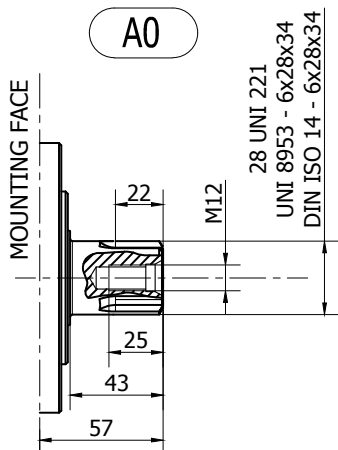

Available spline billet: (SB14)

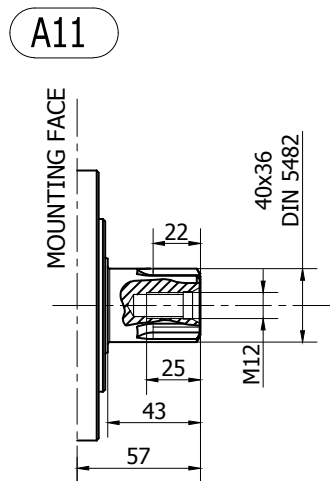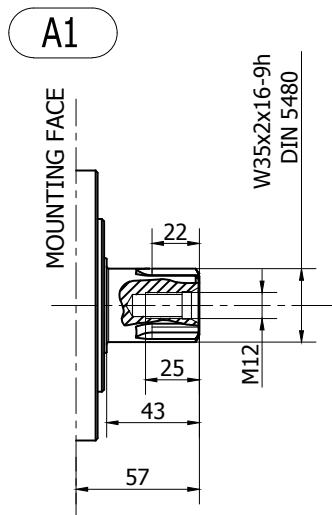


Available spline billet: (SB13)

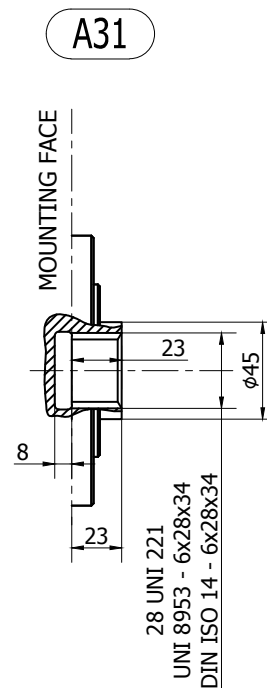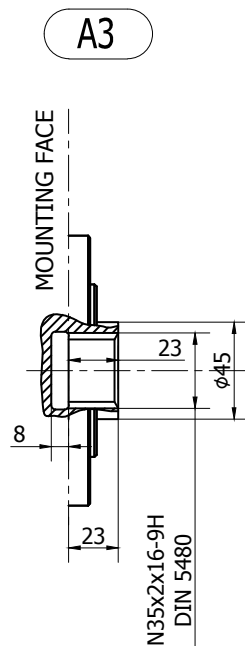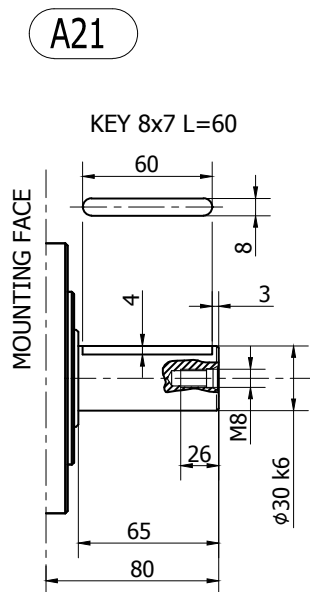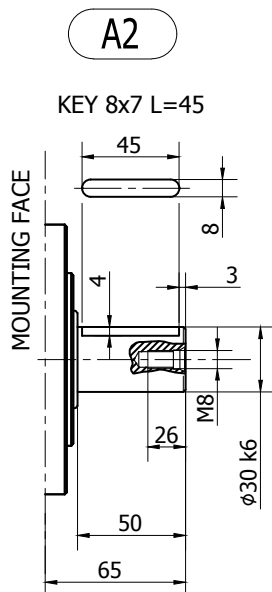


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

HC05- PERFORMANCE DIAGRAMS

40 cc

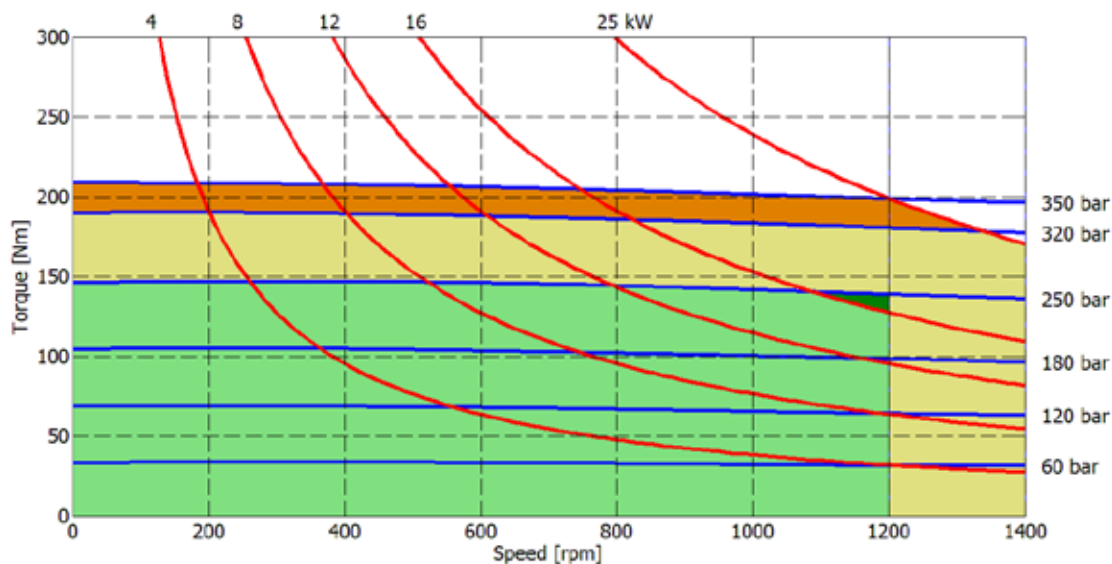

60 cc

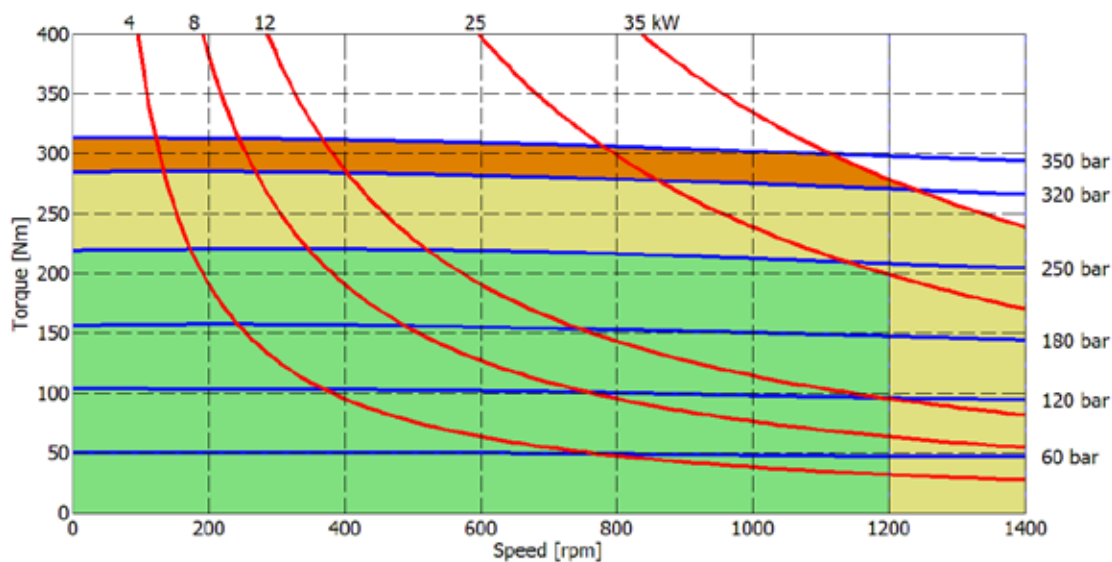


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.

HC05- PERFORMANCE DIAGRAMS

75 cc

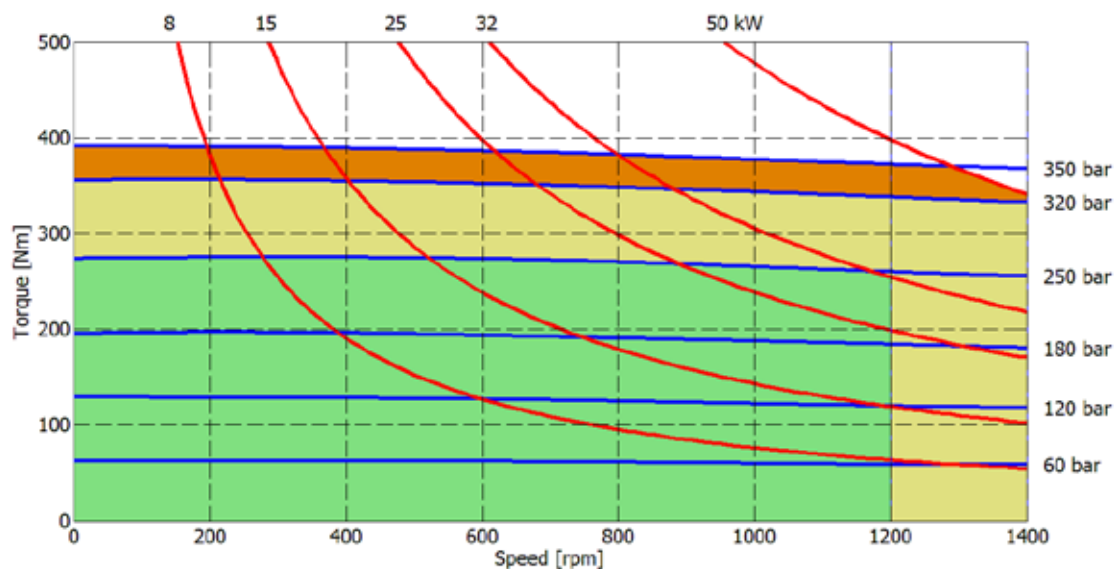

90 cc

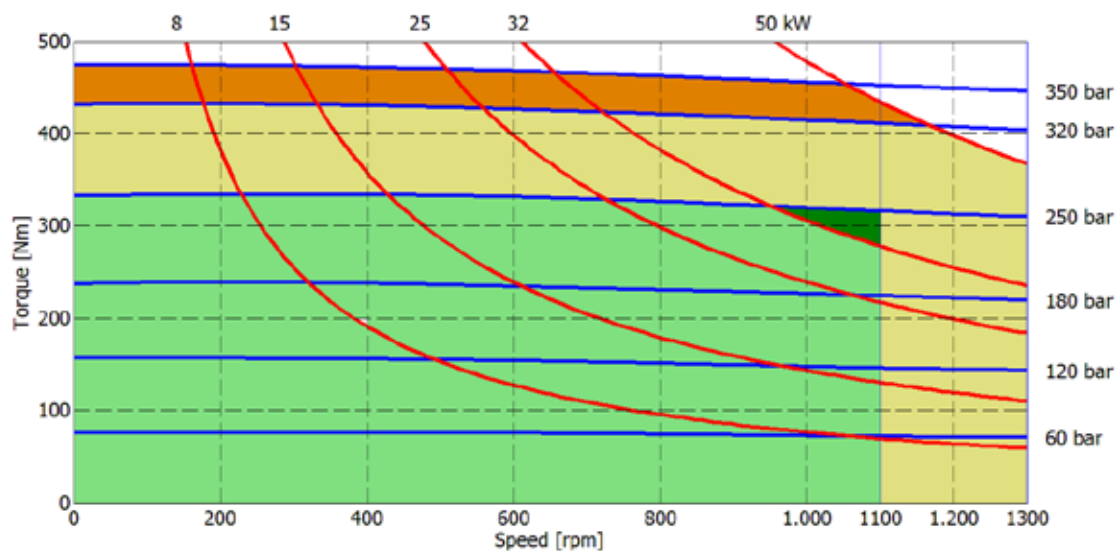


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

HC05- PERFORMANCE DIAGRAMS

110 cc

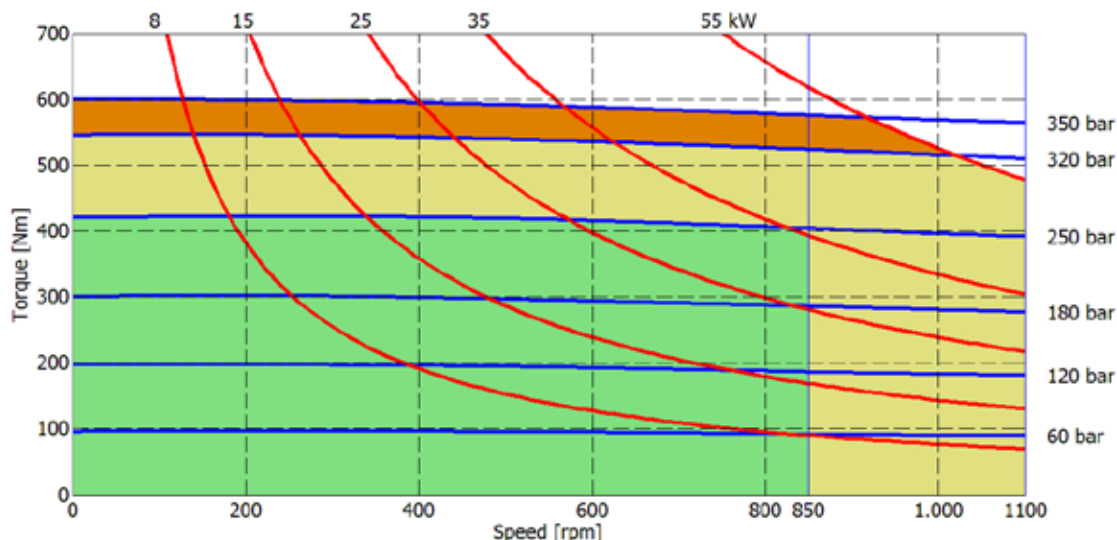

130 cc

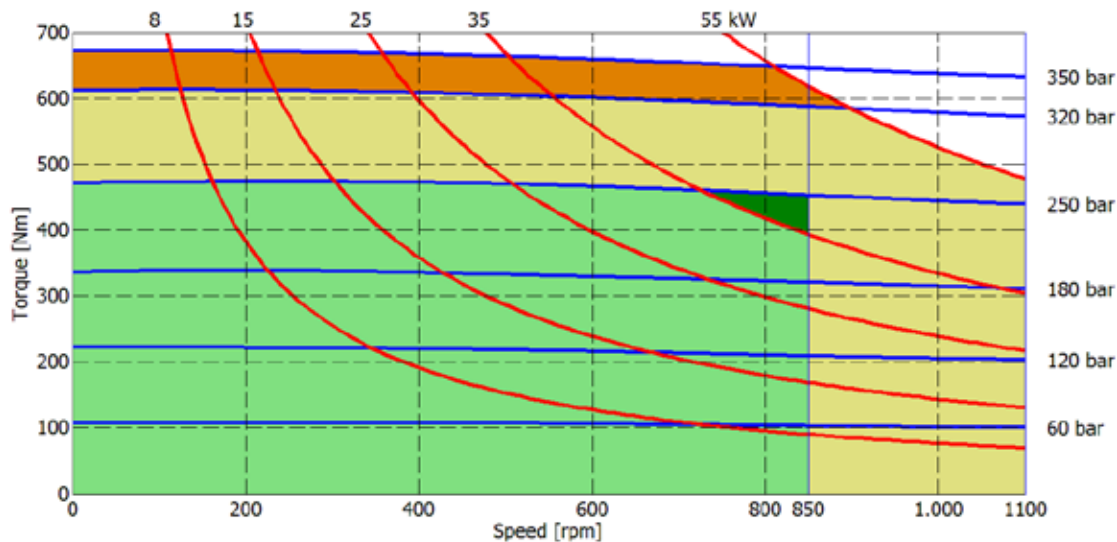


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. ItalgrouP S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of ItalgrouP S.r.l. is strictly forbidden.

HC05- PERFORMANCE DIAGRAMS

150 cc

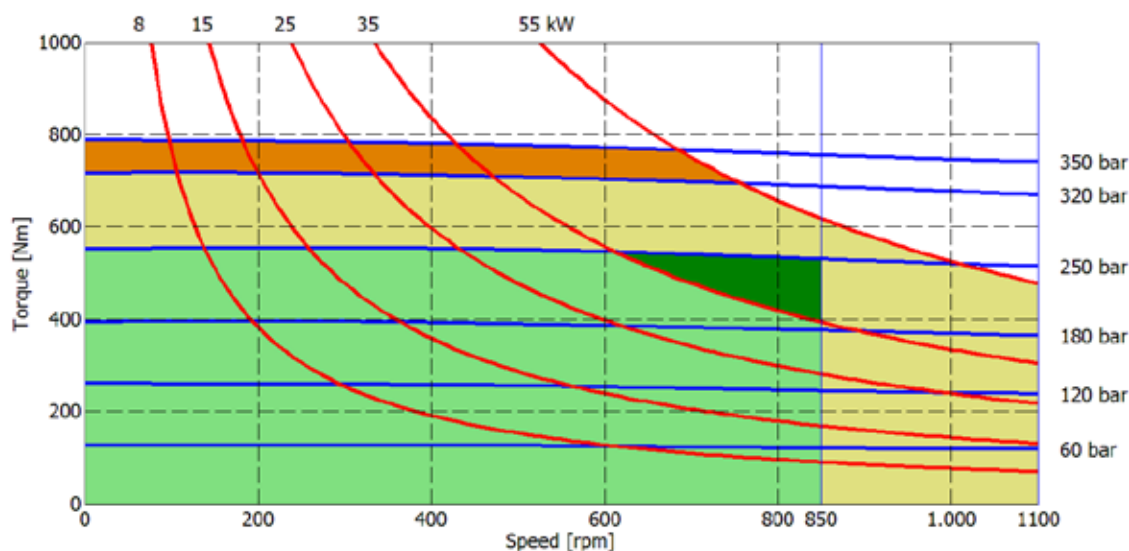

175 cc

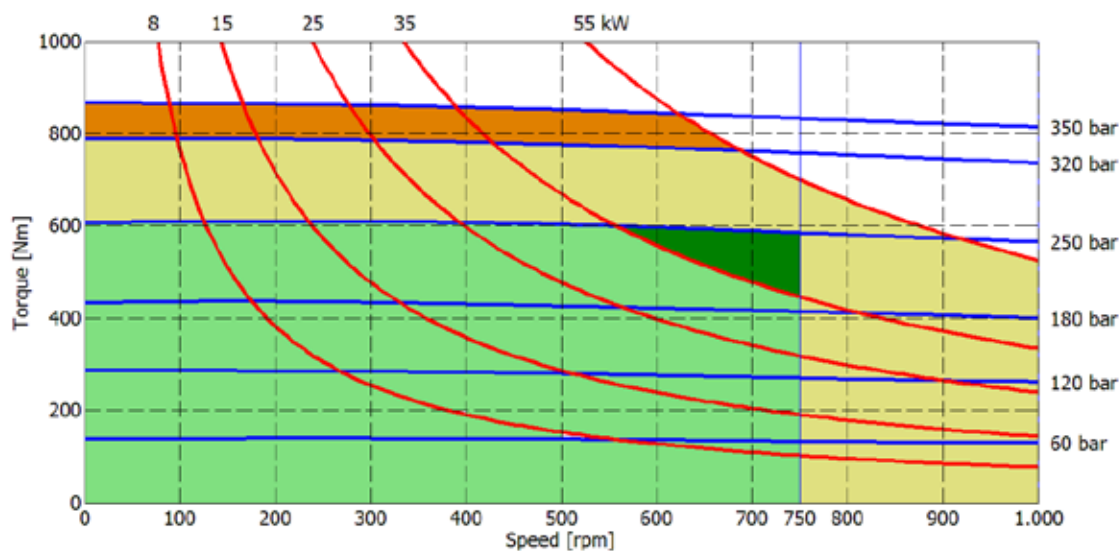


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

HC05- PERFORMANCE DIAGRAMS

200 cc

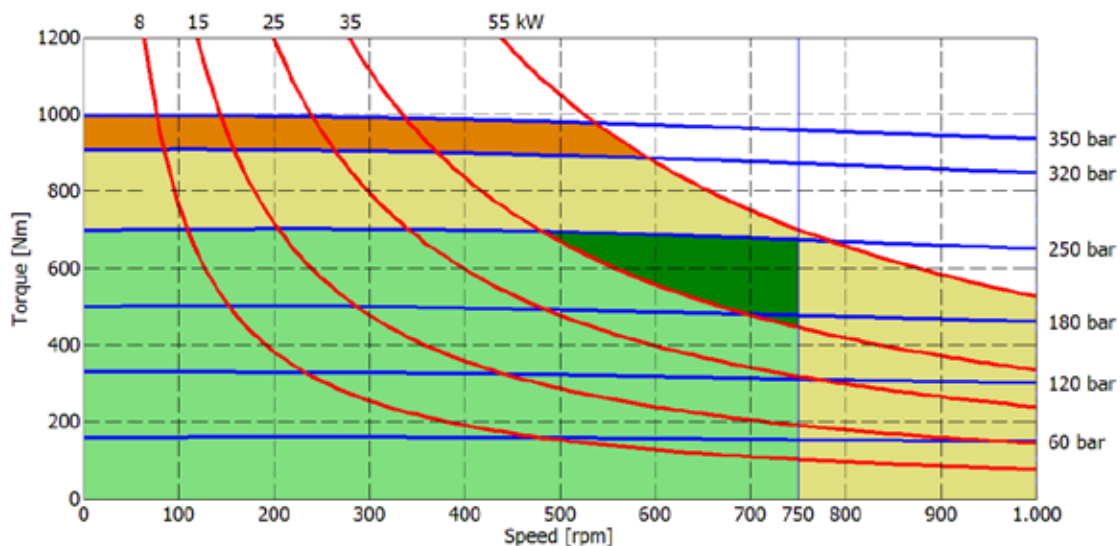

250 cc

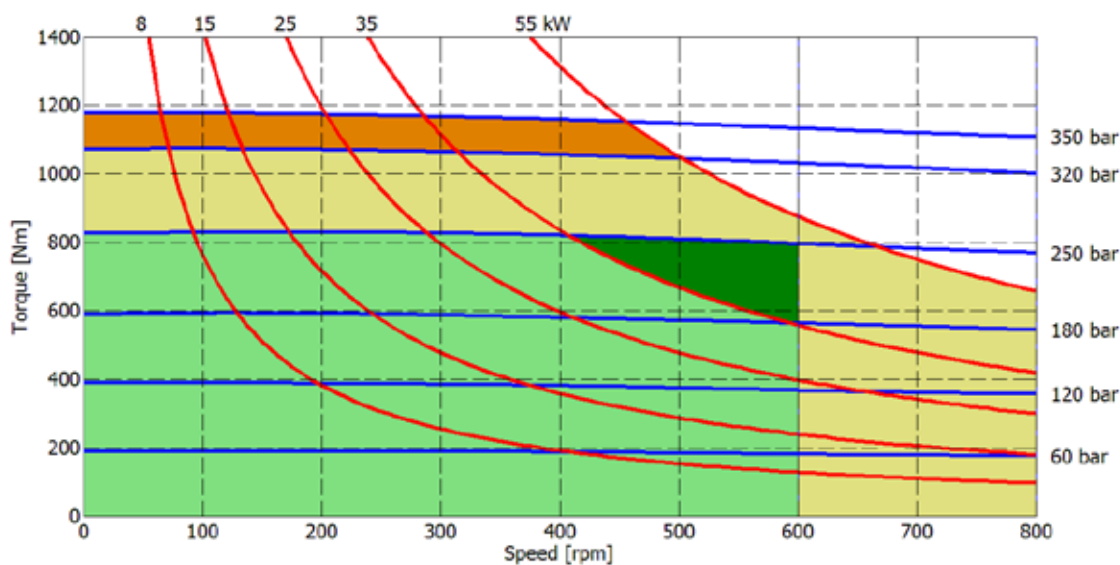


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.

BEARING LIFE

Reference displacement 110 cc

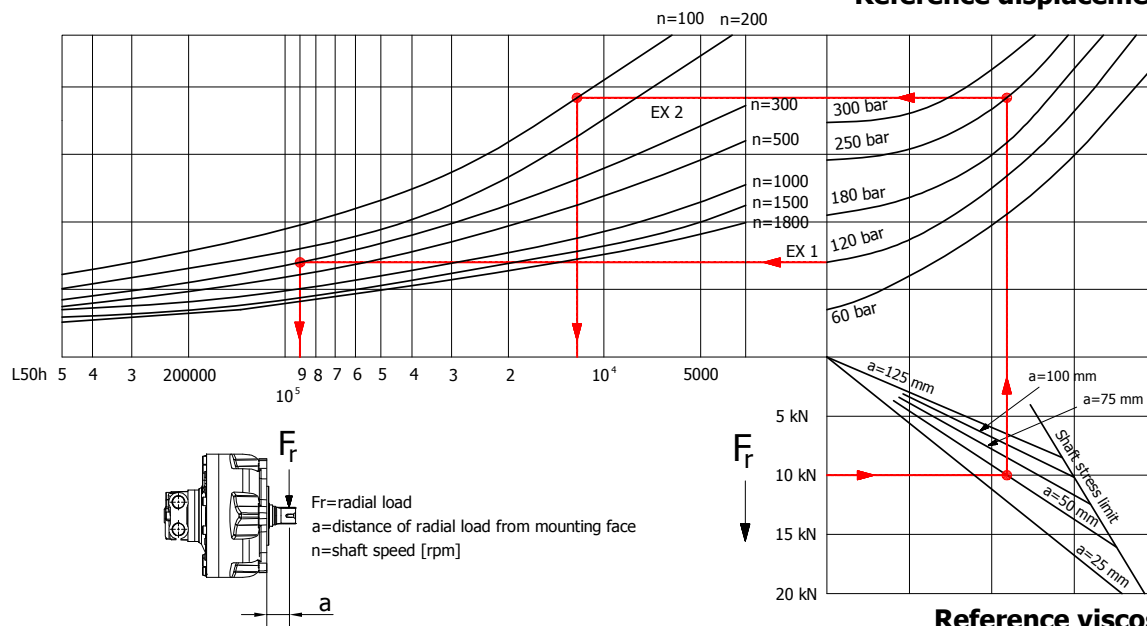

Reference viscosity: 40 cSt

Example:

We suppose (EX1): $p=120$ [bar], $n=300$ [rpm]; we obtain an average lifetime of 90000 [h].

If we suppose (EX2): $F_r=10$ [kN], $a=50$ [mm], $n=100$ [rpm] and $p=250$ [bar] we obtain an average lifetime of 11000 [h].

HC05- ORDERING CODE

HC	05	---	--	--	--	--	SB -
----	----	-----	----	----	----	----	------

DISPLACEMENT

40	60	75	90
110	130	150	175
200	250		

SHAFT

A0	A1
A11	A2
A21	A3
A31	

TACHOMETER

J (*)
TA
TB
TT1
TQ1
EST
EST30
EST31

See pag. 90-93

(*) Tachometer predisposition

SPECIAL FEATURES

HSM
See pag. 7
MP
SPSL
HPS
CCW
See pag. 23
Z - -
Italgroupp internal code

DISTRIBUTOR


D31B	D36B
D310B	D40
D47	D416

See pag. 88-89

SPLINE BILLET

SB13	SB14
------	------

See pag. 94




ITALGROUP SRL
HC SERIES - HC1

GENERAL CATALOGUE

INDEX - HC1

<u>HC1 - INSTALLATION DRAWING</u>	Pag	38 - 39
<u>HC1/C190 - INSTALLATION DRAWING</u>	"	40 - 41
<u>HC1 - PERFORMANCE DIAGRAMS</u>	"	42 - 46
<u>ORDERING CODE</u>	"	47

INSTALLATION DRAWING

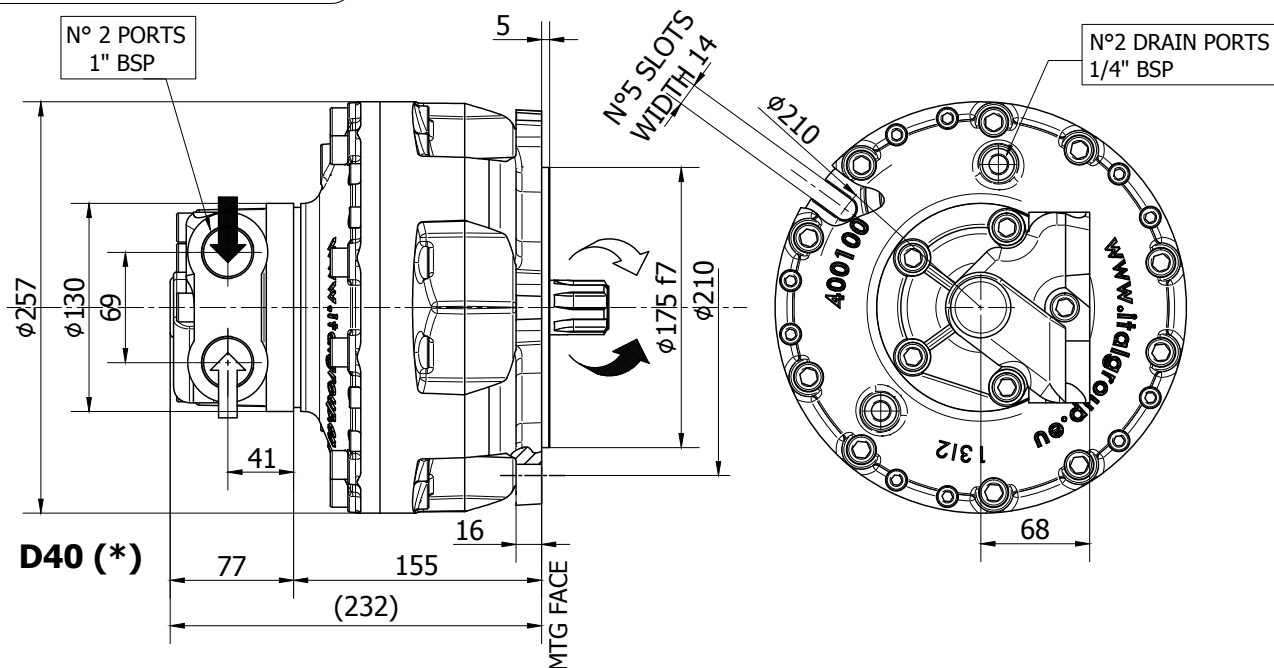

TECHNICAL DATA

		100	150	175	200	220	250	300	330
DISPLACEMENT	[cc]	98	154	173	200	221	243	289	315
SPECIFIC TORQUE	[Nm/bar]	1,57	2,45	2,74	3,20	3,52	3,88	4,61	5,01
MAX. CONT. PRESSURE	[bar]	250	250	250	250	250	250	250	250
HYDROSTATIC TEST PRESSURE	[bar]	420	420	420	420	420	420	420	420
MAX. CONT. SPEED	[rpm]	1100	700	700	600	600	600	550	450
PEAK SPEED (***)	[rpm]	1250	1000	1000	900	800	800	700	650
MAX. CONT. POWER (****)	[kW]	40	40	45	45	48	50	50	50
MAX. CONT. POWER WITH FLUSHING	[kW]	60	60	75	75	75	75	75	75
MAX. CASE PRESSURE	[bar]	6	6	6	6	6	6	6	6
DRY WEIGHT	[kg]	35	35	35	35	35	35	35	35
TEMPERATURE RANGE (**)	[°C]	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70

- (*) The standard distributor (D40) is shown. Please refer to distributors section (pag. 82-83) for different distributor interfaces.


- (**) Please refer to the hydraulic fluid recommendations (pag. 8-9).

- (***) Do not exceed maximum continuous power with flushing (pag. 11).






- (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required. For more information please contact our technical department.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

SHAFT CONFIGURATIONS

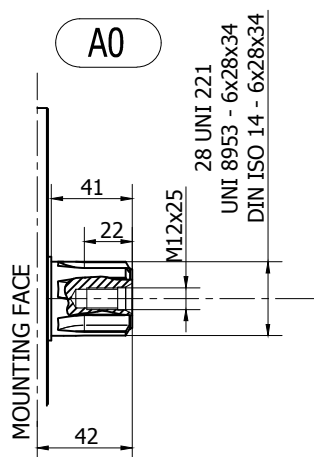


Available spline billet: (SB14)

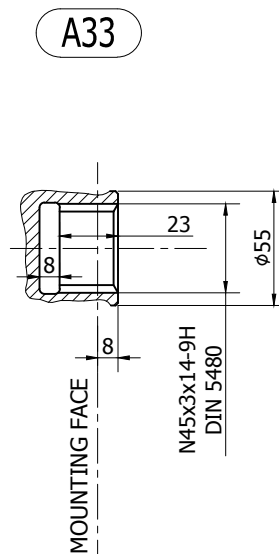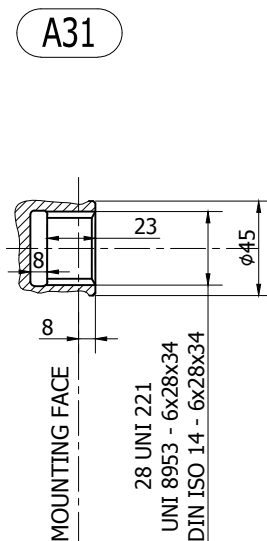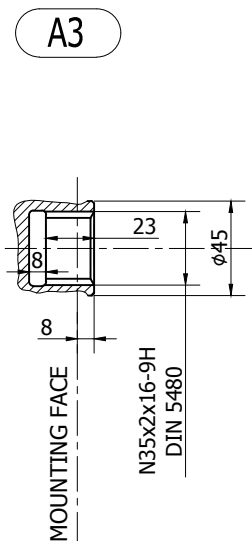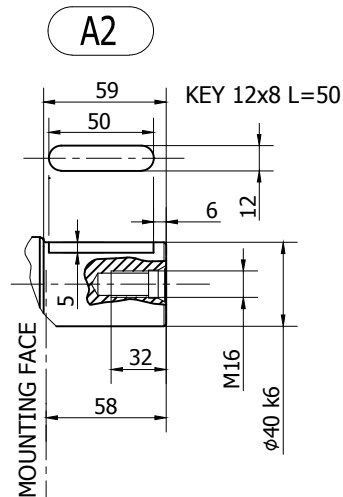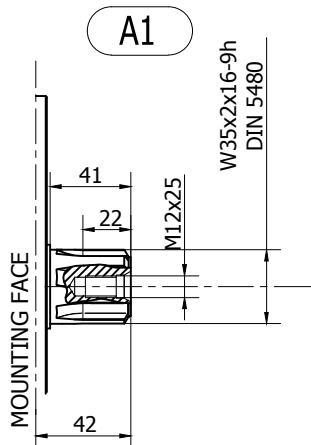

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

INSTALLATION DRAWING

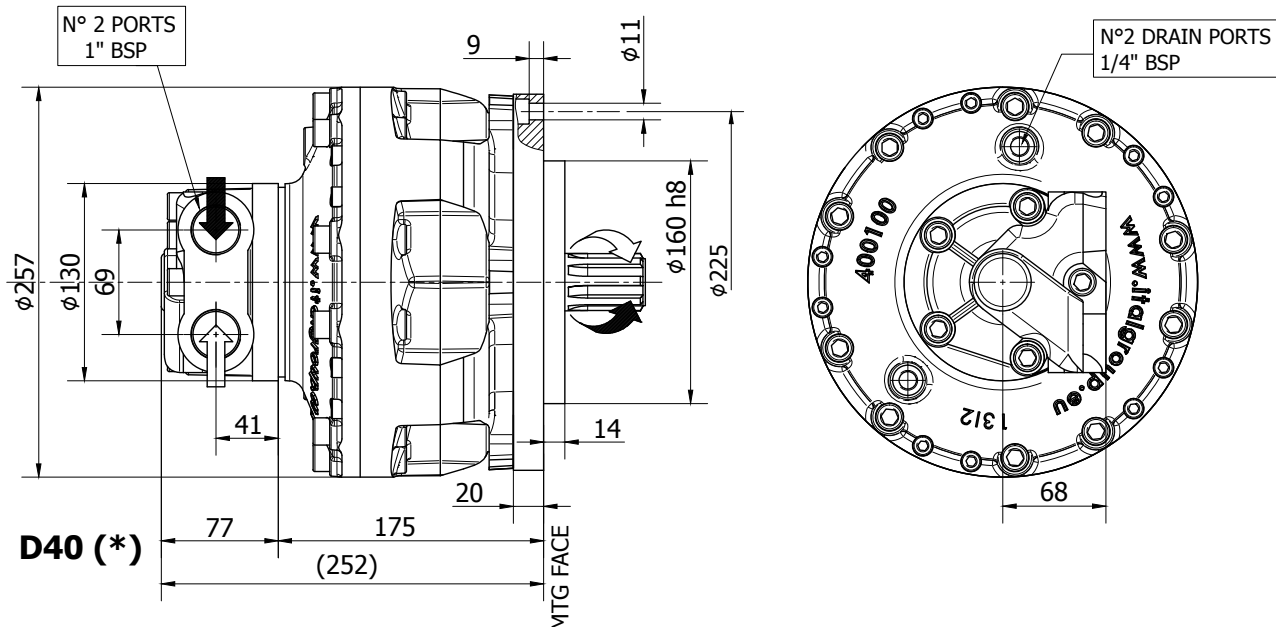

TECHNICAL DATA

		100	150	175	200	220	250	300	330
DISPLACEMENT	[cc]	98	154	173	200	221	243	289	315
SPECIFIC TORQUE	[Nm/bar]	1,57	2,45	2,74	3,20	3,52	3,88	4,61	5,01
MAX. CONT. PRESSURE	[bar]	250	250	250	250	250	250	250	250
HYDROSTATIC TEST PRESSURE	[bar]	420	420	420	420	420	420	420	420
MAX. CONT. SPEED	[rpm]	1100	700	700	600	600	600	550	450
PEAK SPEED (***)	[rpm]	1250	1000	1000	900	800	800	700	650
MAX. CONT. POWER (****)	[kW]	40	40	45	45	48	50	50	50
MAX. CONT. POWER WITH FLUSHING	[kW]	60	60	75	75	75	75	75	75
MAX. CASE PRESSURE	[bar]	6	6	6	6	6	6	6	6
DRY WEIGHT	[kg]	35	35	35	35	35	35	35	35
TEMPERATURE RANGE (**)	[°C]	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70

- (*) The standard distributor (D40) is shown. Please refer to distributors section (pag. 82-83) for different distributor interfaces.

- (**) Please refer to the hydraulic fluid recommendations (pag. 8-9).


- (***) Do not exceed maximum continuous power with flushing (pag. 11).

- (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required.


For more information please contact our technical department.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou p S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou p S.r.l. is strictly forbidden.


SHAFT CONFIGURATIONS

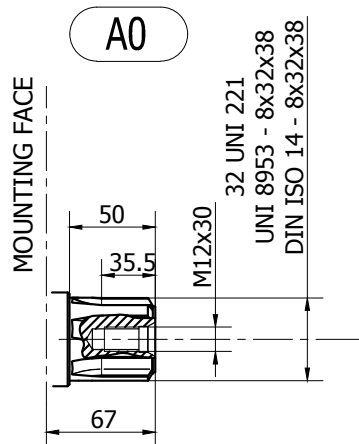

Available spline billet: **SB2**

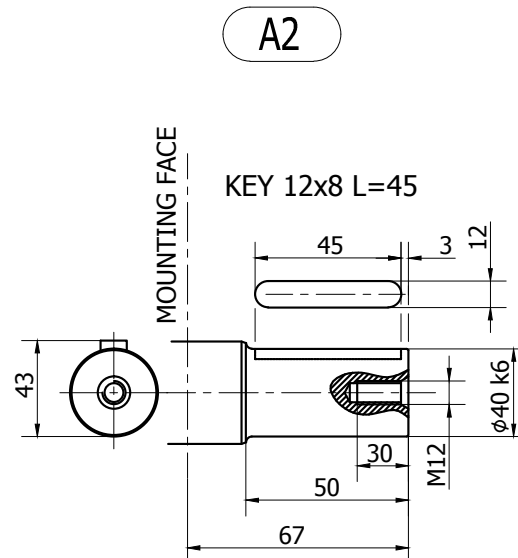


A3

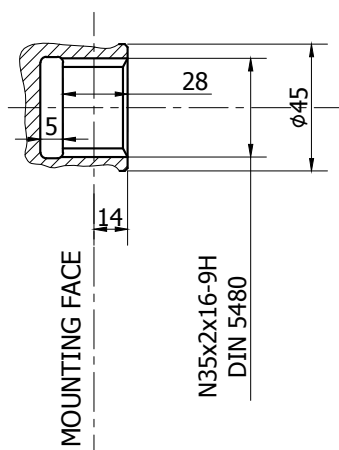


HC1- PERFORMANCE DIAGRAMS

100 cc

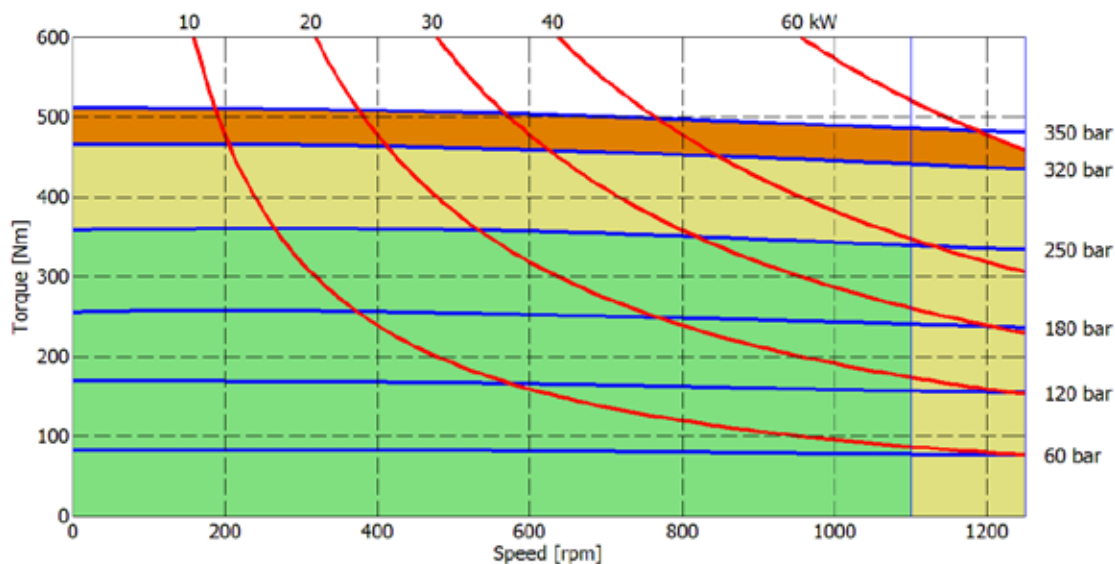

150 cc

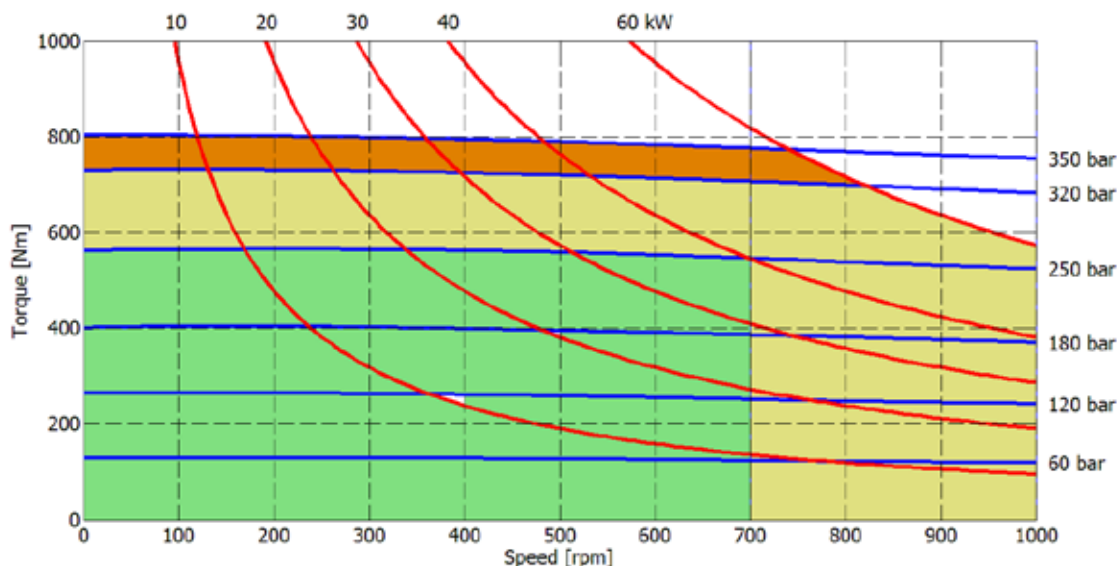


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. ItalgrouP S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of ItalgrouP S.r.l. is strictly forbidden.

HC1- PERFORMANCE DIAGRAMS

175 cc

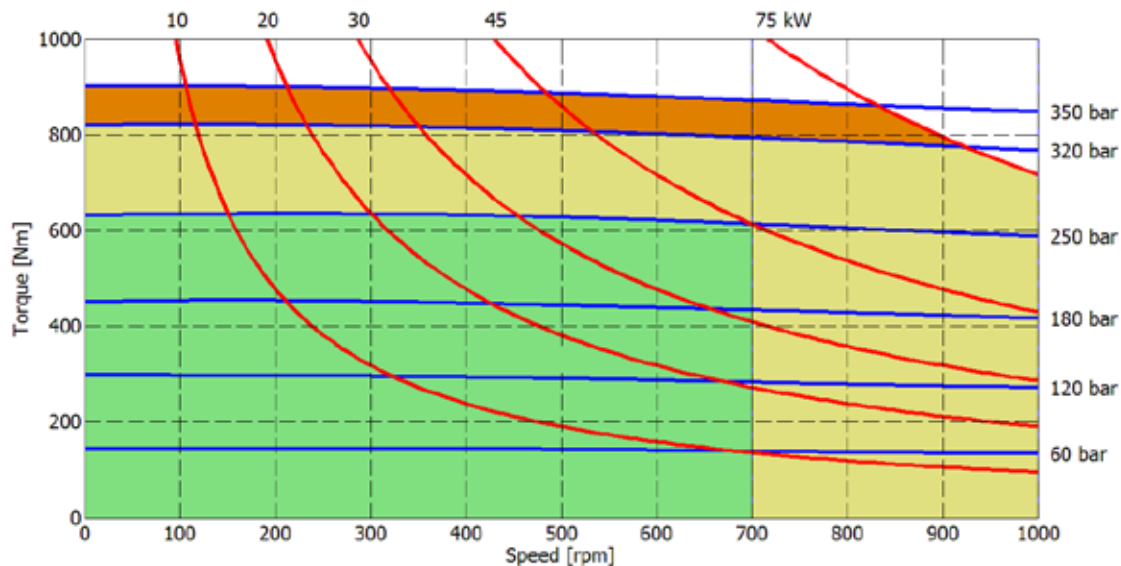

200 cc

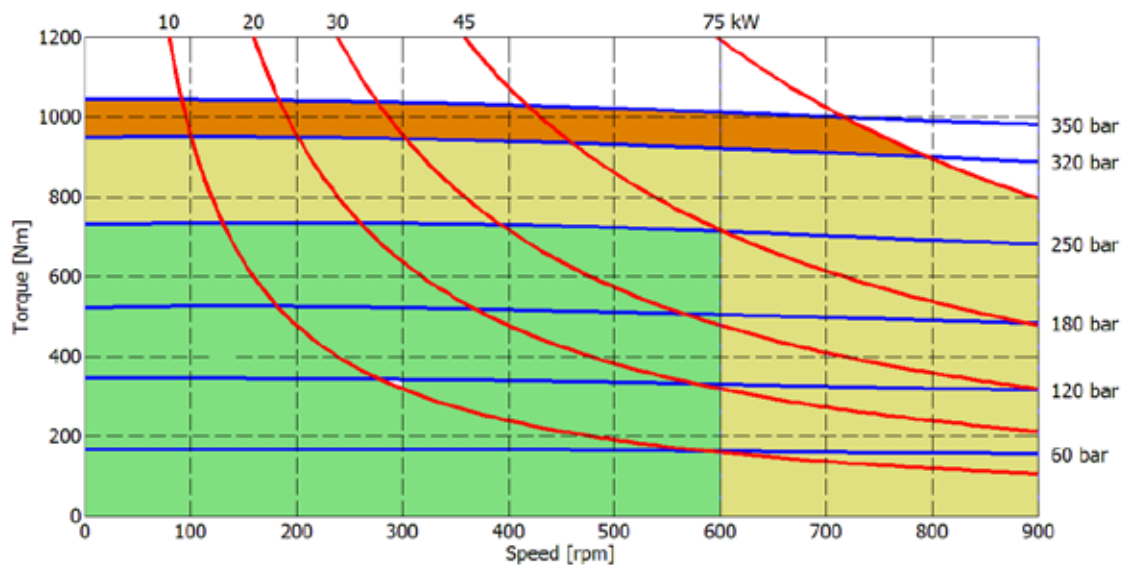


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

HC1- PERFORMANCE DIAGRAMS

220 cc

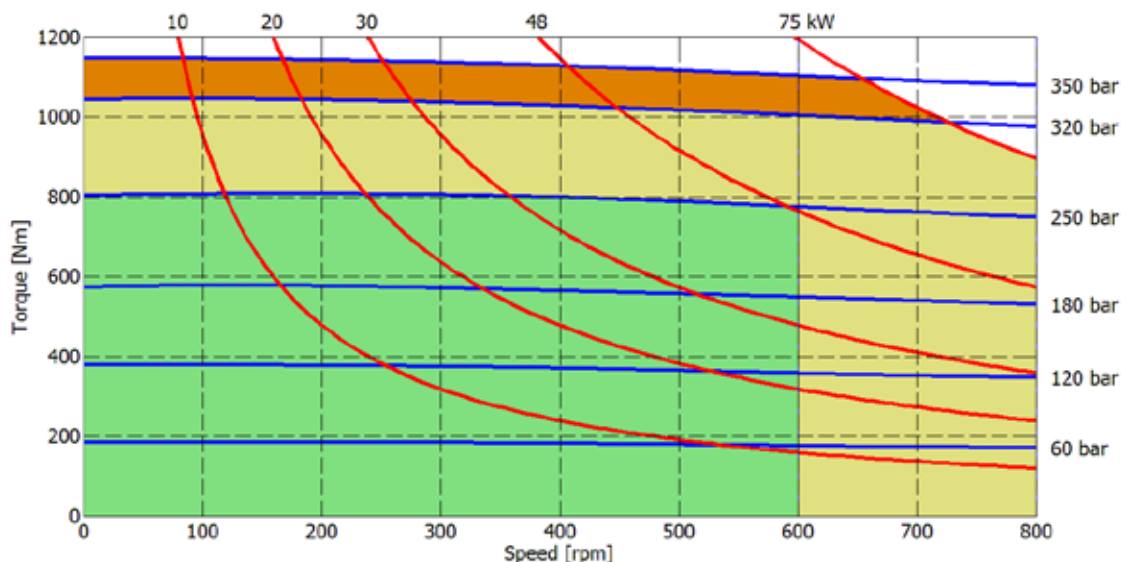

250 cc

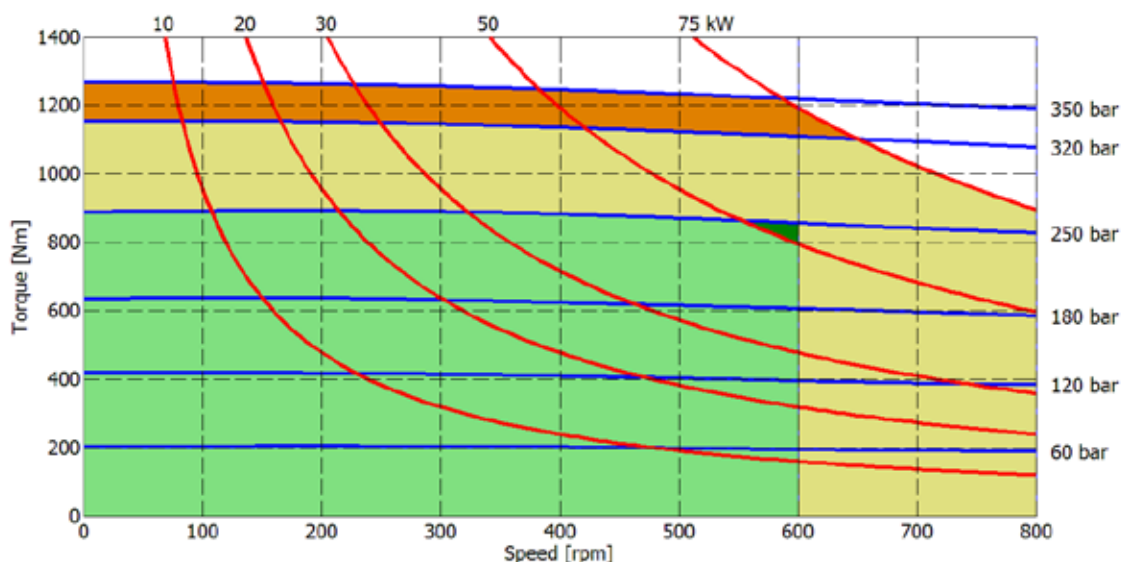


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.

HC1- PERFORMANCE DIAGRAMS

300 cc

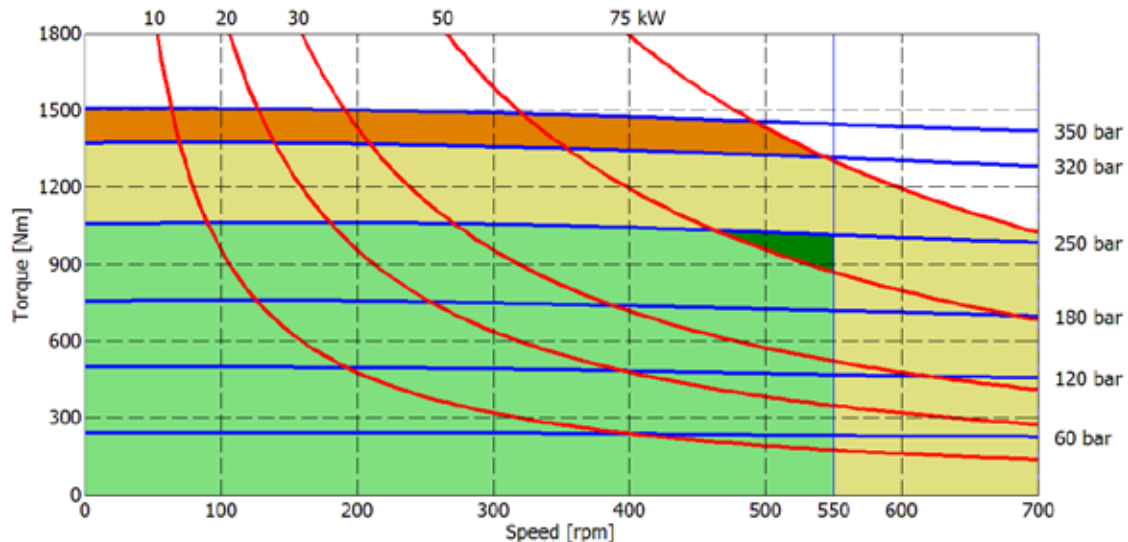

330 cc

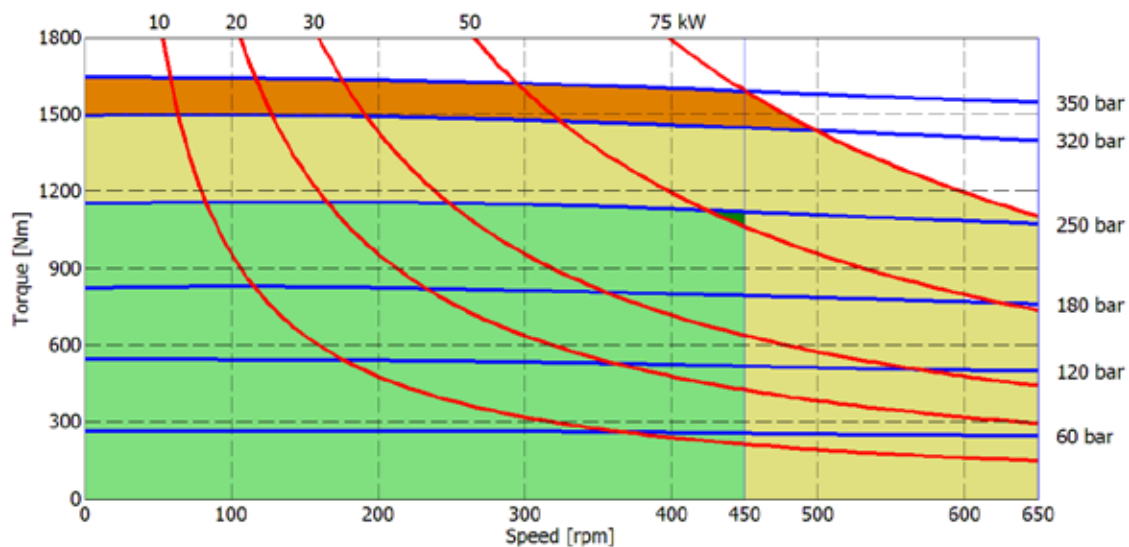


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

BEARING LIFE

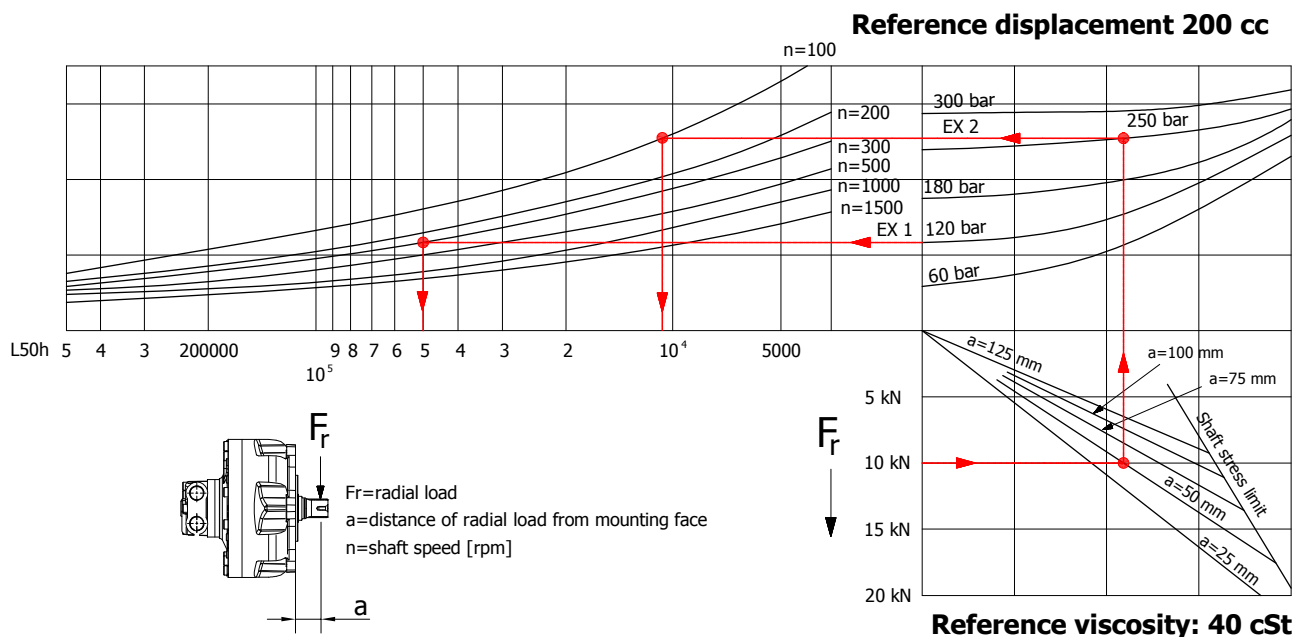

Example:

We suppose (EX1): $p=120$ [bar], $n=300$ [rpm]; we obtain an average lifetime of 50000 [h].

If we suppose (EX2): $F_r=10$ [kN], $a=50$ [mm], $n=100$ [rpm] and $p=250$ [bar] we obtain an average lifetime of 10500 [h].

HC1- ORDERING CODE

HC	1	---	--	--	--	--	--	SB -
----	---	-----	----	----	----	----	----	------

DISPLACEMENT

100	150	175	200
220	250	300	330

INTERCHANGEABILITY

/C190

SHAFT

A0	A1
A2	A3
A31	A33

DISTRIBUTOR

D31B	D36B
D310B	D40
D47	D416

See pag. 88-89

TACHOMETER

J	(*)
TA	
TB	
TT1	
TQ1	
EST	
EST30	
EST31	

See pag. 90-93

(*) Tachometer predisposition

SPECIAL FEATURES

HSM

See pag. 7

MP

SPSL

HPS

CCW

See pag. 23


Z - -

Italgroup
internal code

SPLINE BILLET

SB2	SB14
-----	------

See pag. 94

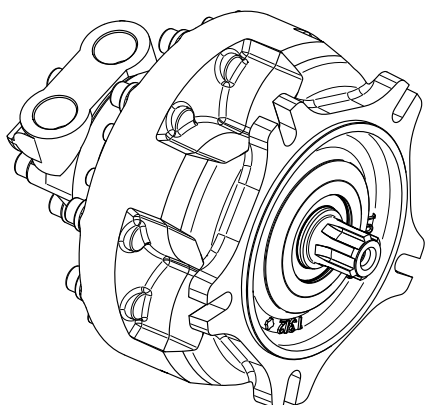


ITALGROUP SRL
HC SERIES - HC2

GENERAL CATALOGUE

INDEX - HC2

<u>HC2 - INSTALLATION DRAWING</u>	Pag	50 - 51
<u>HC2/C300 - INSTALLATION DRAWING</u>	"	52 - 53
<u>HC2/S2 - INSTALLATION DRAWING</u>	"	54 - 55
<u>HC2 - PERFORMANCE DIAGRAMS</u>	"	56 - 60
<u>ORDERING CODE</u>	"	61

INSTALLATION DRAWING

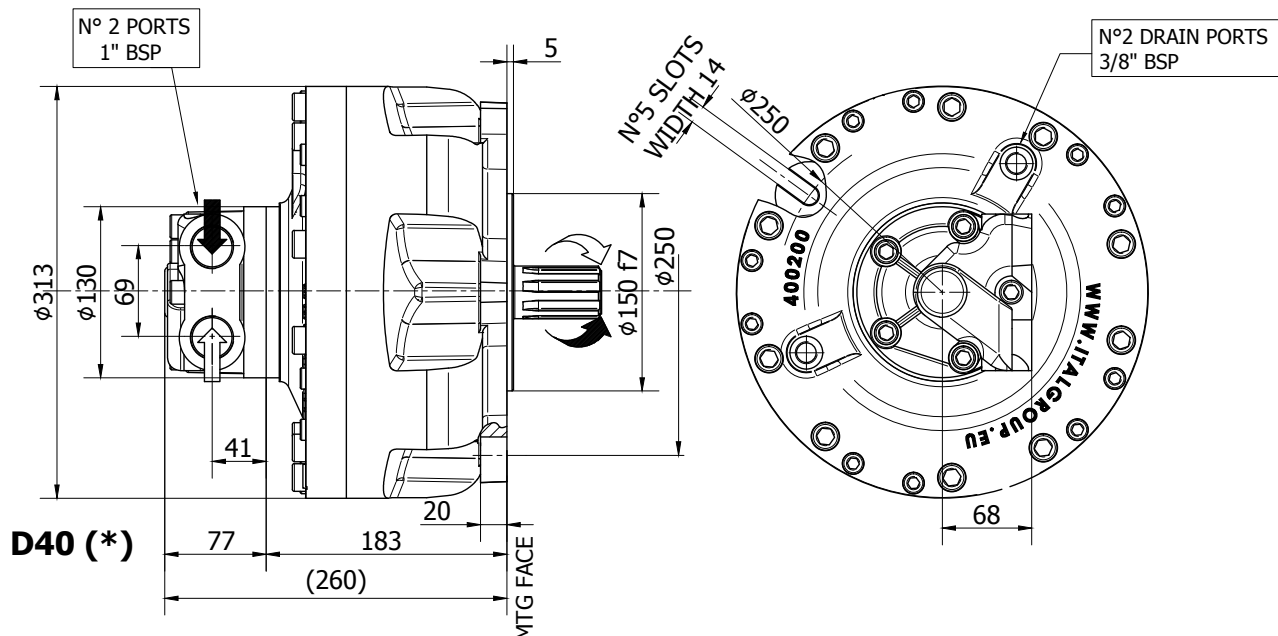

TECHNICAL DATA


		200	250	300	350	400	500	600	650
DISPLACEMENT	[cc]	193	251	305	348	424	493	566	624
SPECIFIC TORQUE	[Nm/bar]	3,06	4,00	4,84	5,52	6,76	7,84	9,00	9,92
MAX. CONT. PRESSURE	[bar]	250	250	250	250	250	250	250	250
HYDROSTATIC TEST PRESSURE	[bar]	420	420	420	420	420	420	420	420
MAX. CONT. SPEED	[rpm]	1200	950	800	650	600	520	480	440
PEAK SPEED (***)	[rpm]	1500	1150	950	800	800	700	650	620
MAX. CONT. POWER (****)	[kW]	75	75	75	75	75	75	75	75
MAX. CONT. POWER WITH FLUSHING	[kW]	105	105	105	105	105	105	105	105
MAX. CASE PRESSURE	[bar]	6	6	6	6	6	6	6	6
DRY WEIGHT	[kg]	53	53	53	53	53	53	53	53
TEMPERATURE RANGE (**)	[°C]	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70

- (*) The standard distributor (D40) is shown. Please refer to distributors section (pag. 82-83) for different distributor interfaces.
- (**) Please refer to the hydraulic fluid recommendations (pag. 8-9).
- (***) Do not exceed maximum continuous power with flushing (pag. 11).
- (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required. For more information please contact our technical department.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.


SHAFT CONFIGURATIONS

A0

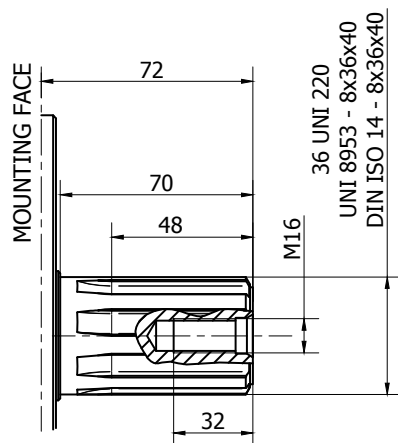


Available spline billet: **SB3**

A1

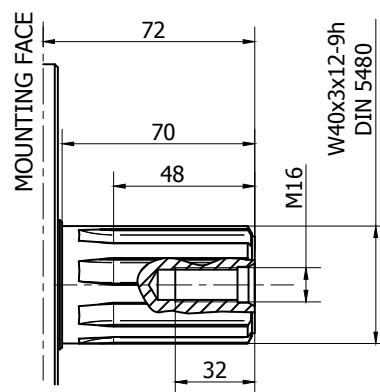


Available spline billet: **SB22**


A2

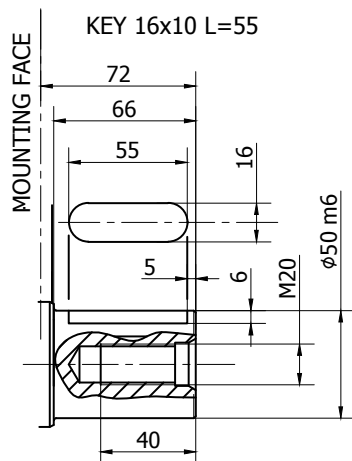


A3

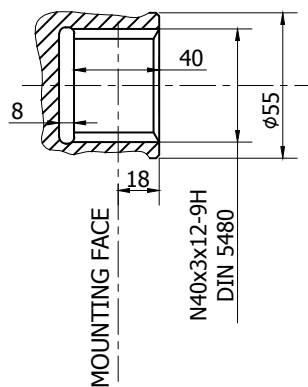

A31

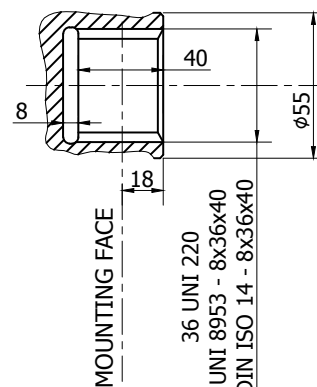

INSTALLATION DRAWING

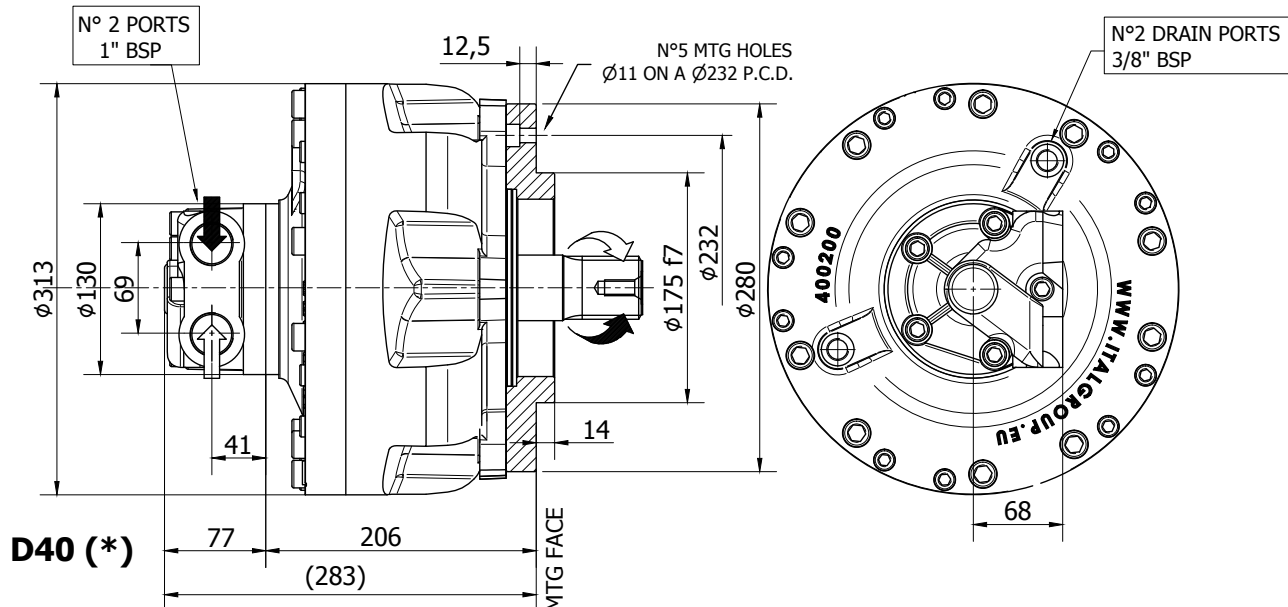

TECHNICAL DATA


		200	250	300	350	400	500	600	650
DISPLACEMENT	[cc]	193	251	305	348	424	493	566	624
SPECIFIC TORQUE	[Nm/bar]	3,06	4,00	4,84	5,52	6,76	7,84	9,00	9,92
MAX. CONT. PRESSURE	[bar]	250	250	250	250	250	250	250	250
HYDROSTATIC TEST PRESSURE	[bar]	420	420	420	420	420	420	420	420
MAX. CONT. SPEED	[rpm]	1200	950	800	650	600	520	480	440
PEAK SPEED (***)	[rpm]	1500	1150	950	800	800	700	650	620
MAX. CONT. POWER (****)	[kW]	75	75	75	75	75	75	75	75
MAX. CONT. POWER WITH FLUSHING	[kW]	105	105	105	105	105	105	105	105
MAX. CASE PRESSURE	[bar]	6	6	6	6	6	6	6	6
DRY WEIGHT	[kg]	53	53	53	53	53	53	53	53
TEMPERATURE RANGE (**)	[°C]	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70

- (*) The standard distributor (D40) is shown. Please refer to distributors section (pag. 82-83) for different distributor interfaces.
- (**) Please refer to the hydraulic fluid recommendations (pag. 8-9).
- (***) Do not exceed maximum continuous power with flushing (pag. 11).
- (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required. For more information please contact our technical department.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.


SHAFT CONFIGURATIONS

A0

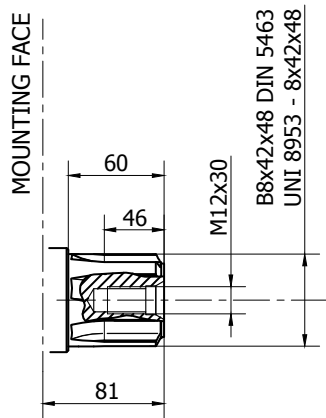


Available spline billet: **SB15**

A2

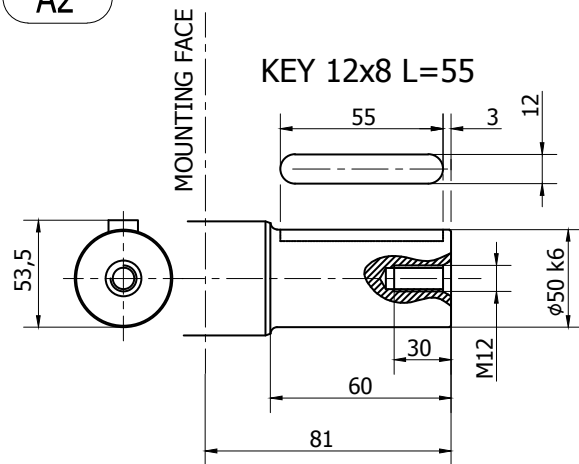

INSTALLATION DRAWING

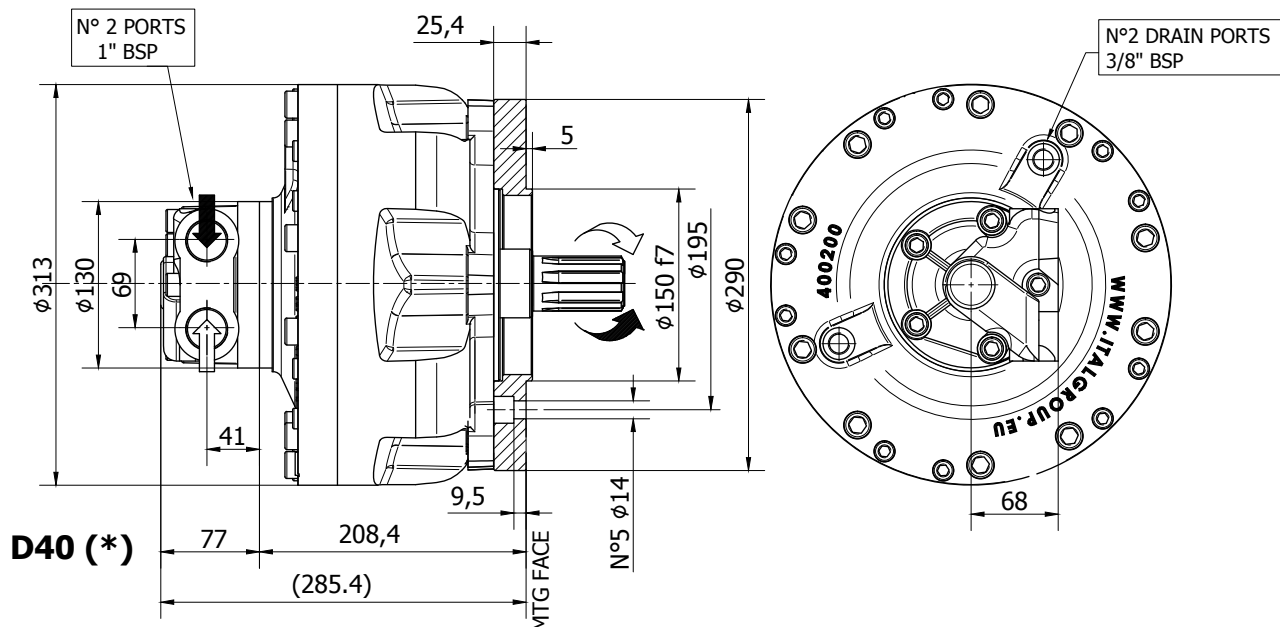

TECHNICAL DATA


		200	250	300	350	400	500	600	650
DISPLACEMENT	[cc]	193	251	305	348	424	493	566	624
SPECIFIC TORQUE	[Nm/bar]	3,06	4,00	4,84	5,52	6,76	7,84	9,00	9,92
MAX. CONT. PRESSURE	[bar]	250	250	250	250	250	250	250	250
HYDROSTATIC TEST PRESSURE	[bar]	420	420	420	420	420	420	420	420
MAX. CONT. SPEED	[rpm]	1200	950	800	650	600	520	480	440
PEAK SPEED (***)	[rpm]	1500	1150	950	800	800	700	650	620
MAX. CONT. POWER (****)	[kW]	75	75	75	75	75	75	75	75
MAX. CONT. POWER WITH FLUSHING	[kW]	105	105	105	105	105	105	105	105
MAX. CASE PRESSURE	[bar]	6	6	6	6	6	6	6	6
DRY WEIGHT	[kg]	53	53	53	53	53	53	53	53
TEMPERATURE RANGE (**)	[°C]	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70

- (*) The standard distributor (D40) is shown. Please refer to distributors section (pag. 82-83) for different distributor interfaces.
- (**) Please refer to the hydraulic fluid recommendations (pag. 8-9).
- (***) Do not exceed maximum continuous power with flushing (pag. 11).
- (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required. For more information please contact our technical department.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.


SHAFT CONFIGURATIONS

A0

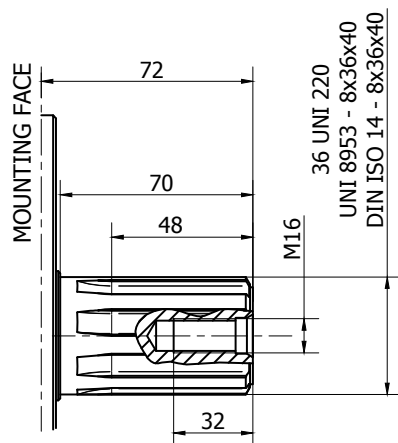


Available spline billet: **SB3**

A1

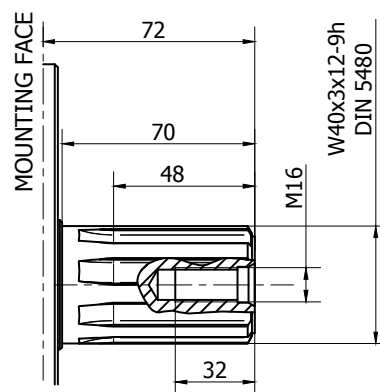


Available spline billet: **SB22**


A2

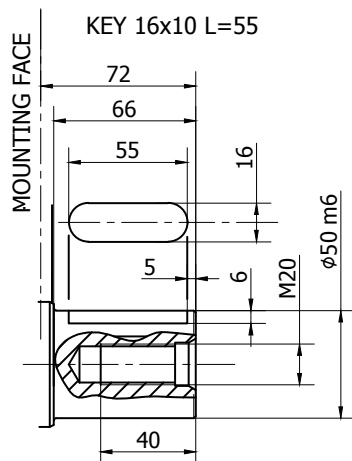

A3

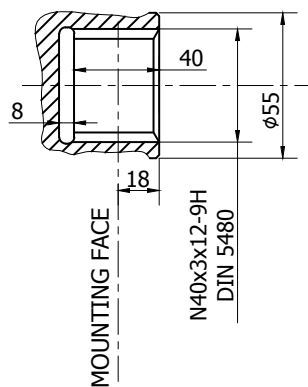


A31

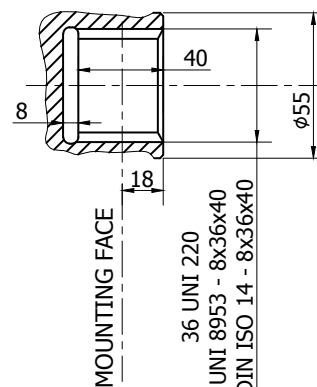


HC2- PERFORMANCE DIAGRAMS

200 cc

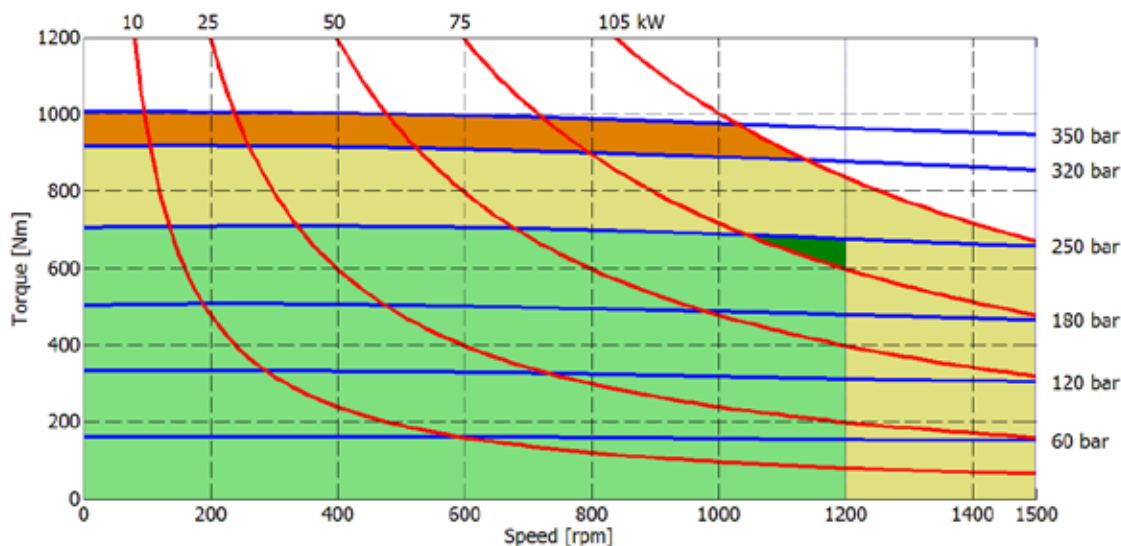

250 cc

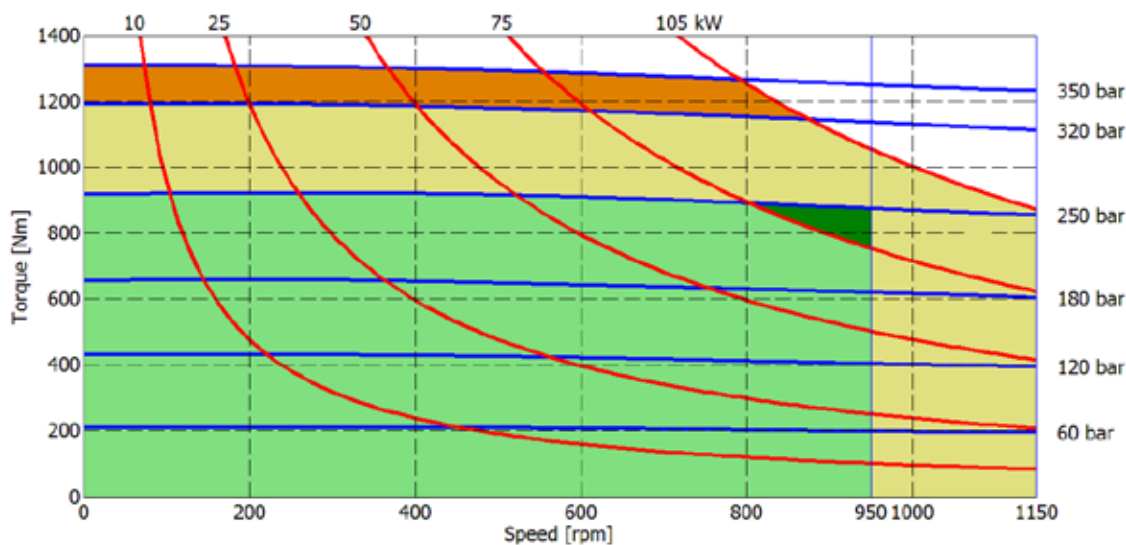


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroupp S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroupp S.r.l. is strictly forbidden.

HC2- PERFORMANCE DIAGRAMS

300 cc

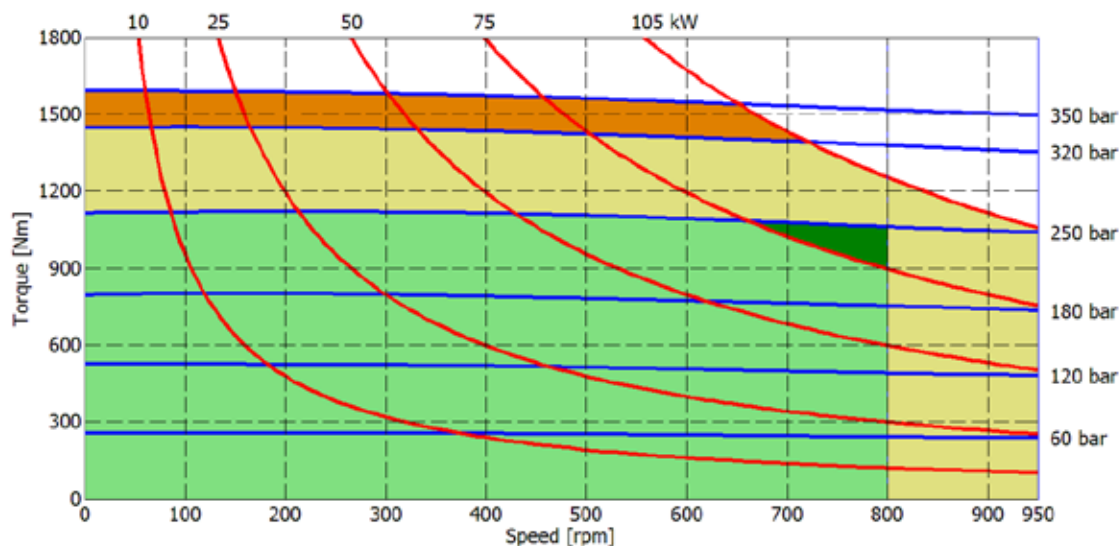

350 cc

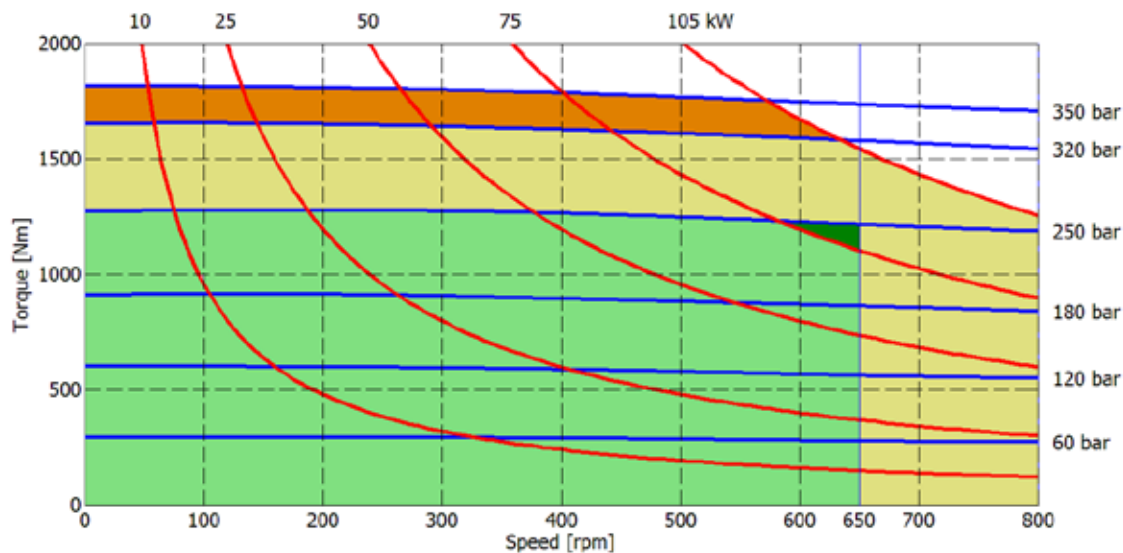


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

HC2- PERFORMANCE DIAGRAMS

400 cc

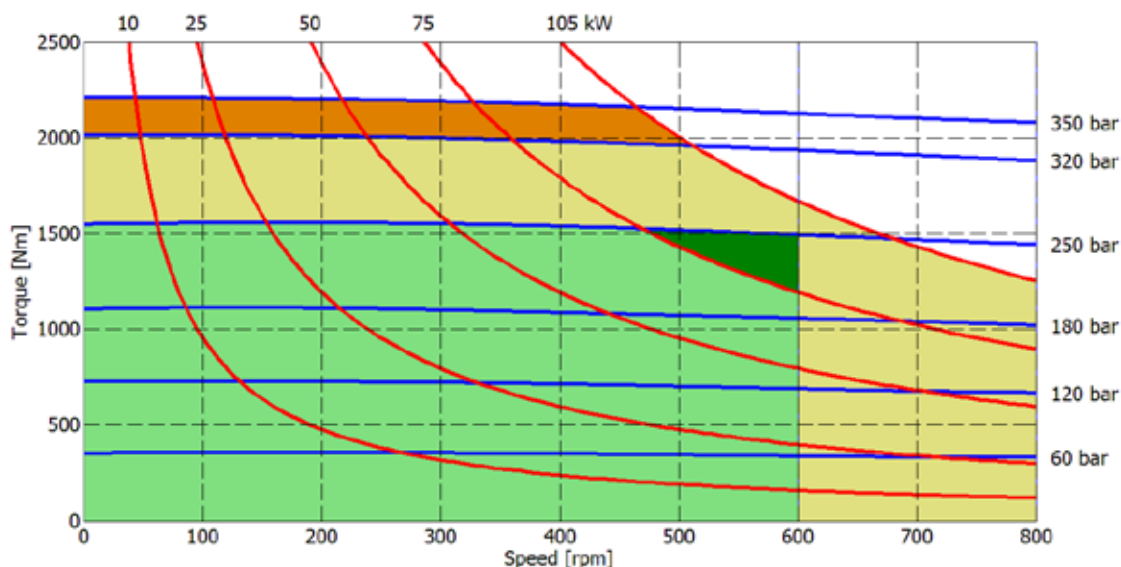

500 cc

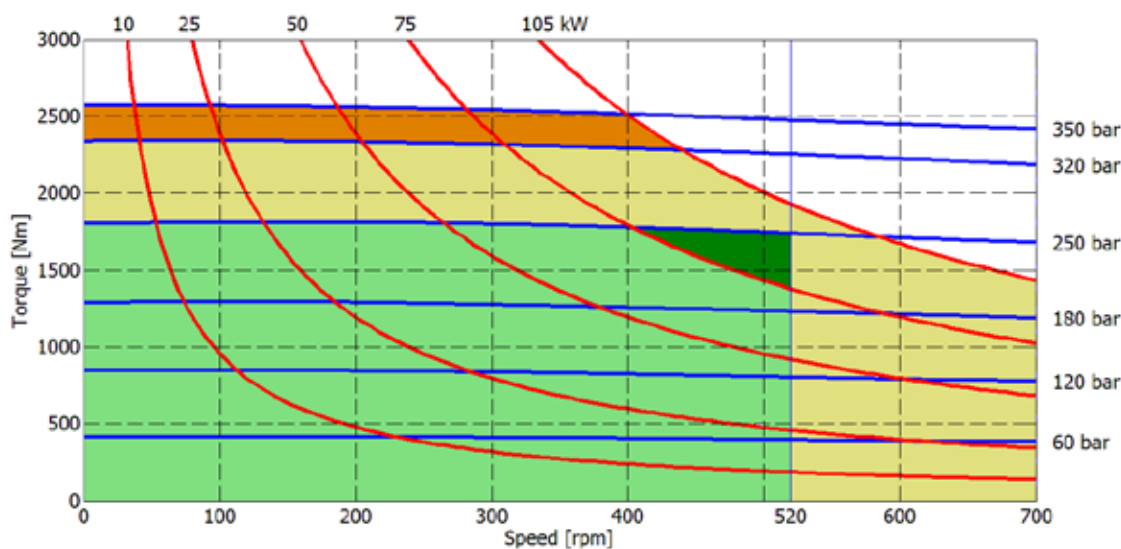


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

HC2- PERFORMANCE DIAGRAMS

600 cc

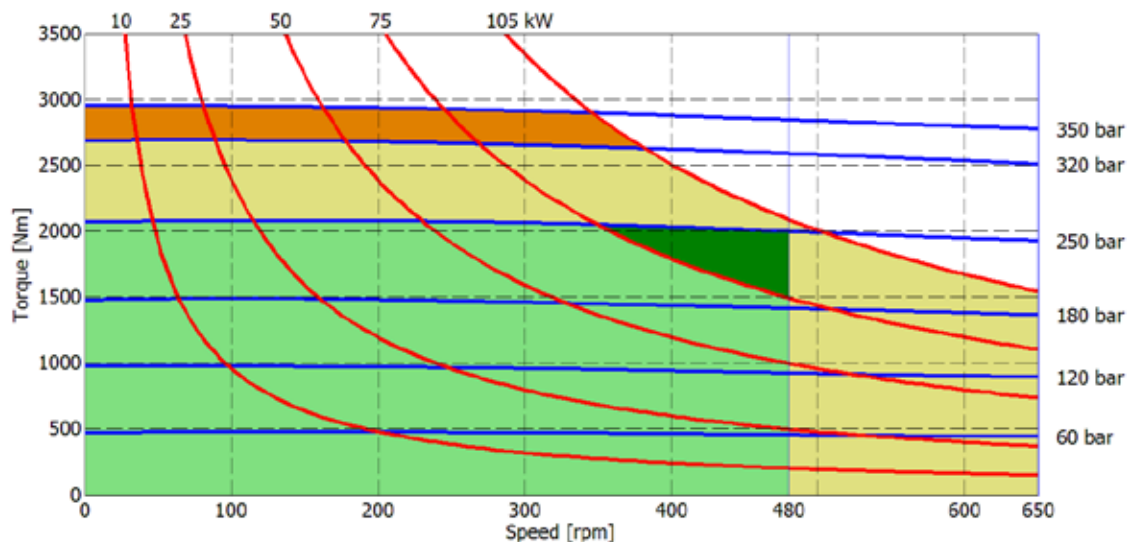

650 cc

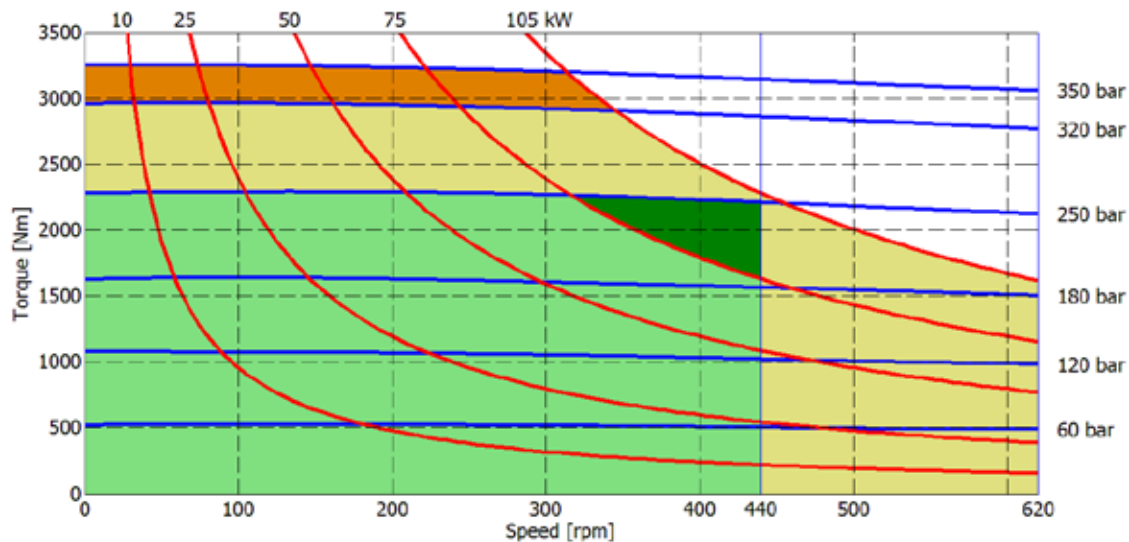


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

BEARING LIFE

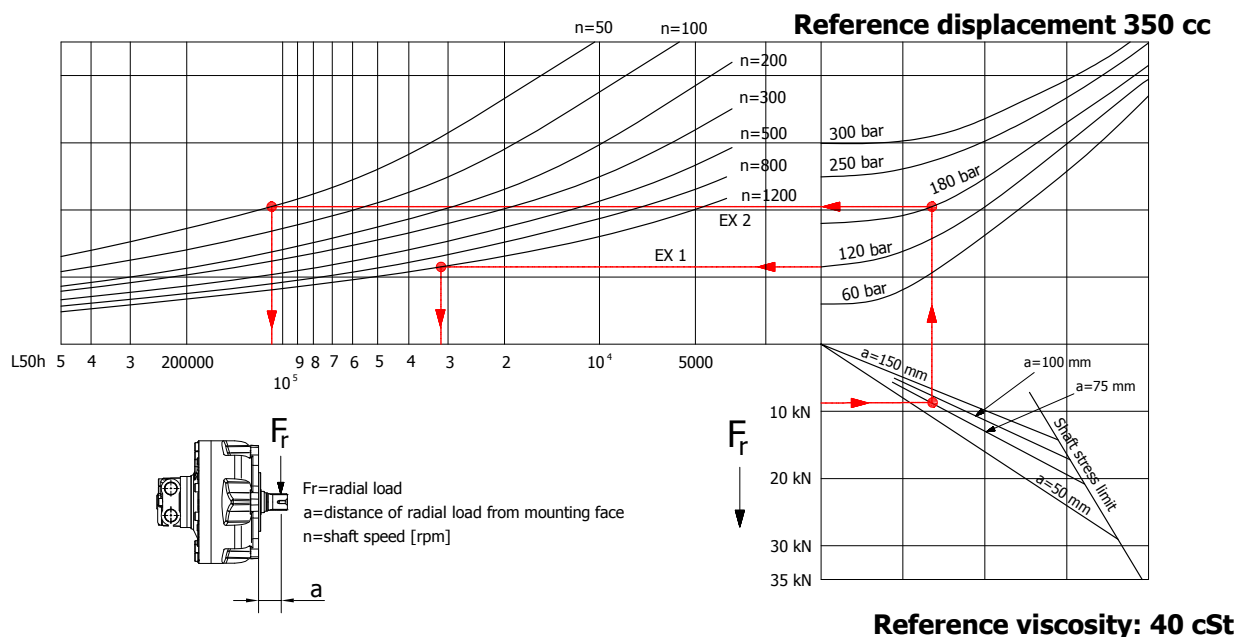

Example:

We suppose (EX1): $p=120$ [bar], $n=1200$ [rpm]; we obtain an average lifetime of 31000 [h].

If we suppose (EX2): $F_r=9$ [kN], $a=75$ [mm], $n=50$ [rpm] and $p=180$ [bar] we obtain an average lifetime of 105000 [h].

HC2- ORDERING CODE

HC	2	---	--	--	--	--	--	SB -
----	---	-----	----	----	----	----	----	------

DISPLACEMENT

200 250 300 350
400 500 600 650

INTERCHANGEABILITY

/C300
/S2

SPECIAL FEATURES

HSM
See pag. 7


MP

SPSL

HPS

CCW
See pag. 23

Z - -
Italgroup
internal code

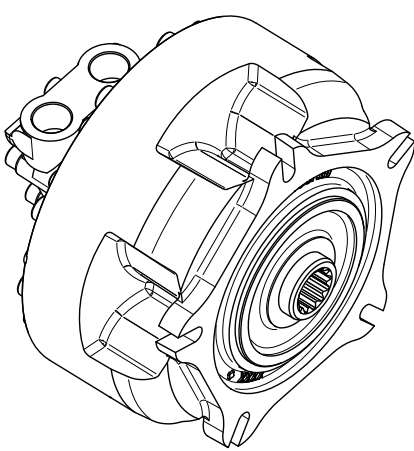

SHAFT

A0 A1
A2 A3
A31

TACHOMETER

J (*)

TA

TB

TT1

TQ1

EST

EST30

EST31
See pag. 90-93

(*) Tachometer predisposition

DISTRIBUTOR

D31B D36B
D310B D40
D47 D416
See pag. 88-89

SPLINE BILLET

SB3 SB15
SB22
See pag. 94


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

ITALGROUP SRL
HC SERIES - HC3
GENERAL CATALOGUE

INDEX - HC3

HC3 - INSTALLATION DRAWING	Pag	64 - 65
HC3/G2 - INSTALLATION DRAWING	"	66 - 67
HC3/G4 - INSTALLATION DRAWING	"	68 - 69
HC3 - PERFORMANCE DIAGRAMS	"	70 - 74
HC3 - ORDERING CODE	"	75

INSTALLATION DRAWING

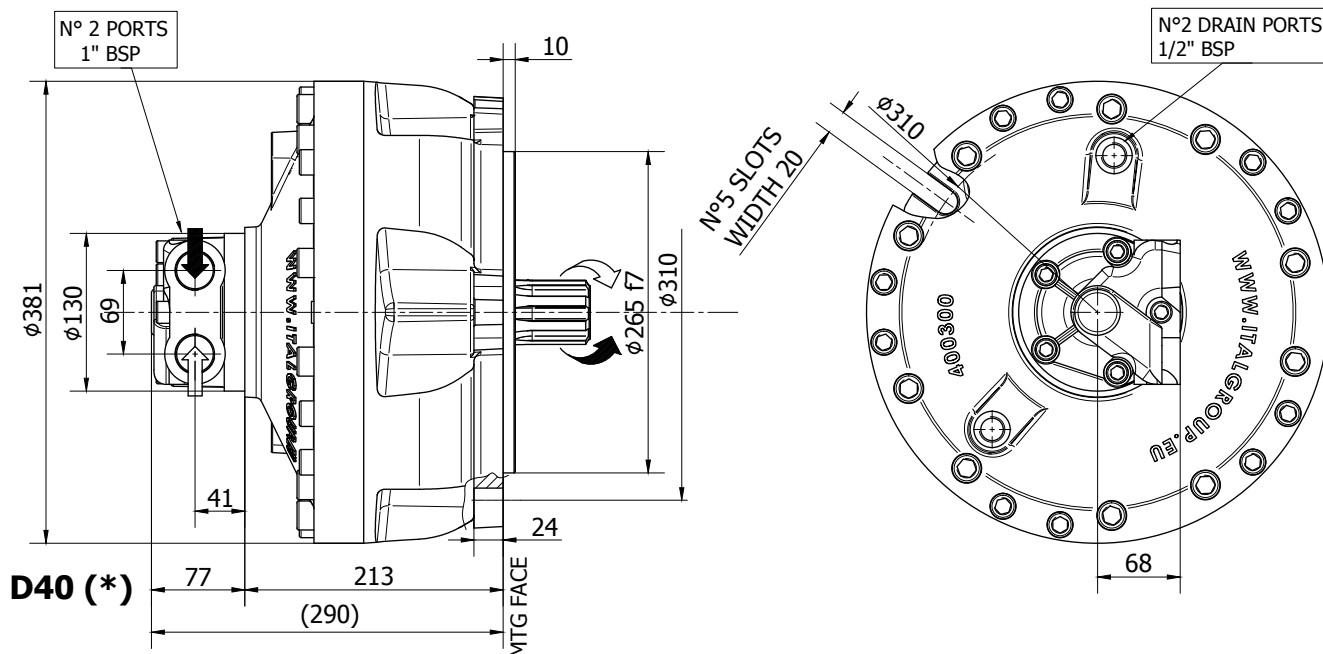

TECHNICAL DATA

		350	400	500	600	700	800	900	1000
DISPLACEMENT	[cc]	352	426	486	595	689	792	872	988
SPECIFIC TORQUE	[Nm/bar]	5,60	6,78	7,73	9,47	11	12,6	13,9	15,7
MAX. CONT. PRESSURE	[bar]	250	250	250	250	250	250	250	250
HYDROSTATIC TEST PRESSURE	[bar]	420	420	420	420	420	420	420	420
MAX. CONT. SPEED	[rpm]	640	600	500	450	420	400	360	310
PEAK SPEED (***)	[rpm]	800	800	700	600	600	550	525	500
MAX. CONT. POWER (****)	[kW]	82	85	85	85	85	85	85	85
MAX. CONT. POWER WITH FLUSHING	[kW]	130	130	130	130	130	130	130	130
MAX. CASE PRESSURE	[bar]	6	6	6	6	6	6	6	6
DRY WEIGHT	[kg]	92	92	92	92	92	92	92	92
TEMPERATURE RANGE (**)	[°C]	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70

- (*) The standard distributor (D40) is shown. Please refer to distributors section (pag. 82-83) for different distributor interfaces.

- (**) Please refer to the hydraulic fluid recommendations (pag. 8-9).


- (***) Do not exceed maximum continuous power with flushing (pag. 11).

- (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required. For more information please contact our technical department.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.


SHAFT CONFIGURATIONS

A0

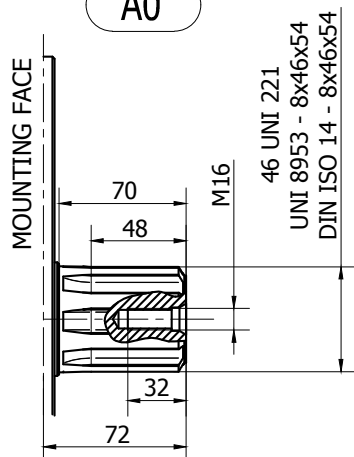


Available spline billet: **SB5**

A1

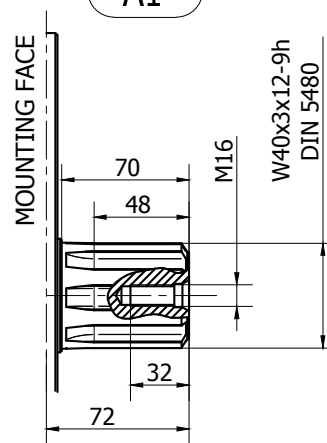


Available spline billet: **SB22**


A2

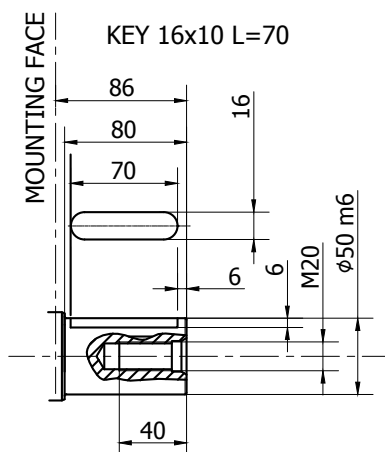


A3

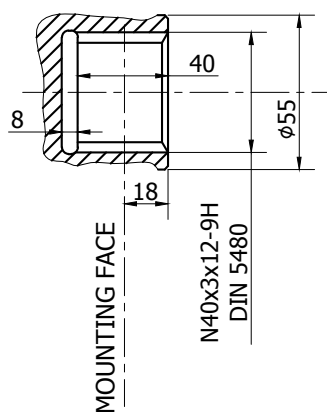

A31

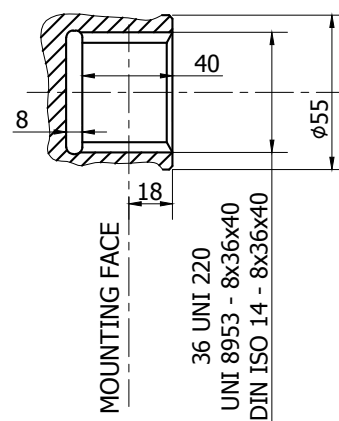

INSTALLATION DRAWING

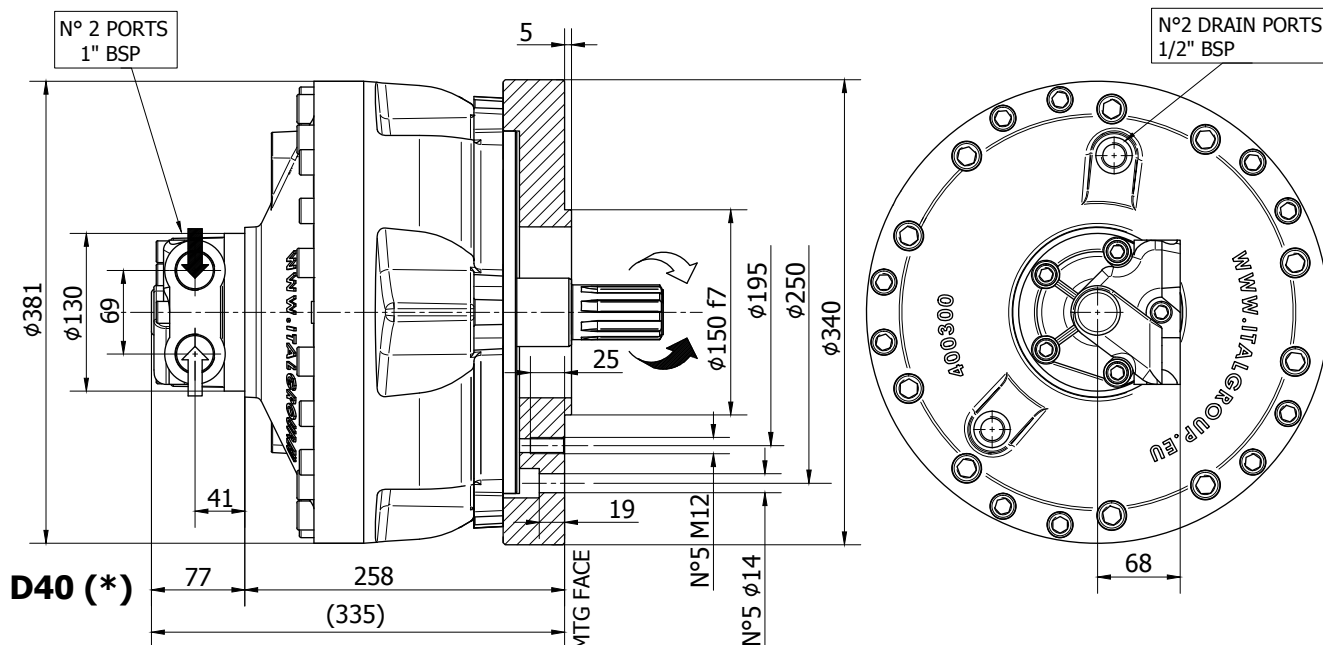

TECHNICAL DATA

		350	400	500	600	700	800	900	1000
DISPLACEMENT	[cc]	352	426	486	595	689	792	872	988
SPECIFIC TORQUE	[Nm/bar]	5,60	6,78	7,73	9,47	11	12,6	13,9	15,7
MAX. CONT. PRESSURE	[bar]	250	250	250	250	250	250	250	250
HYDROSTATIC TEST PRESSURE	[bar]	420	420	420	420	420	420	420	420
MAX. CONT. SPEED	[rpm]	640	600	500	450	420	400	360	310
PEAK SPEED (***)	[rpm]	800	800	700	600	600	550	525	500
MAX. CONT. POWER (****)	[kW]	85	85	85	85	85	85	85	85
MAX. CONT. POWER WITH FLUSHING	[kW]	130	130	130	130	130	130	130	130
MAX. CASE PRESSURE	[bar]	6	6	6	6	6	6	6	6
DRY WEIGHT	[kg]	92	92	92	92	92	92	92	92
TEMPERATURE RANGE (**)	[°C]	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70

- (*) The standard distributor (D40) is shown. Please refer to distributors section (pag. 82-83) for different distributor interfaces.

- (**) Please refer to the hydraulic fluid recommendations (pag. 8-9).

- (***) Do not exceed maximum continuous power with flushing (pag. 11).


- (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required.

For more information please contact our technical department.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou p S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou p S.r.l. is strictly forbidden.


SHAFT CONFIGURATIONS

A0

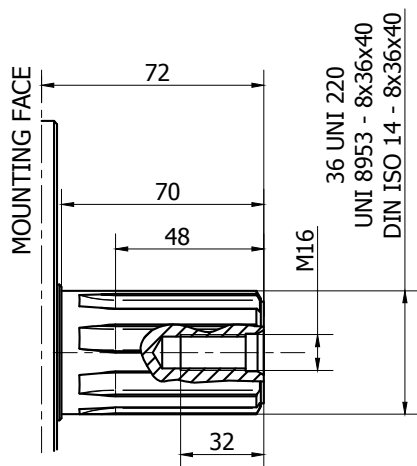


Available spline billet: **SB3**

A1

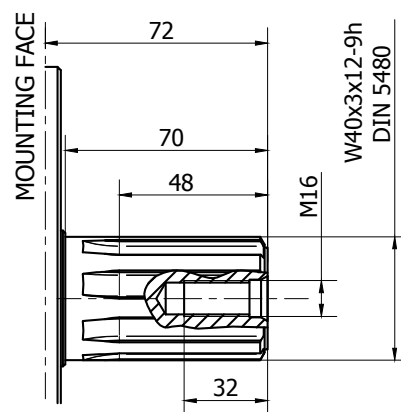


Available spline billet: **SB22**


A2

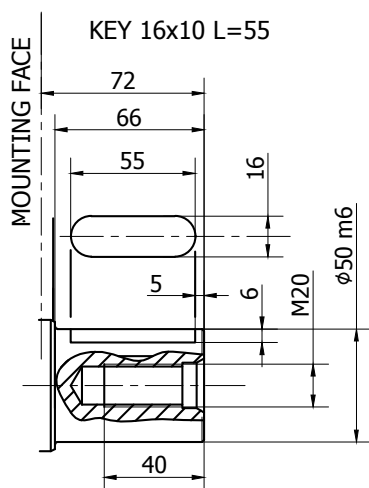


A3

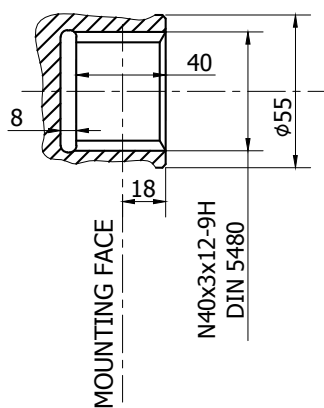

A31

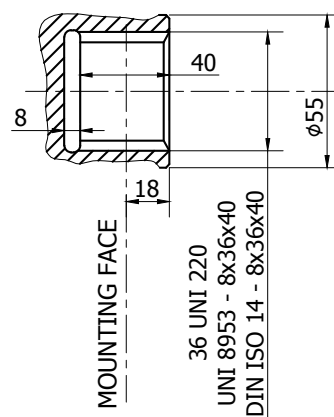

INSTALLATION DRAWING

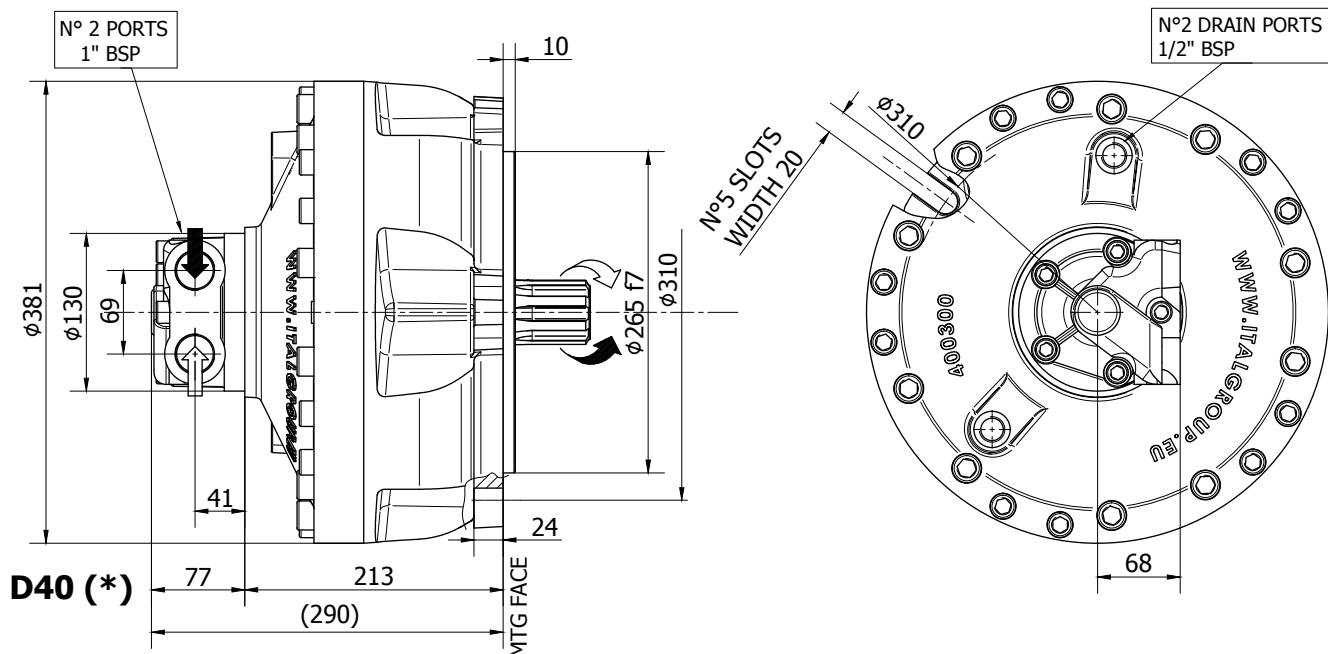

TECHNICAL DATA

		350	400	500	600	700	800	900	1000
DISPLACEMENT	[cc]	352	426	486	595	689	792	872	988
SPECIFIC TORQUE	[Nm/bar]	5,60	6,78	7,73	9,47	11	12,6	13,9	15,7
MAX. CONT. PRESSURE	[bar]	250	250	250	250	250	250	250	250
HYDROSTATIC TEST PRESSURE	[bar]	420	420	420	420	420	420	420	420
MAX. CONT. SPEED	[rpm]	640	600	500	450	420	400	360	310
PEAK SPEED (***)	[rpm]	800	800	700	600	600	550	525	500
MAX. CONT. POWER (****)	[kW]	85	85	85	85	85	85	85	85
MAX. CONT. POWER WITH FLUSHING	[kW]	130	130	130	130	130	130	130	130
MAX. CASE PRESSURE	[bar]	6	6	6	6	6	6	6	6
DRY WEIGHT	[kg]	92	92	92	92	92	92	92	92
TEMPERATURE RANGE (**)	[°C]	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70

- (*) The standard distributor (D40) is shown. Please refer to distributors section (pag. 82-83) for different distributor interfaces.

- (**) Please refer to the hydraulic fluid recommendations (pag. 8-9).


- (***) Do not exceed maximum continuous power with flushing (pag. 11).

- (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required.


For more information please contact our technical department.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou p S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou p S.r.l. is strictly forbidden.




SHAFT CONFIGURATIONS

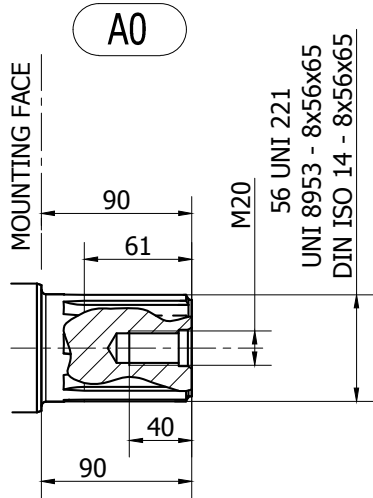

Available spline billet: (SB17)

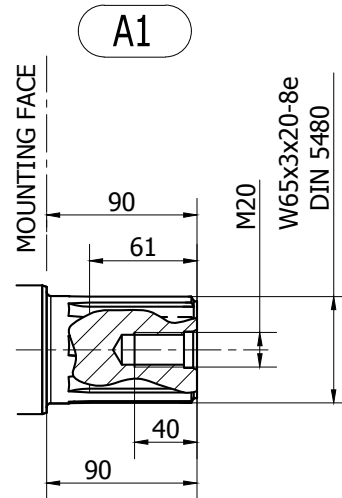


Available spline billet: (SB23)

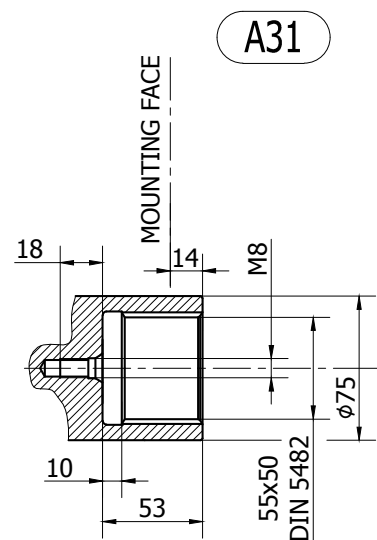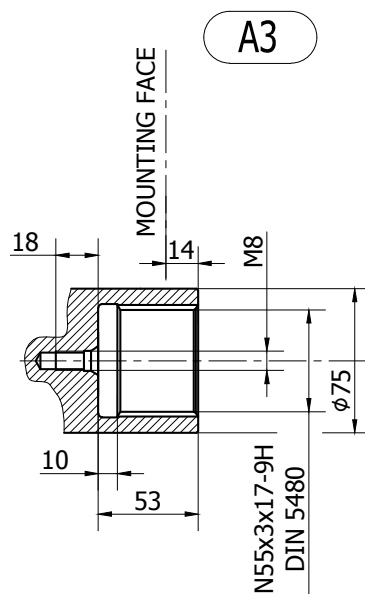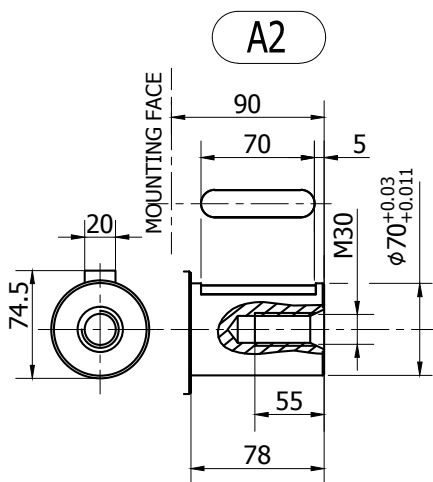


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

HC3- PERFORMANCE DIAGRAMS

350 cc

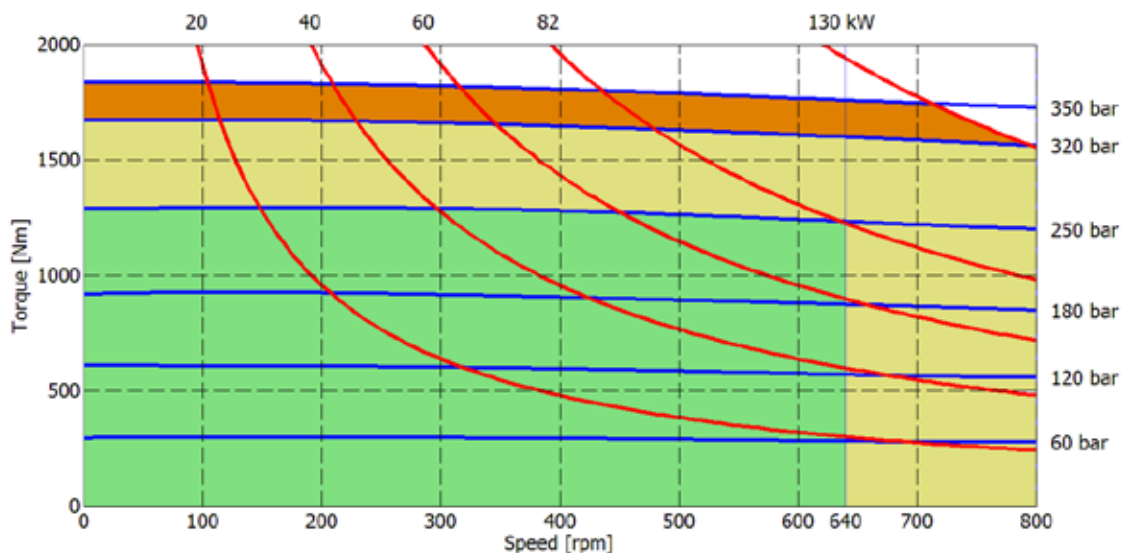

400 cc

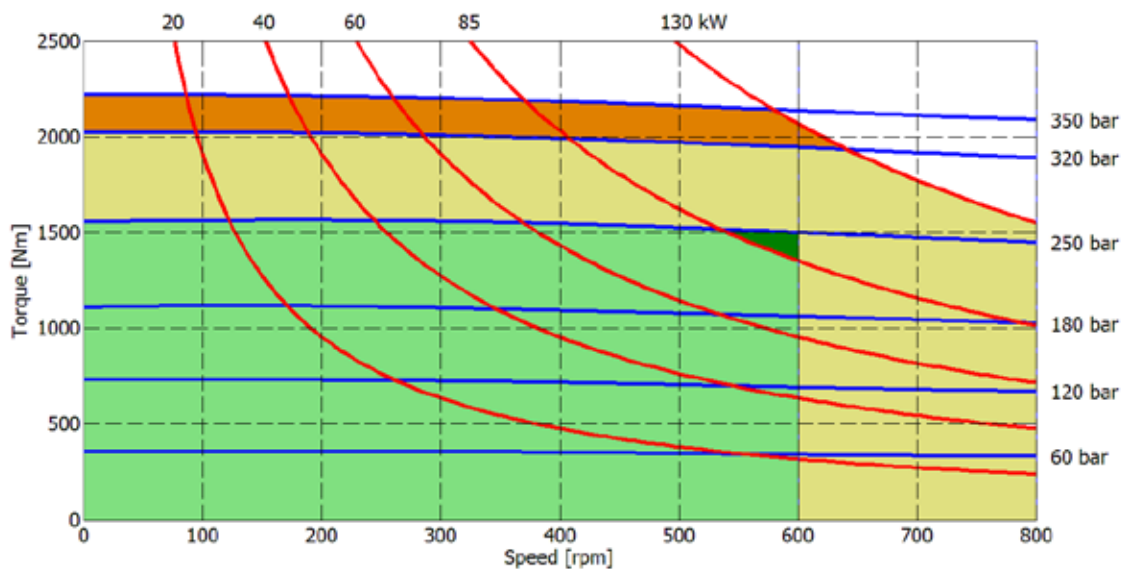


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

HC3- PERFORMANCE DIAGRAMS

500 cc

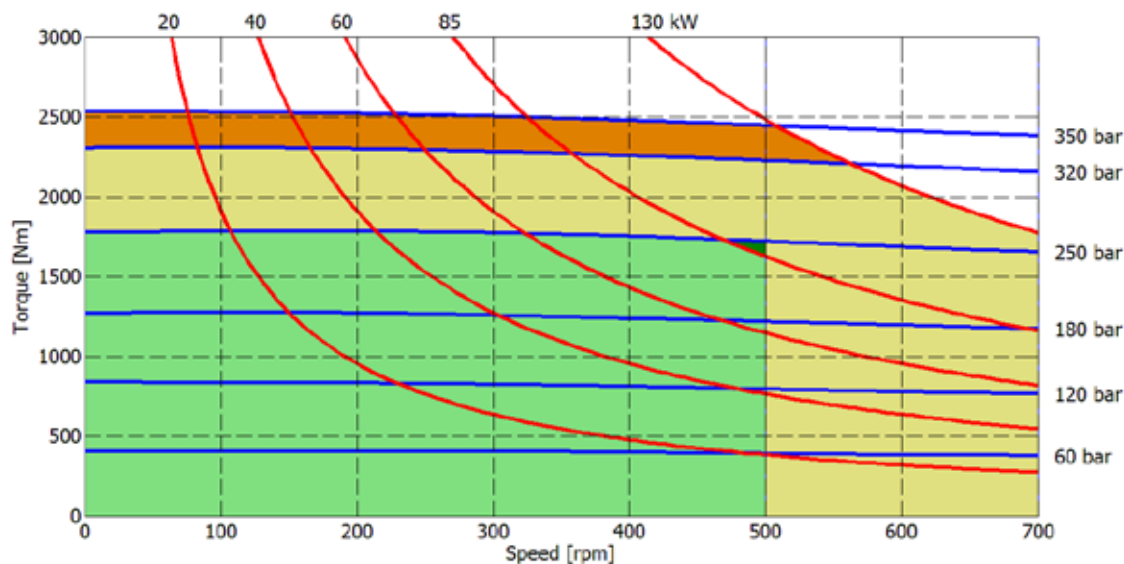

600 cc

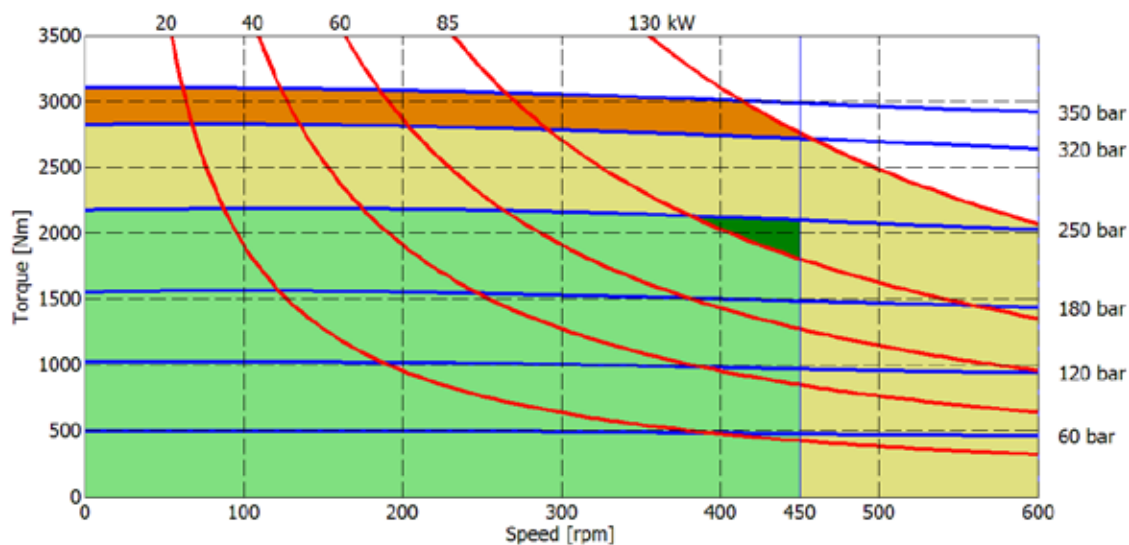


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

HC3- PERFORMANCE DIAGRAMS

700 cc

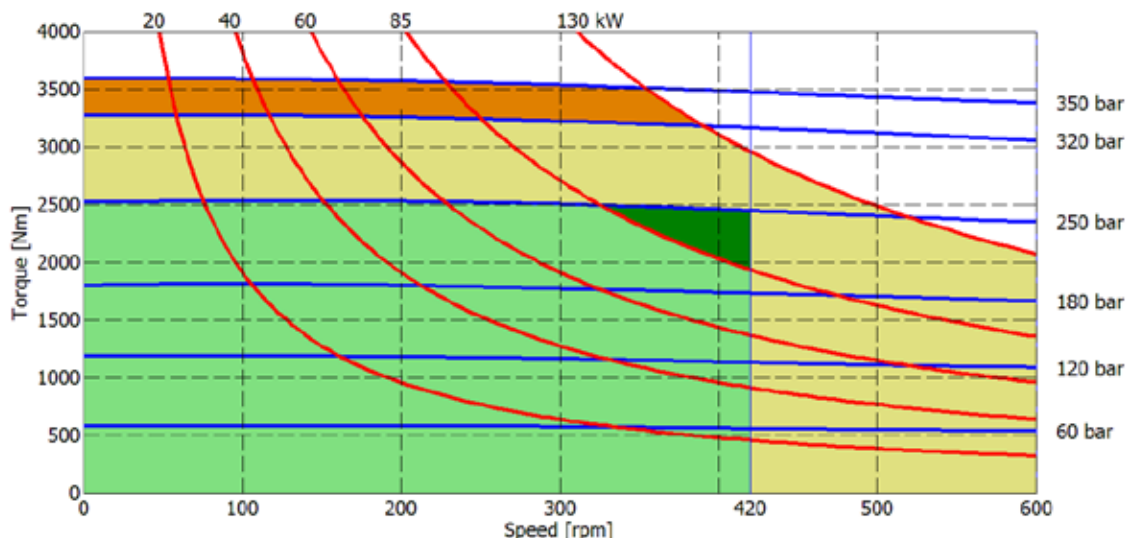

800 cc

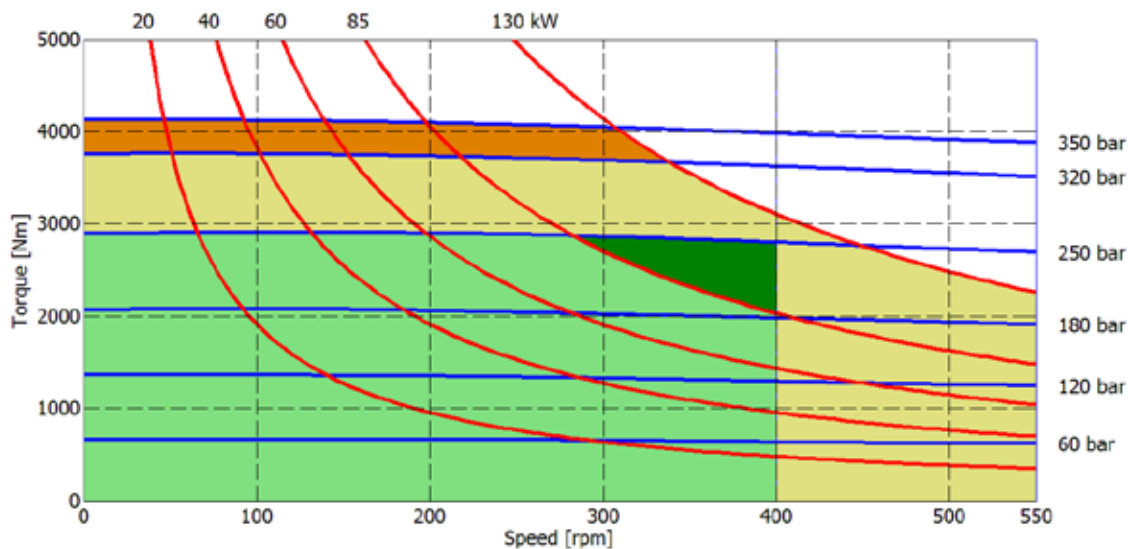


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.

HC3- PERFORMANCE DIAGRAMS

900 cc

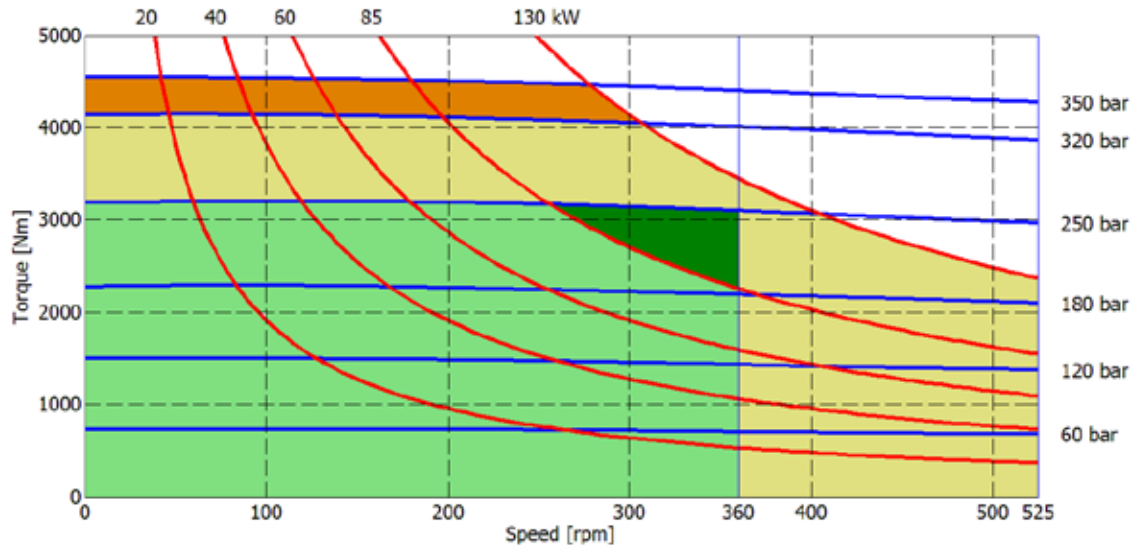

1000 cc

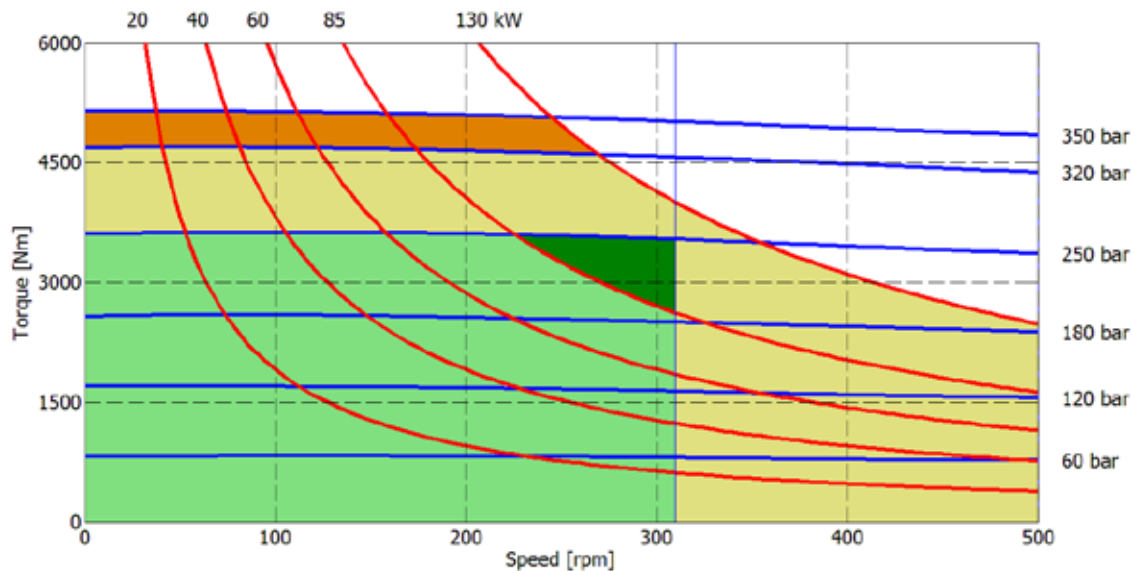


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

BEARING LIFE

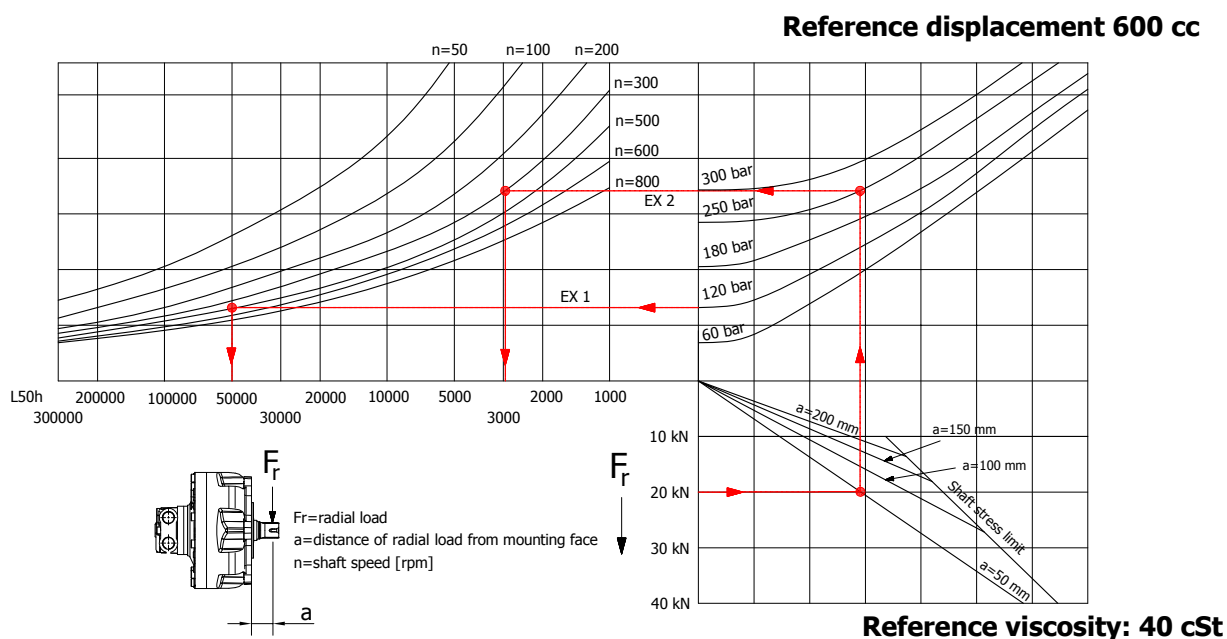

Example:

We suppose (EX1): $p=120$ [bar], $n=500$ [rpm]; we obtain an average lifetime of 50000 [h].

If we suppose (EX2): $F_r=20$ [kN], $a=50$ [mm], $n=300$ [rpm] and $p=250$ [bar] we obtain an average lifetime of 2900 [h].

HC3- ORDERING CODE

HC	3	---	--	--	--	--	--	SB -
----	---	-----	----	----	----	----	----	------

DISPLACEMENT


350 400 500 600
700 800 900 1000

INTERCHANGEABILITY

/G2
/G4

SHAFT

A0 A1
A2 A3
A31

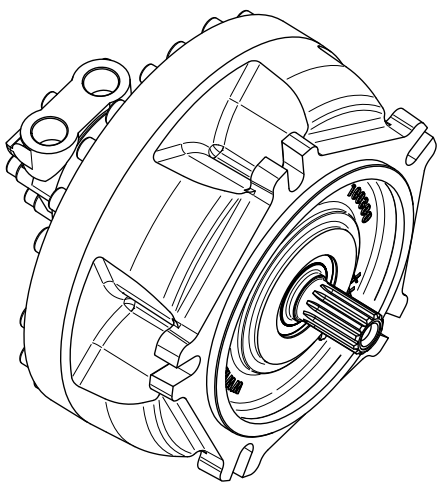

TACHOMETER

J (*)
TA
TB
TT1
TQ1
EST
EST30
EST31

See pag. 90-93

(*) Tachometer predisposition

SPECIAL FEATURES

HSM
See pag. 9

MP
SPSL
HPS
CCW
See pag. 25

Z - -
Italgroup
internal code

DISTRIBUTOR

D31B D36B
D310B D40
D47 D416
D90

See pag. 88-89

SPLINE BILLET

SB3 SB5
SB17 SB22
SB23

See pag. 94


ITALGROUP SRL
HC SERIES - HC5

GENERAL CATALOGUE

INDEX - HC5

<u>HC5 - INSTALLATION DRAWING</u>	Pag	78 - 79
<u>HC5 / G4 - INSTALLATION DRAWING</u>	"	80 - 81
<u>HC5 - PERFORMANCE DIAGRAMS</u>	"	82 - 86
<u>ORDERING CODE</u>	"	87

INSTALLATION DRAWING

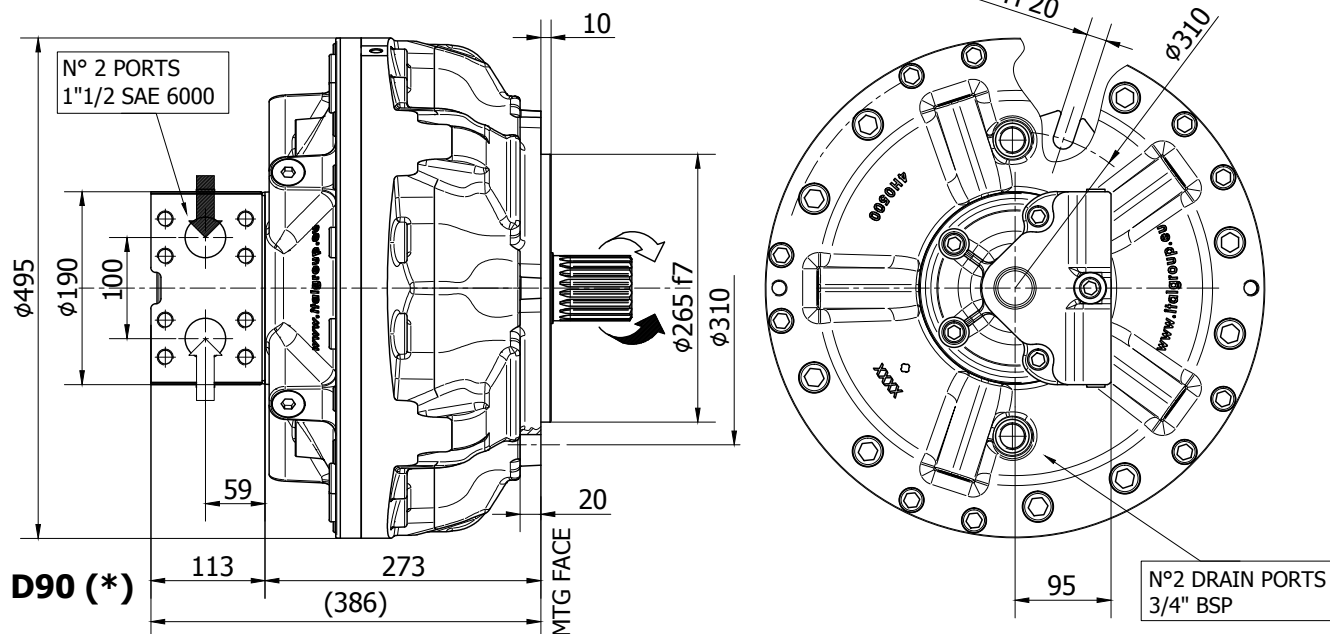


TECHNICAL DATA

		800	1000	1200	1300	1500	1600	1800	2000
DISPLACEMENT	[cc]	837	1060	1200	1308	1462	1625	1816	2010
SPECIFIC TORQUE	[Nm/bar]	13,3	16,9	19,1	20,8	23,3	25,9	28,3	31,3
MAX. CONT. PRESSURE	[bar]	250	250	250	250	250	250	250	250
HYDROSTATIC TEST PRESSURE	[bar]	420	420	420	420	420	420	420	420
MAX. CONT. SPEED	[rpm]	350	320	320	320	300	280	280	220
PEAK SPEED (***)	[rpm]	470	470	430	430	380	350	350	280
MAX. CONT. POWER (****)	[kW]	100	100	100	100	100	100	100	100
MAX. CONT. POWER WITH FLUSHING	[kW]	150	150	150	150	150	150	150	150
MAX. CASE PRESSURE	[bar]	6	6	6	6	6	6	6	6
DRY WEIGHT	[kg]	190	190	190	190	190	190	190	190
TEMPERATURE RANGE (**)	[°C]	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70


- (*) The standard distributor (D90) is shown. Please refer to distributors section (pag. 82-83) for different distributor interfaces.
- (**) Please refer to the hydraulic fluid recommendations (pag. 8-9).
- (***) Do not exceed maximum continuous power with flushing (pag. 11).
- (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required. For more information please contact our technical department.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.




SHAFT CONFIGURATIONS

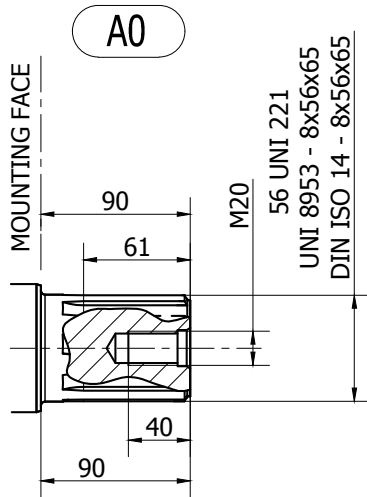

Available spline billet: (SB17)

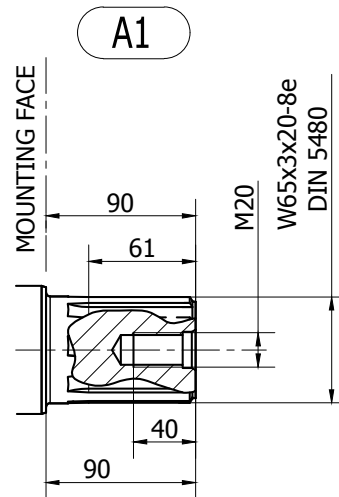


Available spline billet: (SB23)

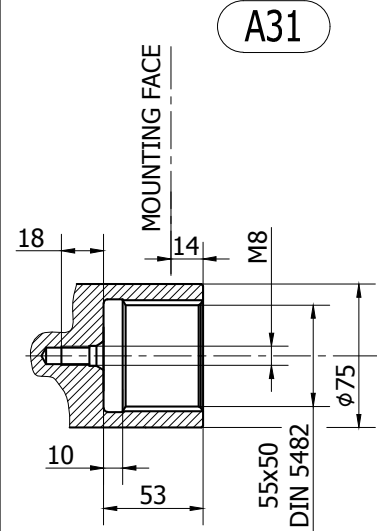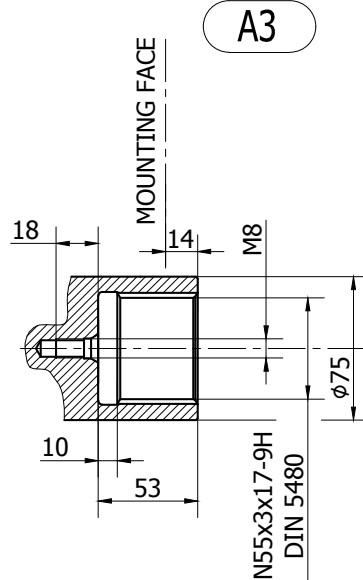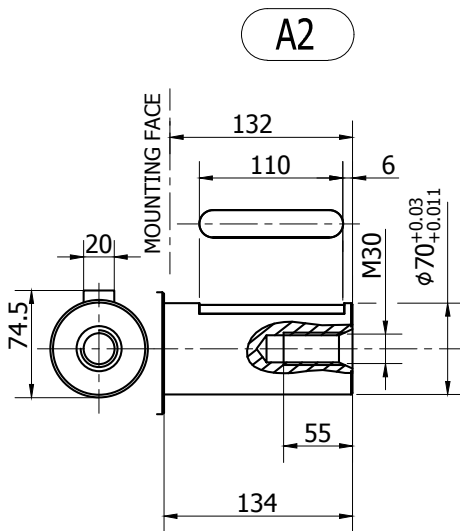

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

INSTALLATION DRAWING

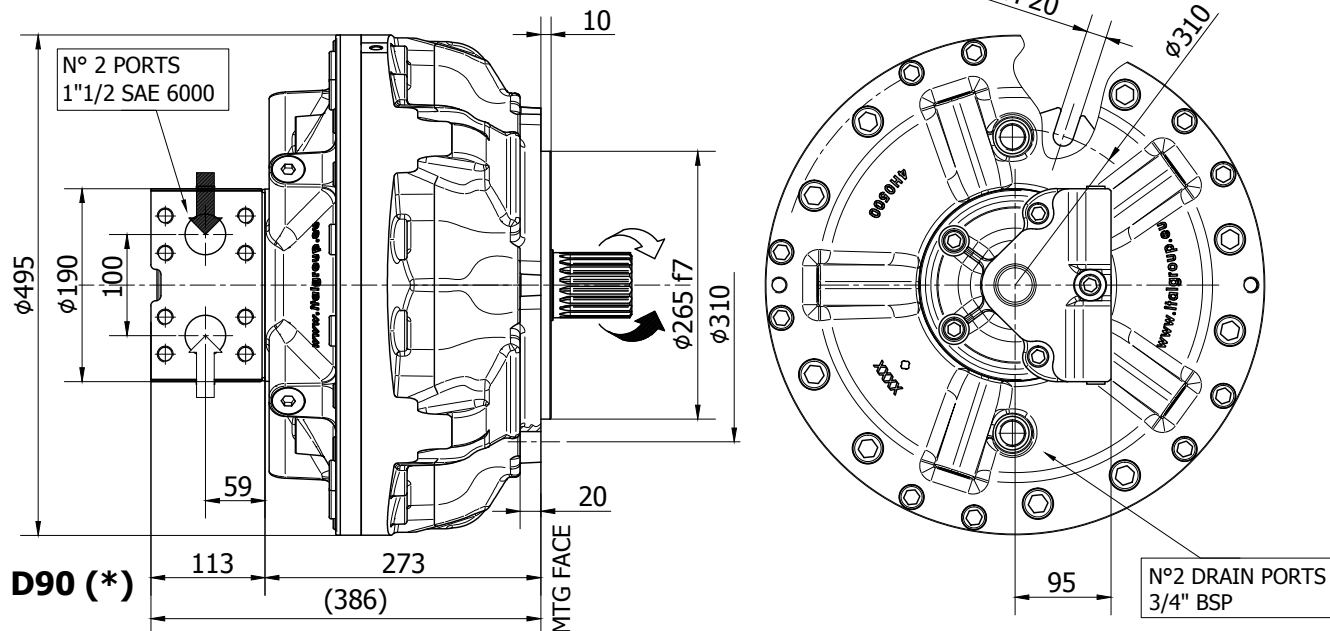


TECHNICAL DATA

[illegible]


- (*) The standard distributor (D90) is shown. Please refer to distributors section (pag. 82-83) for different distributors interfaces.
 - (**) Please refer to the hydraulic fluid recommendations (pag. 8-9).
 - (***) Do not exceed maximum continuous power with flushing (pag. 11).
 - (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required.
- For more information please contact our technical department.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.




SHAFT CONFIGURATIONS

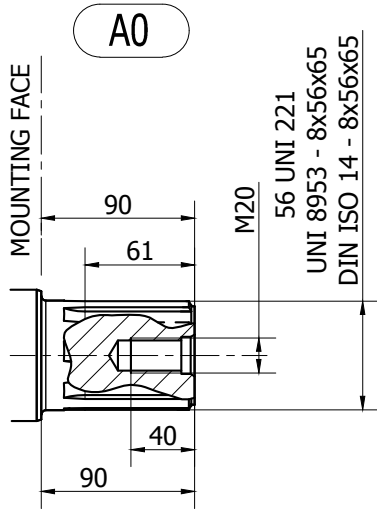

Available spline billet: (SB17)

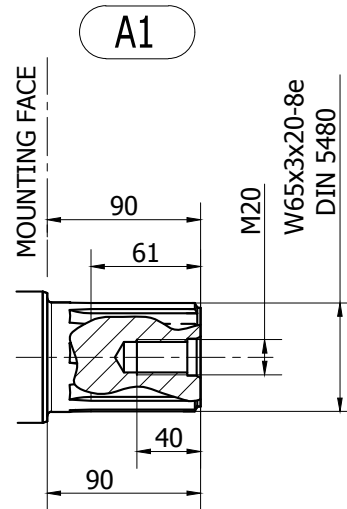


Available spline billet: (SB23)

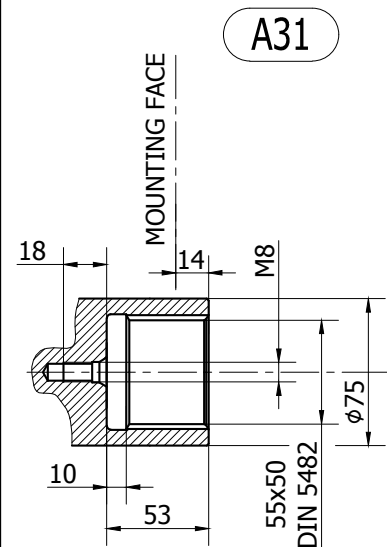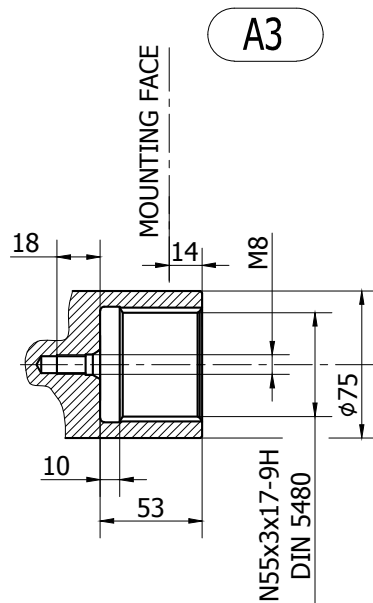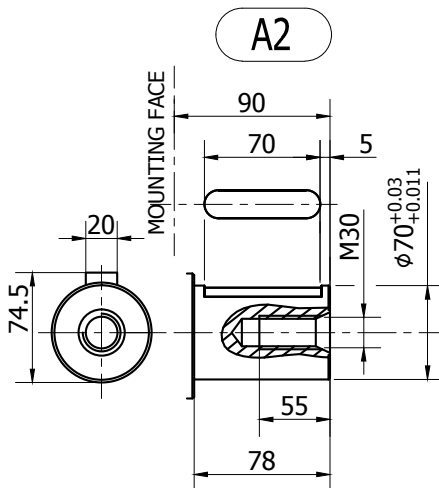


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

HC5 - PERFORMANCE DIAGRAMS

800 cc

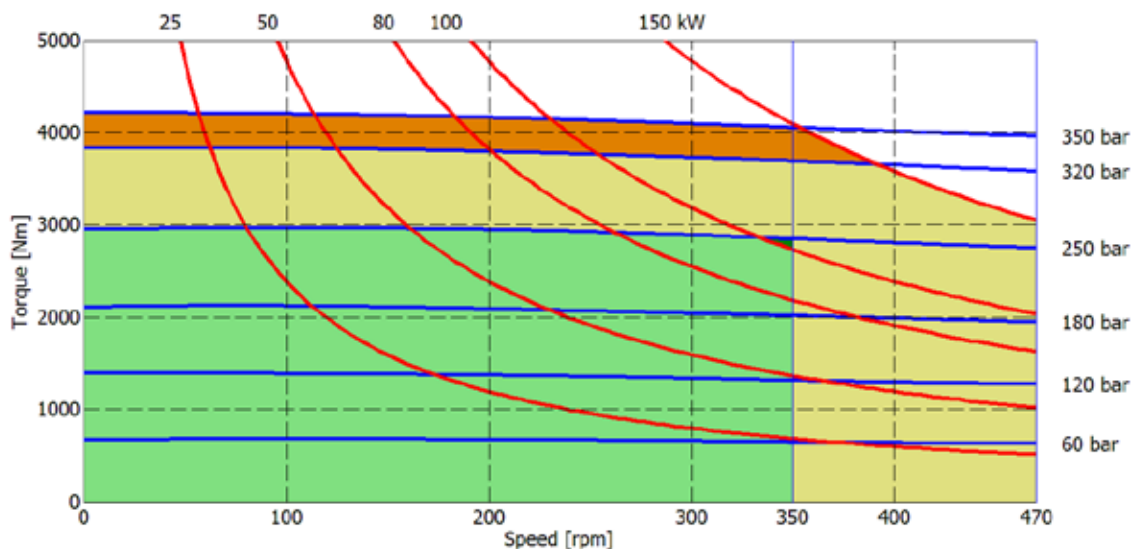

1000 cc

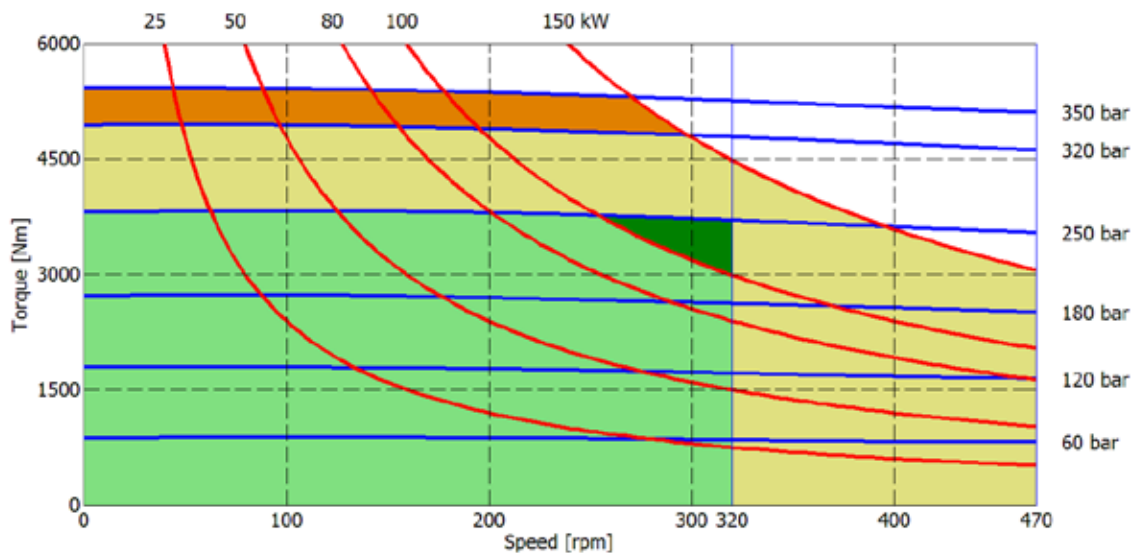


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.

HC5 - PERFORMANCE DIAGRAMS

1200 cc

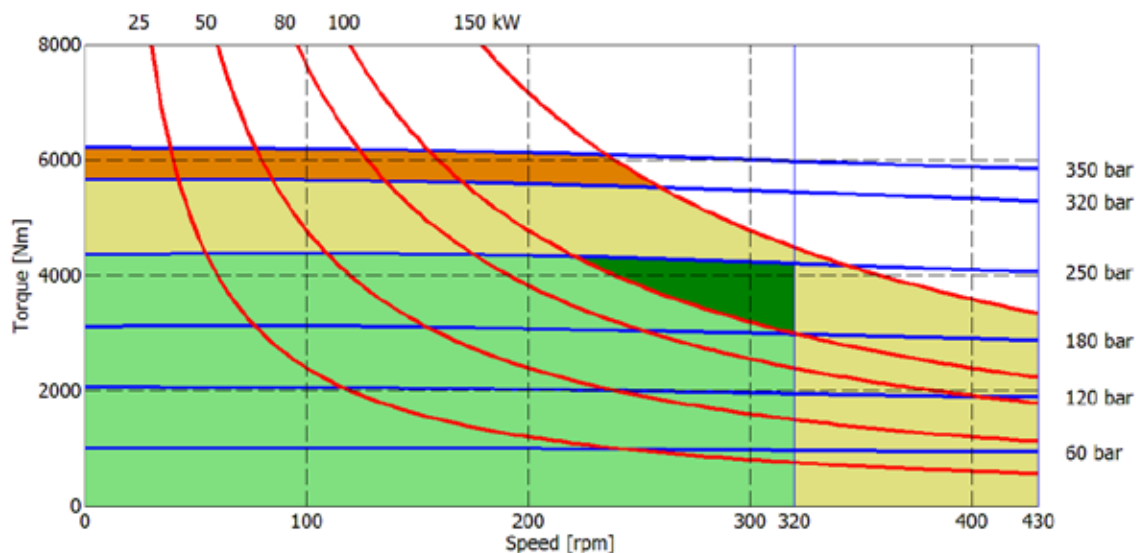

1300 cc

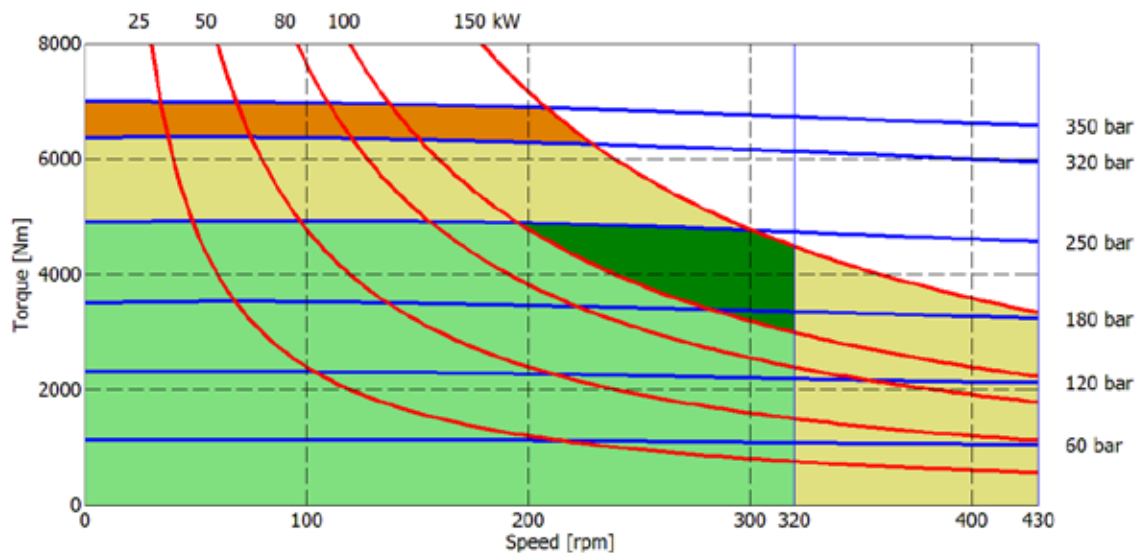


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

HC5- PERFORMANCE DIAGRAMS

1500 cc

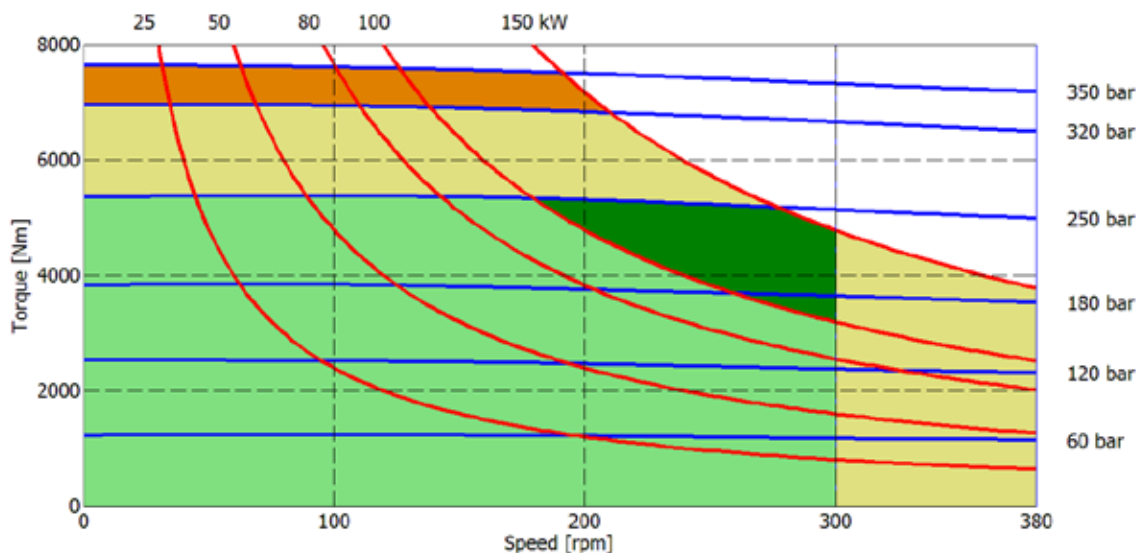

1600 cc

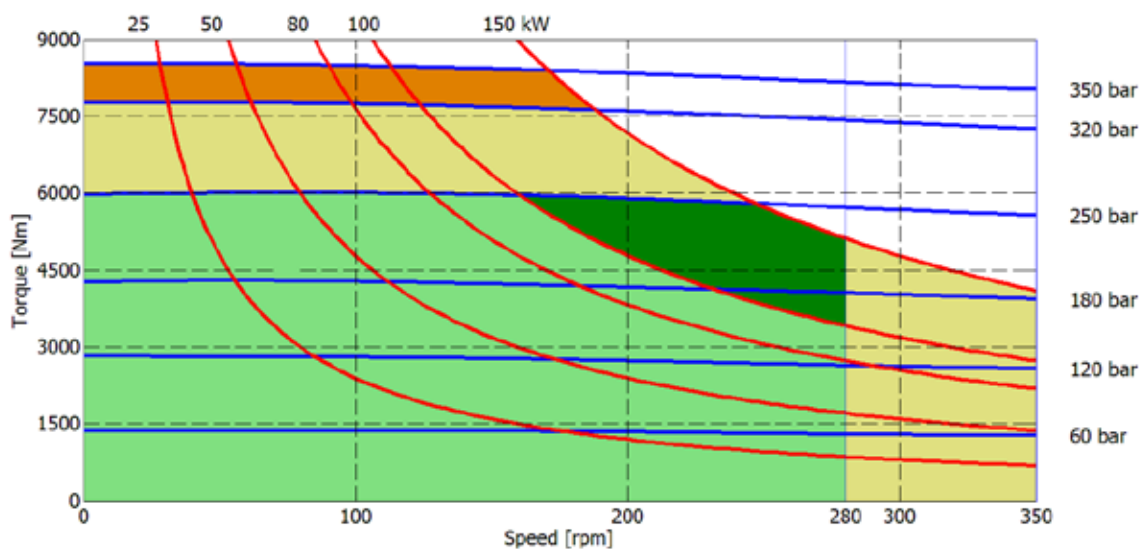


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.

HC5 - PERFORMANCE DIAGRAMS

1800 cc

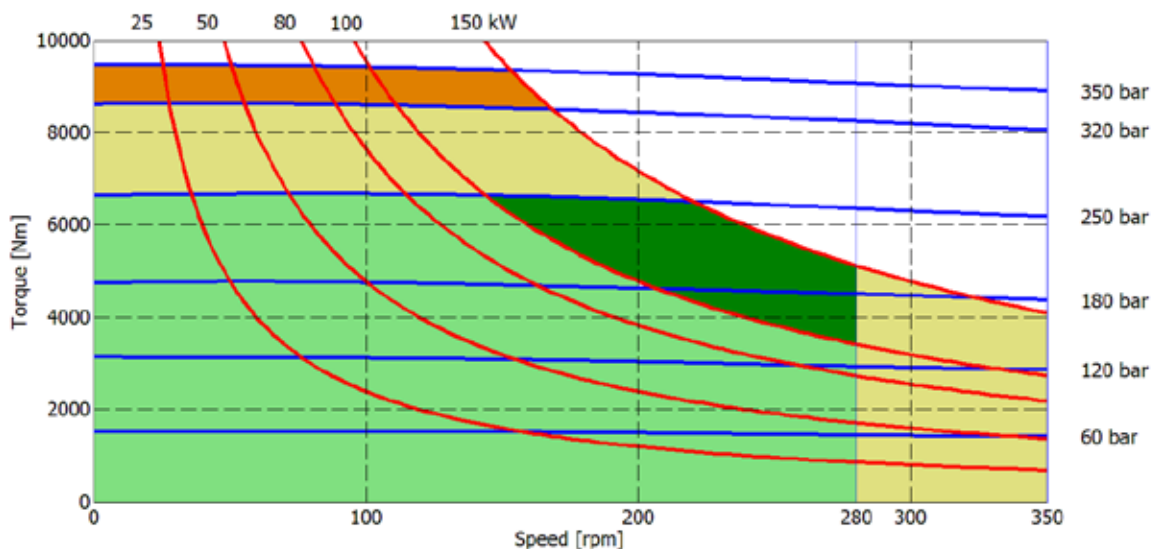

2000 cc

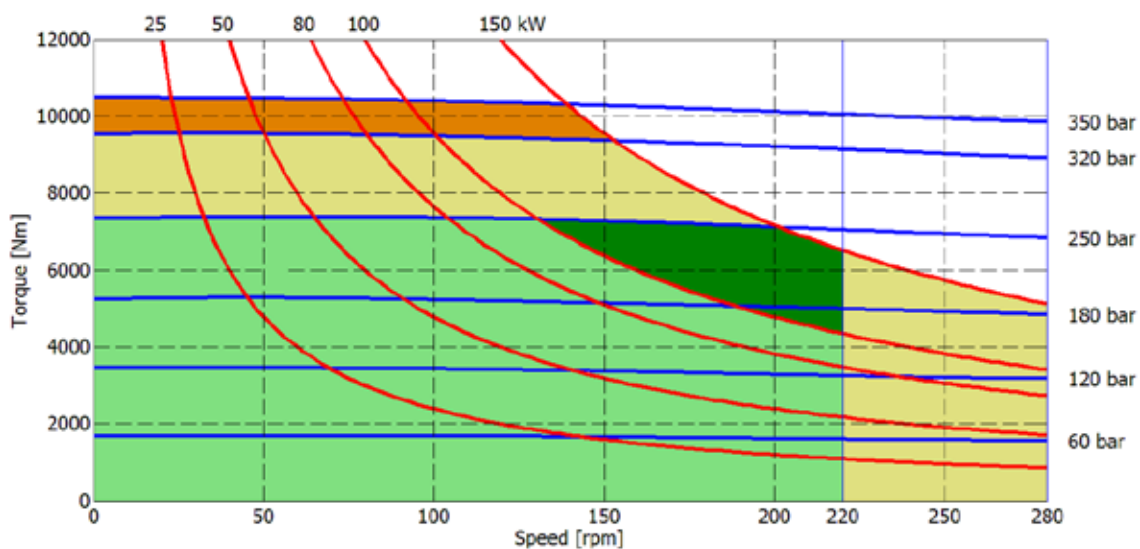


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

BEARING LIFE

Reference displacement 1300 cc

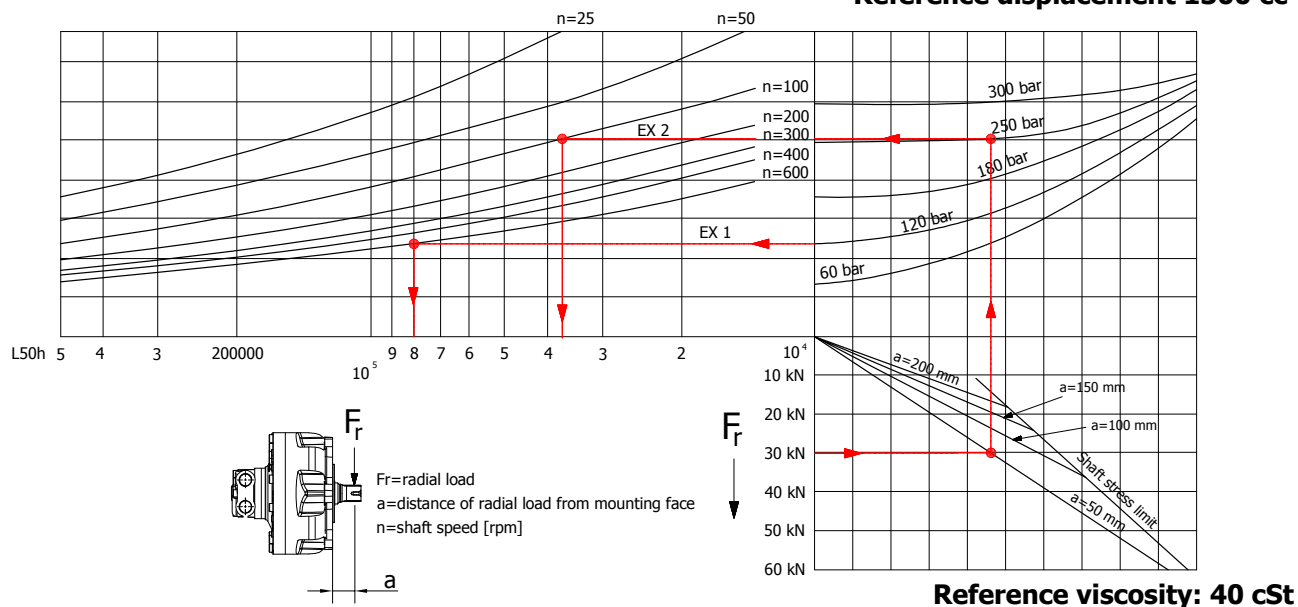

Example:

We suppose (EX1): $p=120$ [bar], $n=600$ [rpm]; we obtain an average lifetime of 80000 [h].

If we suppose (EX2): $F_r=30$ [kN], $a=50$ [mm], $n=100$ [rpm] and $p=250$ [bar] we obtain an average lifetime of 38000 [h].

HC5 - ORDERING CODE


HC	5	---	--	--	--	--	--	SB -
----	---	-----	----	----	----	----	----	------

DISPLACEMENT

(800) (1000) (1200) (1300)
(1500) (1600) (1800) (2000)

INTERCHANGEABILITY

(/G4)

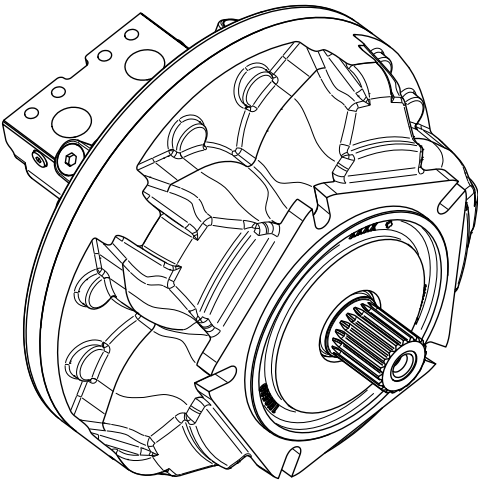

SHAFT

(A0) (A1)
(A2) (A3)
(A31)

DISTRIBUTOR

(D31B) (D36B)
(D310B) (D40)
(D47) (D416)
(D90)

See pag. 88-89

TACHOMETER

(J) (*)
(TA)
(TB)
(TT1)
(TQ1)
(EST)
(EST30)
(EST31)

See pag. 90-93

(*) Tachometer predisposition

SPECIAL FEATURES

(HSM)
See pag. 9

(MP)
(SPSL)
(HPS)
(CCW)
See pag. 25


(Z - -)
Italgroup
internal code

**SPLINE
BILLET**


(SB17) (SB23)
See pag. 94

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

D40-D416-D31B-D310B-D36B-D316B

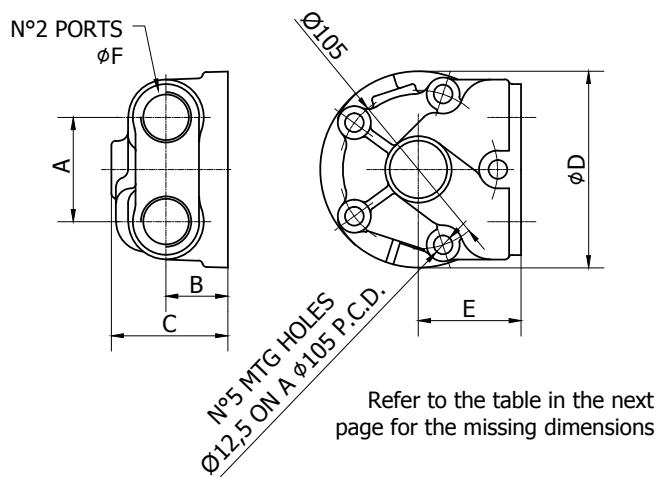

D47-D90

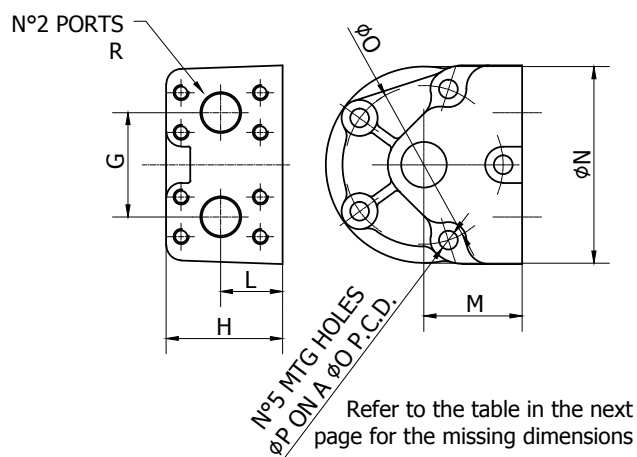

MOTOR DISTRIBUTORS

		D40	D416	D31B	D310B	D36B	D316B	D47	D90
A	[mm]	69	69	56	56	56	56		
B	[mm]	41	41	39	39	39	39		
C	[mm]	77	77	67	67	67	67		
D	[mm]	130	130	125	125	125	125		
E	[mm]	68	68	65	65	65	65		
F	[]	1" BSP	1" SAE	3/4" BSP	1" BSP	3/4" SAE	1" SAE		
G	[mm]							69	100
H	[mm]							77	113
L	[mm]							41	59
M	[mm]							65	95
N	[mm]							130	190
O	[mm]							105	149
P	[mm]							12,5	14,5
R	[]							1" SAE 3000	1"1/2 SAE 6000

		D31B	D310B	D36B	D316B	D40	D416	D47	D90
MAX. CONT. FLOW	[l/min]	200	300	200	300	300	300	300	700
MAX. FLOW	[l/min]	400	400	400	400	400	400	400	1200
MAX. CONT. PRESSURE	[bar]	300	300	300	300	300	300	300	300
PEAK PRESSURE	[bar]	500	500	500	500	500	500	500	500

HC05	●	●	●	●	●	●	●	●	
HC1	●	●	●	●	●	●	●	●	
HC2	●	●	●	●	●	●	●	●	
HC3	●	●	●	●	●	●	●	●	●
HC5	●	●	●	●	●	●	●	●	●




Standard version




Special version: available on request. Please contact Italgrou for more details

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.


TA

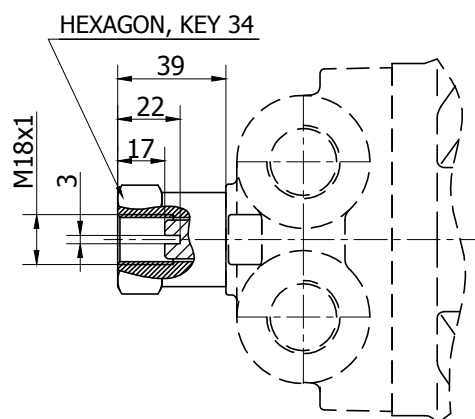


TB

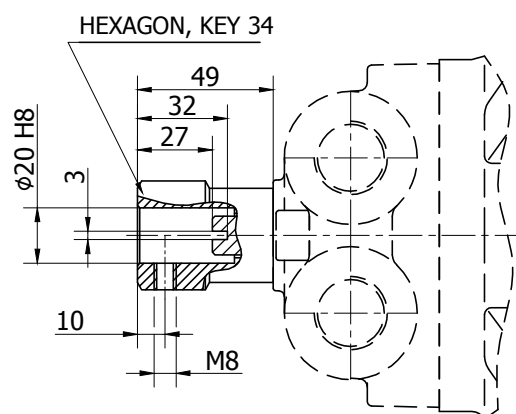


TT1

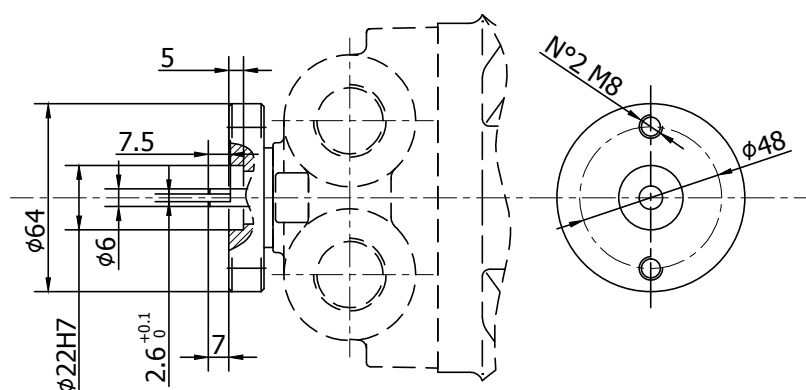


TQ1

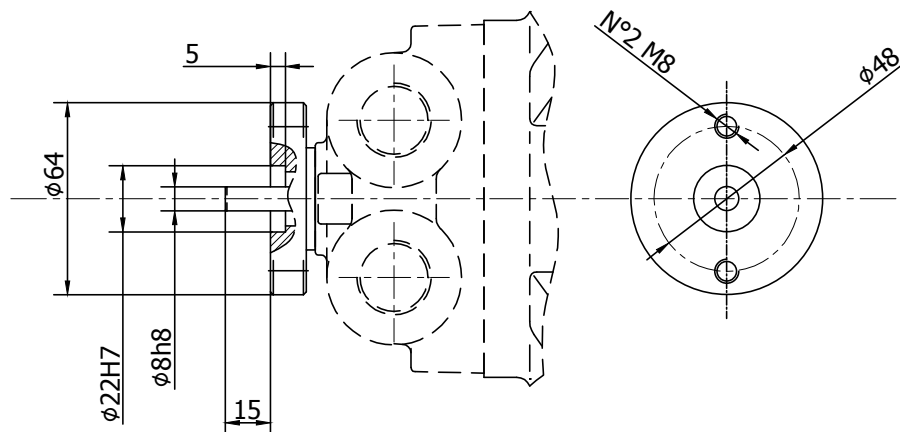

EST

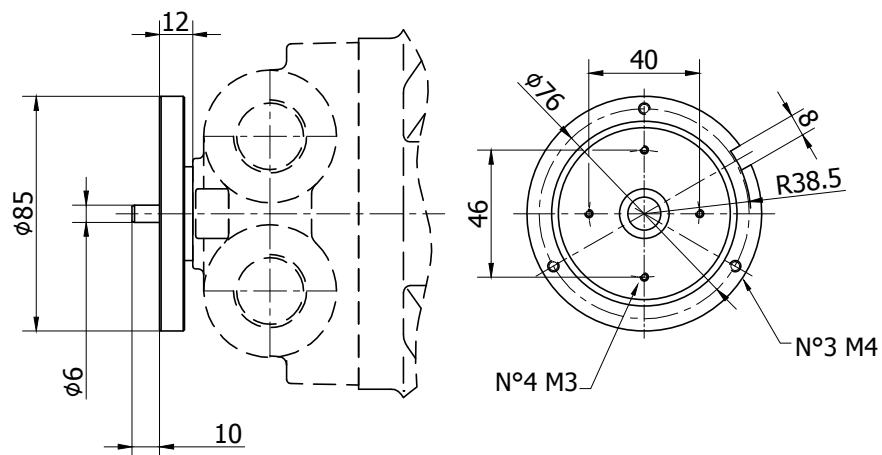


EST30




Operating parameters	E-....../3
Power supply (VDC)	10-30
Switching current (mA)	150
Frequency (Hz) 100rpm	50
Impulse/rpm	30
Operating temp. (°C)	-24/+70
Protection degree	IP67
Output	NPN
Motor type	All types

MODEL	ø5
Torque	1 Nm

Model	Output	Fig.
E-....../AP/....	PNP	D

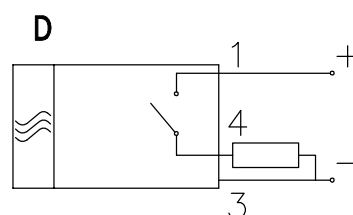


EST31

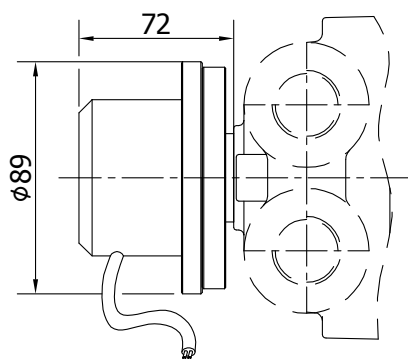

Power supply (VDC)	8-24
Impulse/rpm	500
Operating temp. (°C)	0/+60
Protection degree	IP65
Output	Push-pull
Motor type	All types
MODEL	ø5
Torque	1 Nm

EST32

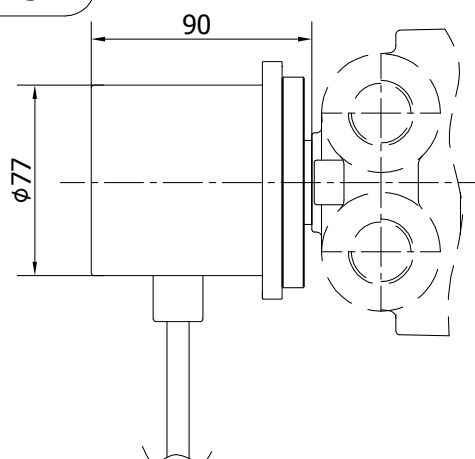


Power supply (VDC)	8-24
Position control	4096 positions/rpm
Memory space	4096 rpm
Operating temp. (°C)	-20/+100
Protection degree	IP67
Output	SSI interface
Motor type	All types

MODEL	φ6
Torque	1 Nm

Encoder type: EAM 36 F 12/12 G8/30 S P Z E 6x6 PR2


EST33

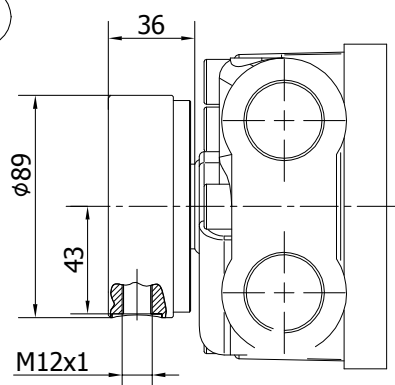


Impulse/rpm	12
Motor type	All types

Sensor NOT included


SPLINED BILLETS




For: HCD1/C190 A0




For: HCD2 A0
HCD2/S2 A0
HCD3/G2 A0




For: HCD3 A0




For: HCD05 A11




For: HCD05 A0
HCD1 A0




For: HCD2/C300 A0



For: HCD3/G4 A0
HCD5/G4 A0
HCD5 A0



For: HCD2 A0
HCD2/S2 A0
HCD3/G2 A0
HCD3 A0

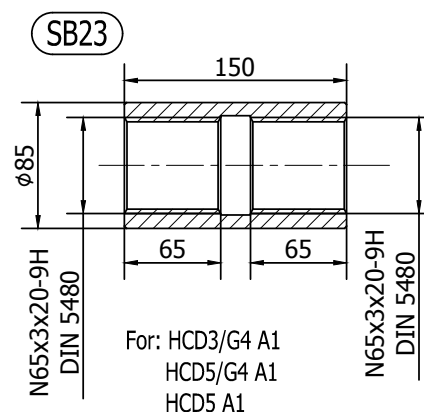


For: HCD3/G4 A1
HCD5/G4 A1
HCD5 A1

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.


ADAPTOR FLANGES

FL1

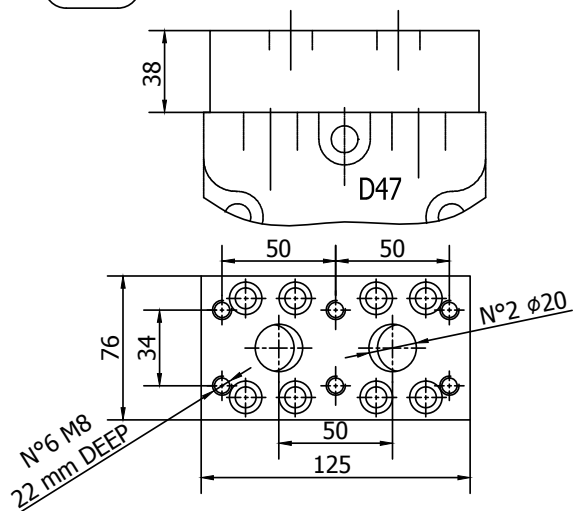


Connection block, fitting D47 distributor, for motor MR 125/160/190/200/250/300/330

FL2

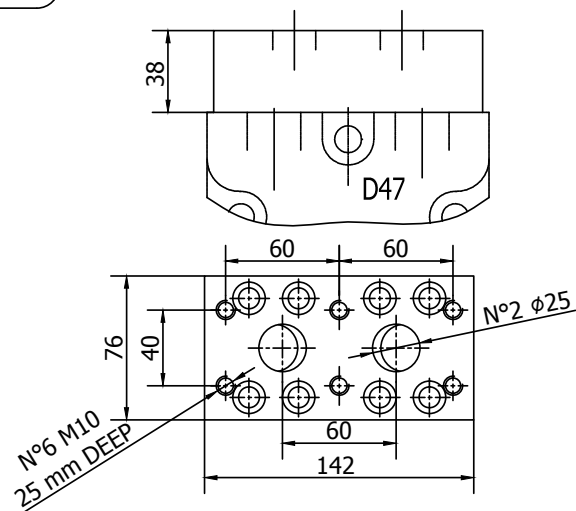

Connection block, fitting D47 distributor, for motor MR 350/450/500/600/700/800

SPLINED BARS

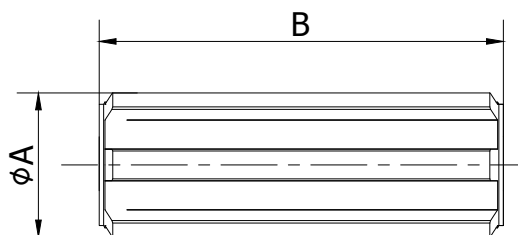

	A	B
B8075	W35x2x16-8e DIN 5480	100
B8076	W40x3x12-8e DIN 5480	100
B8077	28 UNI 221	100
B8078	36 UNI 220	100

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

ITALGROUP MOTORS

HC SERIES - VALVES


TECHNICAL CATALOGUE

INDEX - VALVES

<u>SINGLE OVERCENTER - OVSA 160</u>	Pag.	98
<u>DOUBLE OVERCENTER - OVDA 160</u>	"	99
<u>FLUSHING - AP 40</u>	"	100
<u>DOUBLE RELIEF - RVDA 80</u>	"	101
<u>DOUBLE RELIEF AND FLUSHING - RVDAP 80</u>	"	102
<u>SINGLE RELIEF AND ANTICAVITATION - RVSAC 200</u>	"	103
<u>DOUBLE OVERCENTER - OVDA 300</u>	"	104
<u>DOUBLE RELIEF - RVDA 200</u>	"	105
<u>DOUBLE OVERCENTER - OVDA 480</u>	"	106
<u>DOUBLE RELIEF - RVDA 380</u>	"	107
<u>DOUBLE RELIEF AND FLUSHING - RVDAP 90</u>	"	108
<u>VALVES ORDERING CODE</u>	"	109


SINGLE OVERCENTER VALVE - OVSA 160

INSTALLATION DRAWING

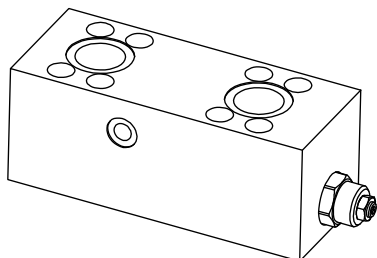

PORTS DIMENSION



V1,V2	1" BSP
F	1/4" BSP
C1,C2	O-ring 4137 Parker code 2-220

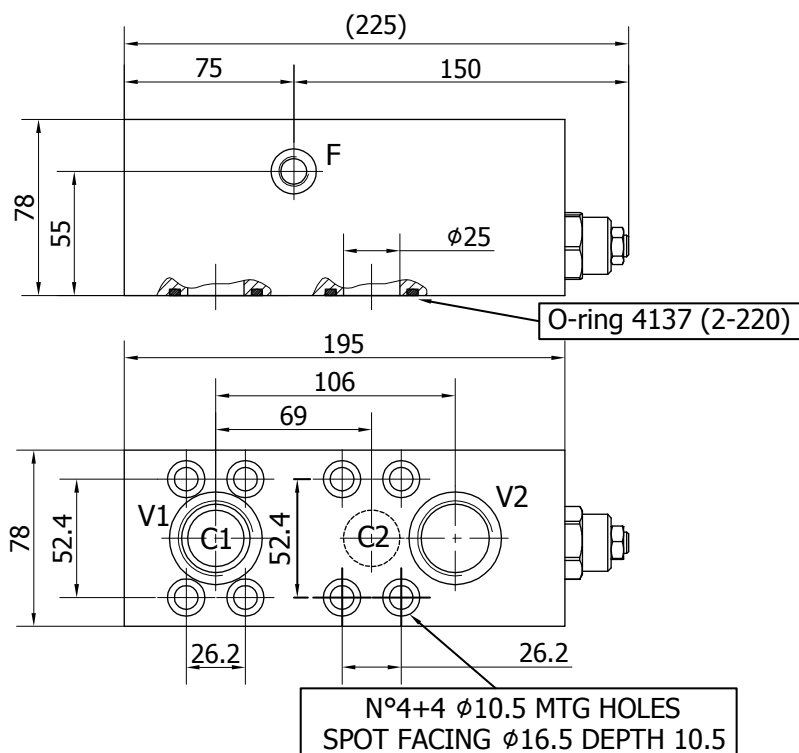

TECHNICAL DATA - OVSA 160

		OVSA.160.1.A.D47	OVSA.160.2.C.D47	OVSA.160.3.C.D47
NOMINAL FLOW	[l/min]	120	120	120
MAXIMUM FLOW	[l/min]	160	160	160
MAXIMUM PRESSURE	[bar]	350	350	350
PILOT RATIO	[-]	3:1	4.5:1	10:1
RELIEF VALVE SETTING RANGE	[bar]	70-280	140-350	140-350
STANDARD RELIEF SETTING	[bar]	210	210	210
BLOCK MATERIAL	[-]	steel	steel	steel
DISTRIBUTOR FITTING	[-]	D47	D47	D47


- (*) Standard version. Usually ready on stock.

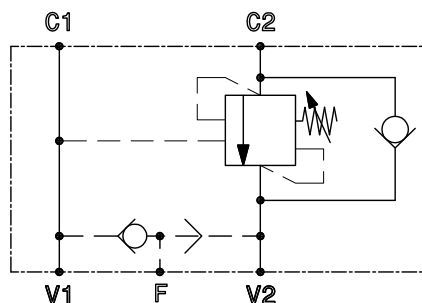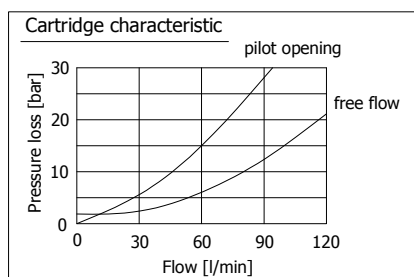

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.


DOUBLE OVERCENTER VALVE - OVDA 160

INSTALLATION DRAWING

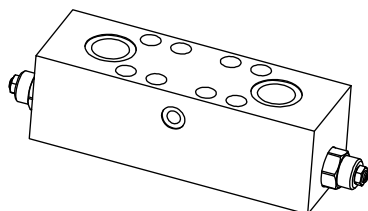



PORTS DIMENSION

V1,V2	1" BSP
F	1/4" BSP
C1,C2	O-ring 4137 Parker code 2-220

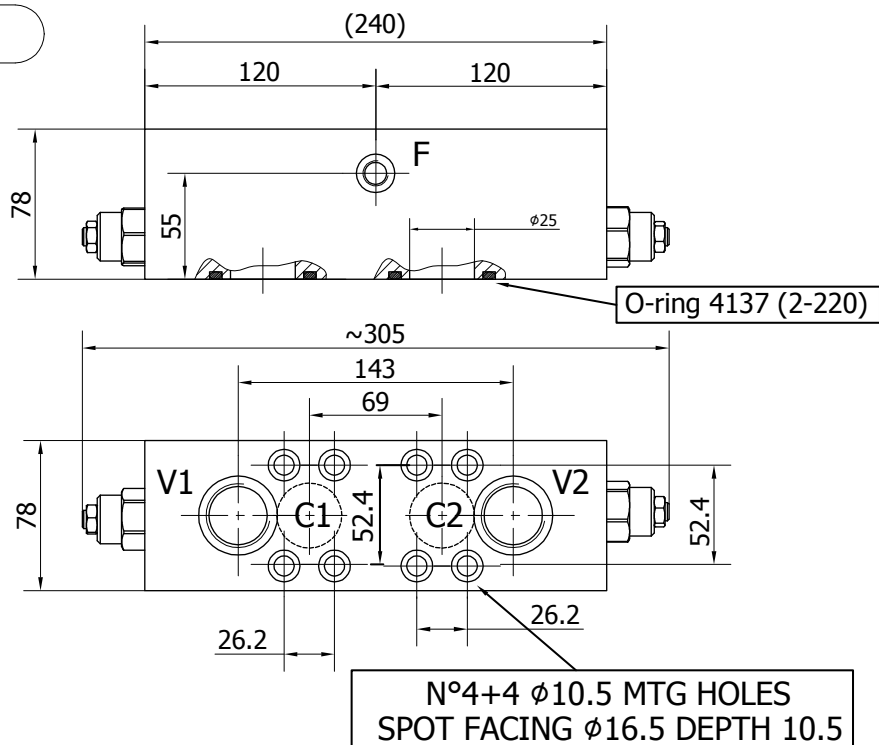

TECHNICAL DATA - OVDA 160


		OVDA.160.1.A.D47	OVDA.160.2.C.D47	OVDA.160.3.C.D47
NOMINAL FLOW	[l/min]	120	120	120
MAXIMUM FLOW	[l/min]	160	160	160
MAXIMUM PRESSURE	[bar]	350	350	350
PILOT RATIO	[-]	3:1	4.5:1	10:1
RELIEF VALVE SETTING RANGE	[bar]	70-280	140-350	140-350
STANDARD RELIEF SETTING	[bar]	210	210	210
BLOCK MATERIAL	[-]	steel	steel	steel
DISTRIBUTOR FITTING	[-]	D47	D47	D47

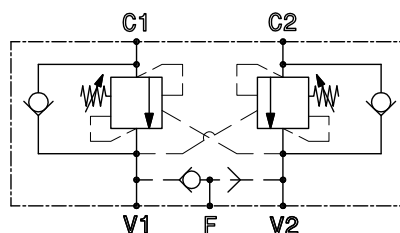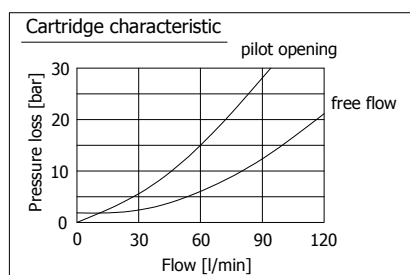

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.


FLUSHING VALVE - AP40

INSTALLATION DRAWING



PORTS DIMENSION



V1,V2	1" BSP
F	1/4" BSP
C1,C2	O-ring 4137 Parker code 2-220

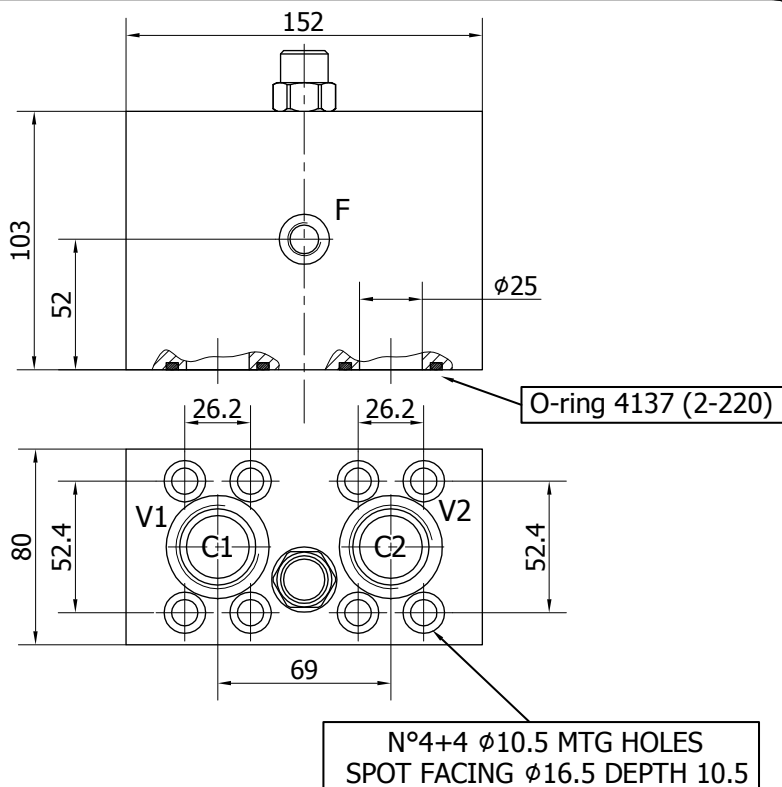

TECHNICAL DATA - AP40

AP40.D47


MAXIMUM FLUSHING FLOW	[l/min]	80
MAXIMUM PRESSURE	[bar]	350
BLOCK MATERIAL	[]	steel
DISTRIBUTOR FITTING	[]	D47

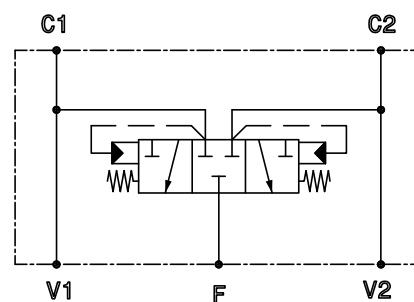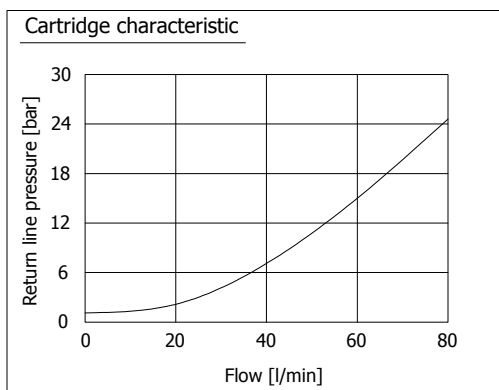

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.


DOUBLE RELIEF VALVE- RVDA 80

INSTALLATION DRAWING

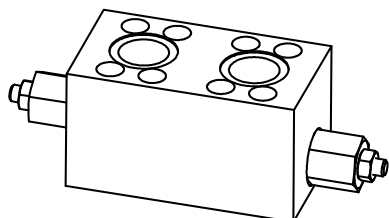

PORTS DIMENSION



V1,V2	1" BSP
C1,C2	O-ring 4137 Parker code 2-220

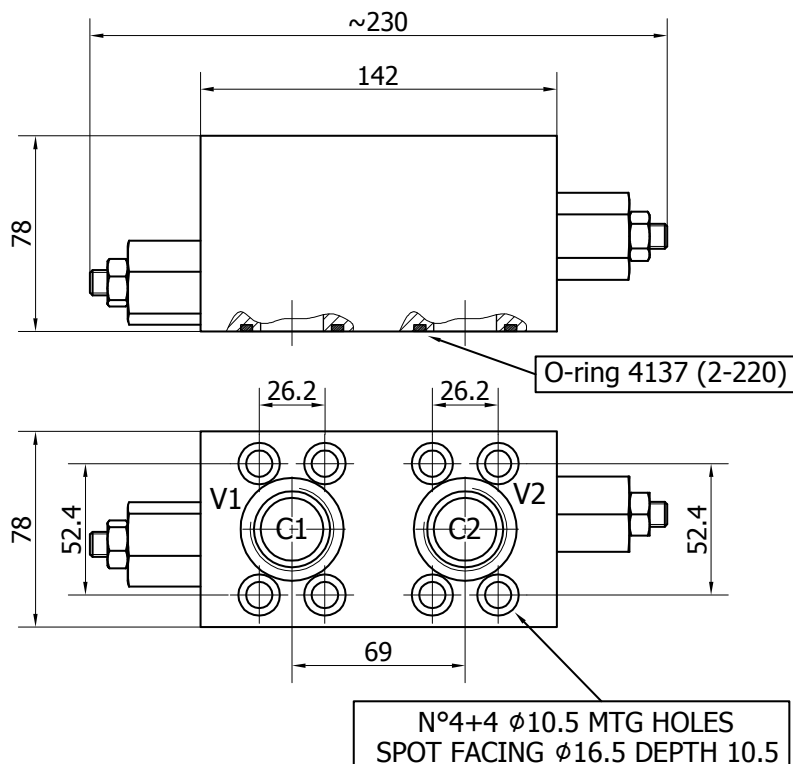

TECHNICAL DATA - RVDA 80

RVDA.80.C.D47


NOMINAL FLOW	[l/min]	150
MAXIMUM FLOW	[l/min]	200
MAXIMUM PRESSURE	[bar]	350
RELIEF VALVE SETTING RANGE	[bar]	20-350
STANDARD RELIEF SETTING	[bar]	20
BLOCK MATERIAL	[]	steel
DISTRIBUTOR FITTING	[]	D47

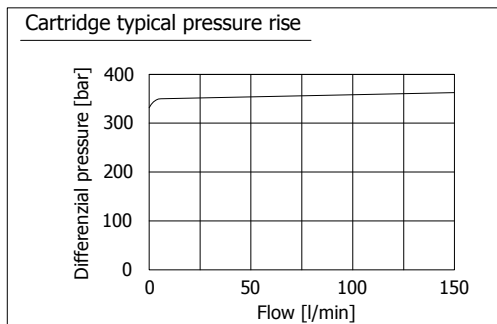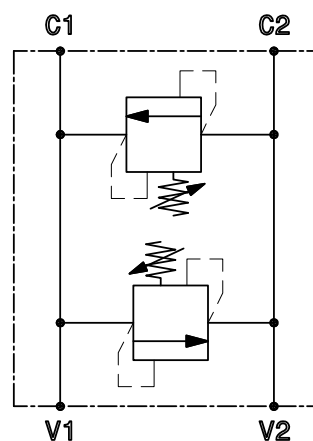

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.


DOUBLE RELIEF WITH FLUSHING - RVDAP80

INSTALLATION DRAWING



PORTS DIMENSION


V1,V2	1" BSP
F	1/4" BSP
C1,C2	O-ring 4137 Parker code 2-220

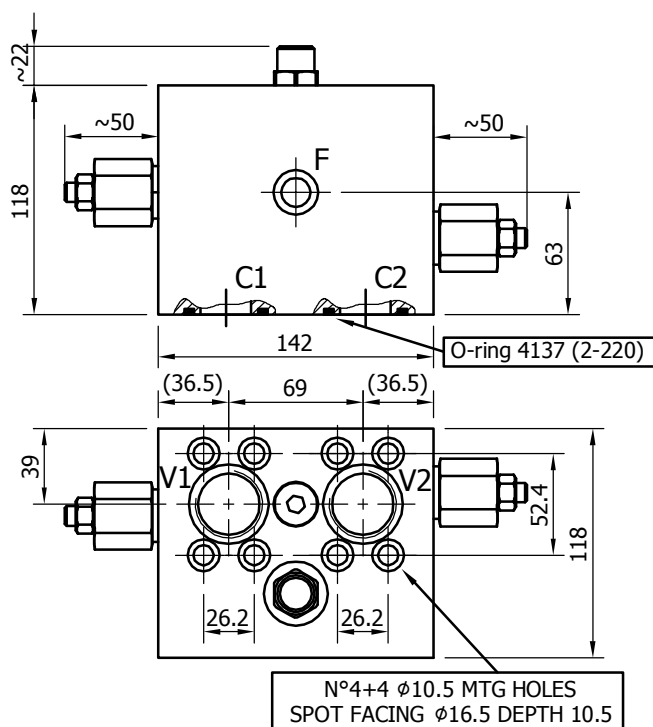



TECHNICAL DATA - RVDAP 80

RVDAP 80		
RELIEF VALVE MAXIMUM FLOW	[l/min]	200
RELIEF VALVE SETTING RANGE	[bar]	20-350
STANDARD RELIEF SETTING	[bar]	70
MAXIMUM FLUSHING FLOW	[l/min]	80
MAXIMUM PRESSURE	[bar]	350
BLOCK MATERIAL	[]	steel
DISTRIBUTOR FITTING	[]	D47

Relief cartridge typical pressure rise

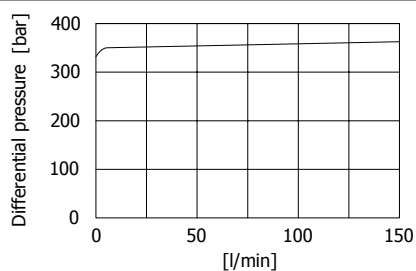


Flushing valve characteristic

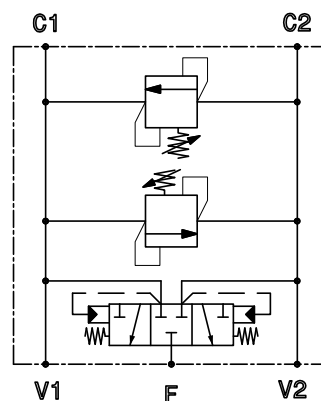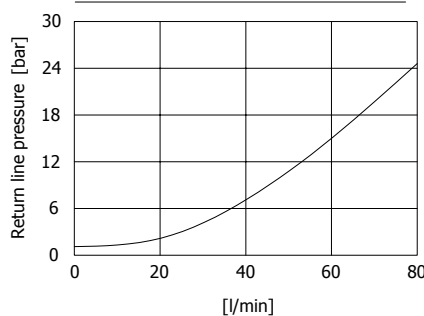


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.

INSTALLATION DRAWING



PORTS DIMENSION


V1,V2	1" BSP
M1,M2	1/4" BSP
C1,C2	O-ring 4137 Parker code 2-220

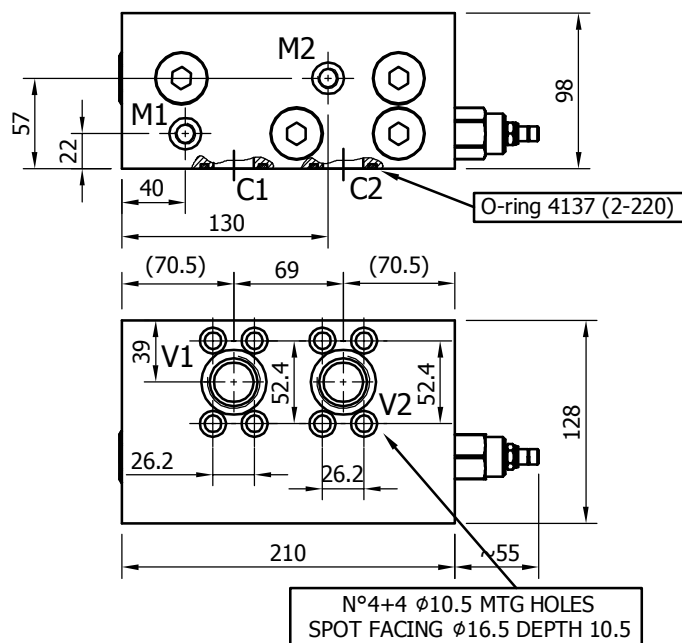



TECHNICAL DATA - RVSAC 200

RVSAC200		
RELIEF VALVE MAXIMUM FLOW	[l/min]	200
MAXIMUM PRESSURE	[bar]	350
RELIEF VALVE SETTING RANGE	[bar]	70-420
STANDARD RELIEF SETTING	[bar]	70
CHECK VALVE MAXIMUM FLOW	[l/min]	160
BLOCK MATERIAL	[]	steel
DISTRIBUTOR FITTING	[]	D47

Cartridge typical pressure rise

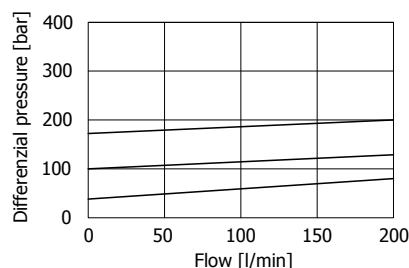


Oil supply flow (from C2 to C1)

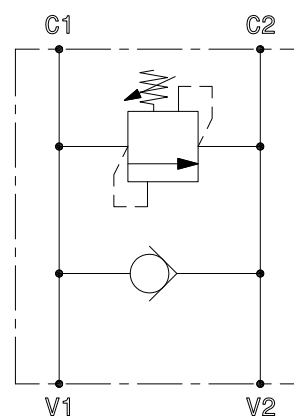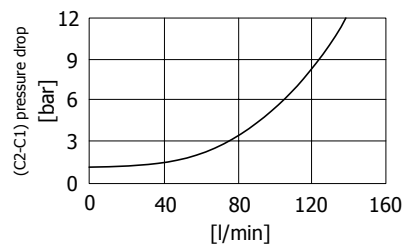

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

DOUBLE OVERCENTER VALVE - OVDA 300


INSTALLATION DRAWING

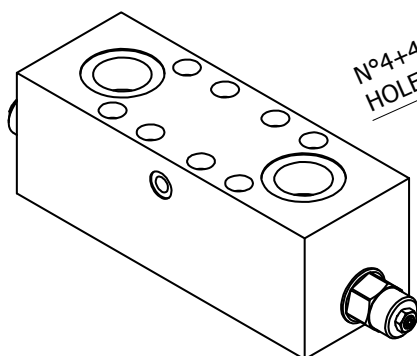

N°4+4 MTG
HOLES Ø12,5



PORTS DIMENSION

V1,V2	1"1/4 BSPP
F	1/4" BSPP
C1,C2	O-ring 4187 Parker code 2-225

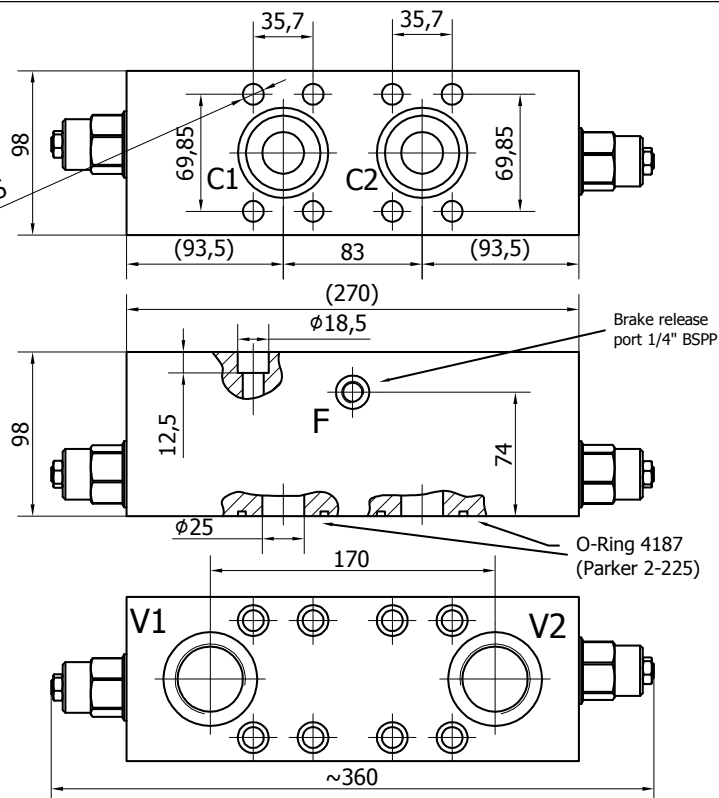

TECHNICAL DATA - OVDA 300


		OVDA.300.1.A.D75	OVDA.300.4.C.D75	OVDA.300.2.C.D75
NOMINAL FLOW	[l/min]	240	240	240
MAXIMUM FLOW	[l/min]	300	300	300
MAXIMUM PRESSURE	[bar]	350	350	350
PILOT RATIO	[-]	3:1	10:1	4.5:1
RELIEF VALVE SETTING RANGE	[bar]	70-280	140-350	140-350
STANDARD RELIEF SETTING	[bar]	210	210	210
BLOCK MATERIAL	[-]	steel	steel	steel
DISTRIBUTOR FITTING	[-]	D75	D75	D75

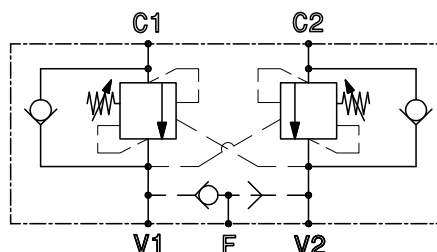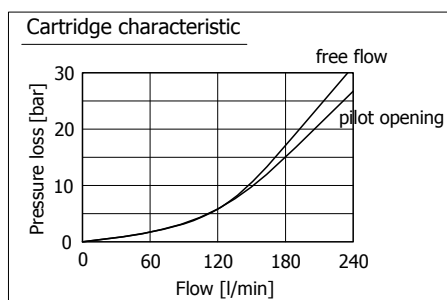

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.


DOUBLE RELIEF VALVE- RVDA 200

INSTALLATION DRAWING



PORTS DIMENSION



V1,V2	1"1/4 BSP
C1,C2	O-ring 4187 Parker code 2-225

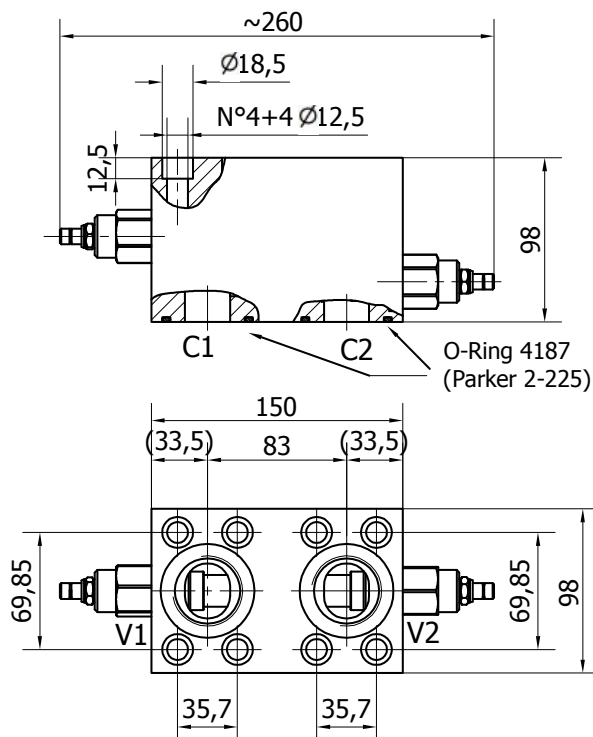

TECHNICAL DATA - RVDA 200

RVDA.200.C.D75


RELIEF VALVE MAXIMUM FLOW	[l/min]	200
MAXIMUM PRESSURE	[bar]	350
RELIEF VALVE SETTING RANGE	[bar]	70-420
STANDARD RELIEF SETTING	[bar]	70
BLOCK MATERIAL	[]	steel
DISTRIBUTOR FITTING	[]	D75

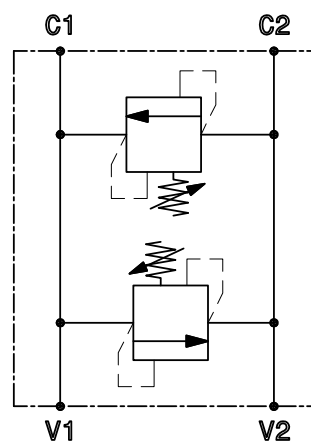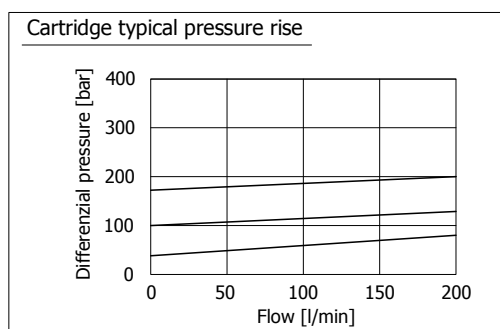

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.


DOUBLE OVERCENTER VALVE - OVDA 480

INSTALLATION DRAWING

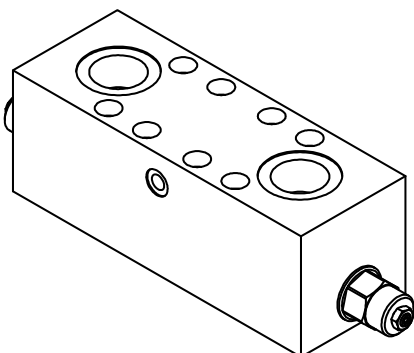



PORTS DIMENSION

V1,V2	1"1/2 BSPP
F	1/4" BSPP
C1,C2	O-ring 4187 Parker code 2-225

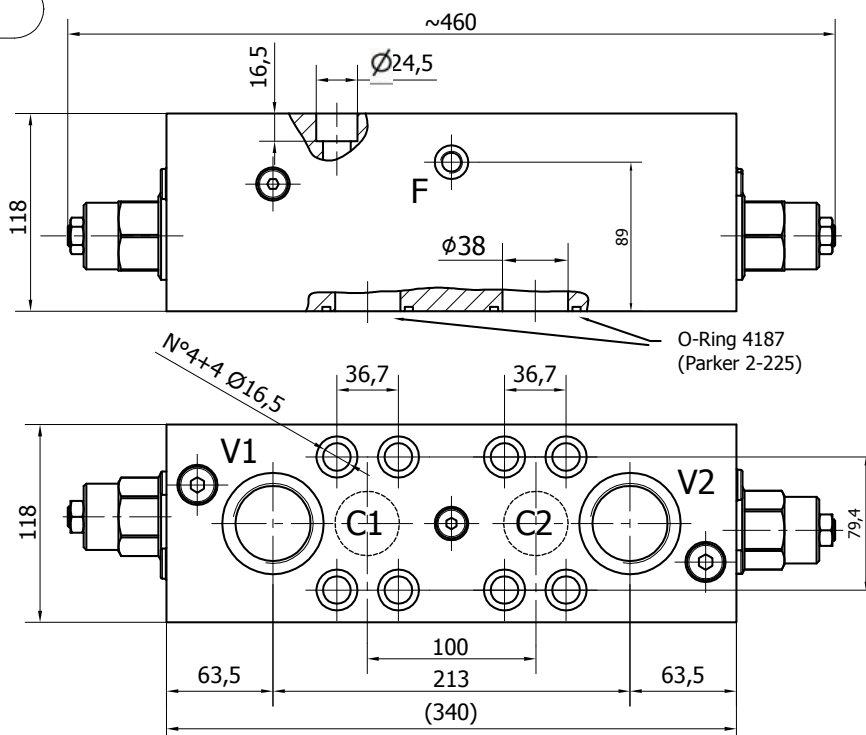

TECHNICAL DATA - OVDA 480


		OVDA.480.1.A.D90	OVDA.480.4.C.D90	OVDA.480.2.C.D90
NOMINAL FLOW	[l/min]	480	480	480
MAXIMUM FLOW	[l/min]	600	600	600
MAXIMUM PRESSURE	[bar]	350	350	350
PILOT RATIO	[-]	3:1	10:1	4.5:1
RELIEF VALVE SETTING RANGE	[bar]	70-280	140-350	140-350
STANDARD RELIEF SETTING	[bar]	210	210	210
BLOCK MATERIAL	[-]	steel	steel	steel
DISTRIBUTOR FITTING	[-]	D90	D90	D90

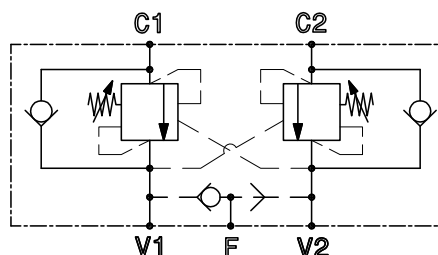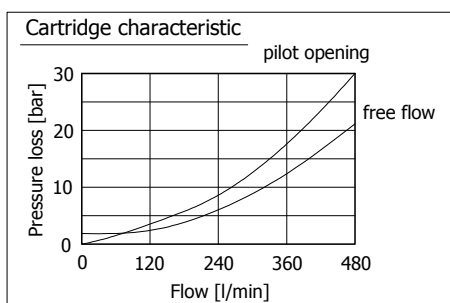

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.


DOUBLE RELIEF VALVE- RVDA 380

INSTALLATION DRAWING



PORTS DIMENSION

V1,V2	1"1/2 BSP
C1,C2	O-ring 4187 Parker code 2-225


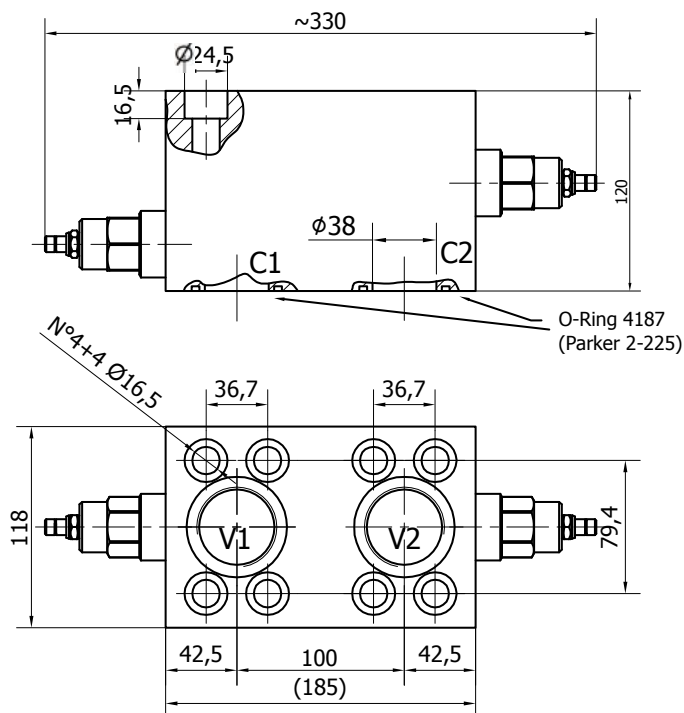


TECHNICAL DATA - RVDA 380

RVDA.380.C.D90


RELIEF VALVE MAXIMUM FLOW	[l/min]	380
MAXIMUM PRESSURE	[bar]	350
RELIEF VALVE SETTING RANGE	[bar]	70-420
STANDARD RELIEF SETTING	[bar]	70
BLOCK MATERIAL	[]	steel
DISTRIBUTOR FITTING	[]	D90

Cartridge typical pressure rise

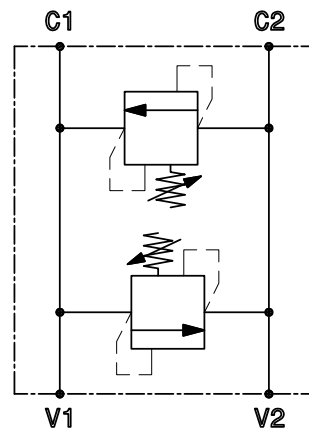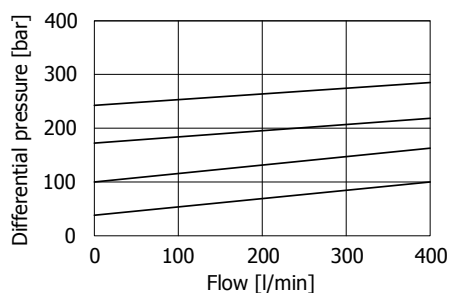


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

INSTALLATION DRAWING



PORTS DIMENSION




V1,V2	1"1/2 BSP
F	1/4" BSP
C1,C2	O-ring 4187 Parker code 2-225

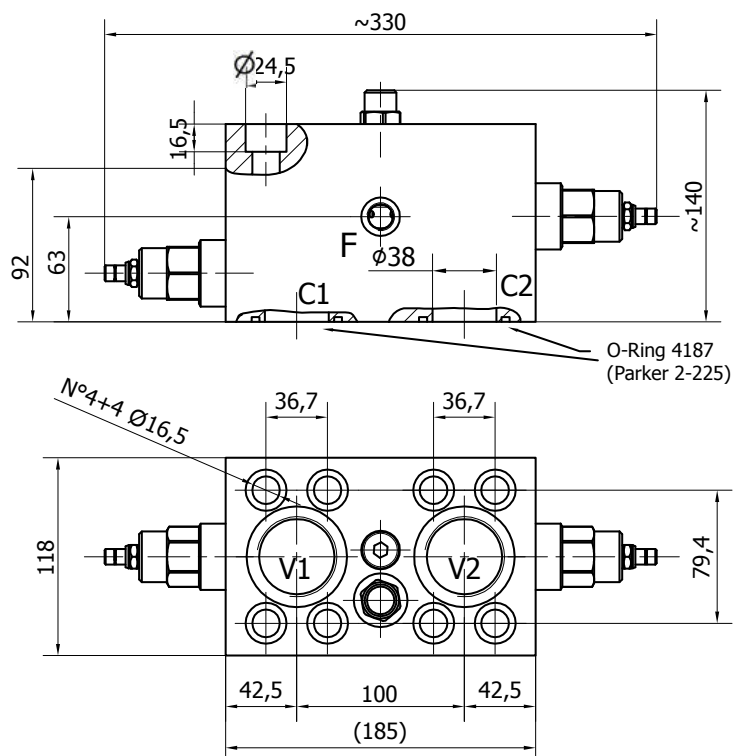

TECHNICAL DATA - RVDAP 90


RVDAP 90

RELIEF VALVE MAXIMUM FLOW	[l/min]	380
RELIEF VALVE SETTING RANGE	[bar]	70-420
STANDARD RELIEF SETTING	[bar]	70
MAXIMUM FLUSHING FLOW	[l/min]	80
MAXIMUM PRESSURE	[bar]	350
BLOCK MATERIAL	[]	steel
DISTRIBUTOR FITTING	[]	D90

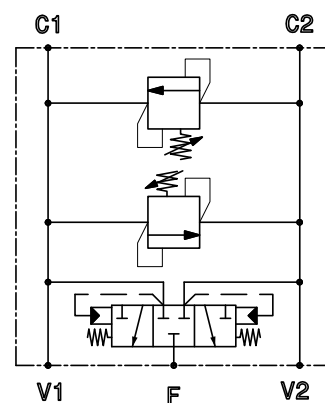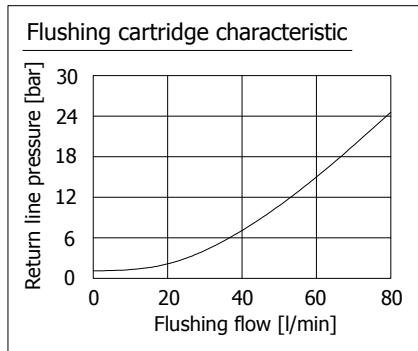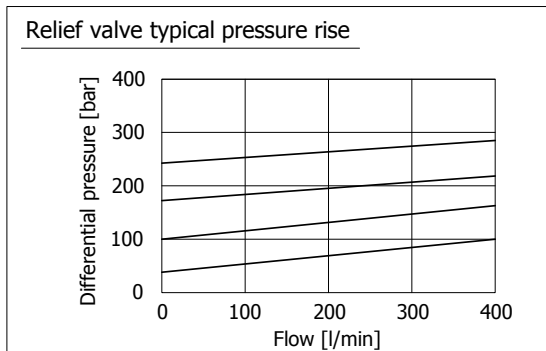

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

VALVES ORDERING CODE

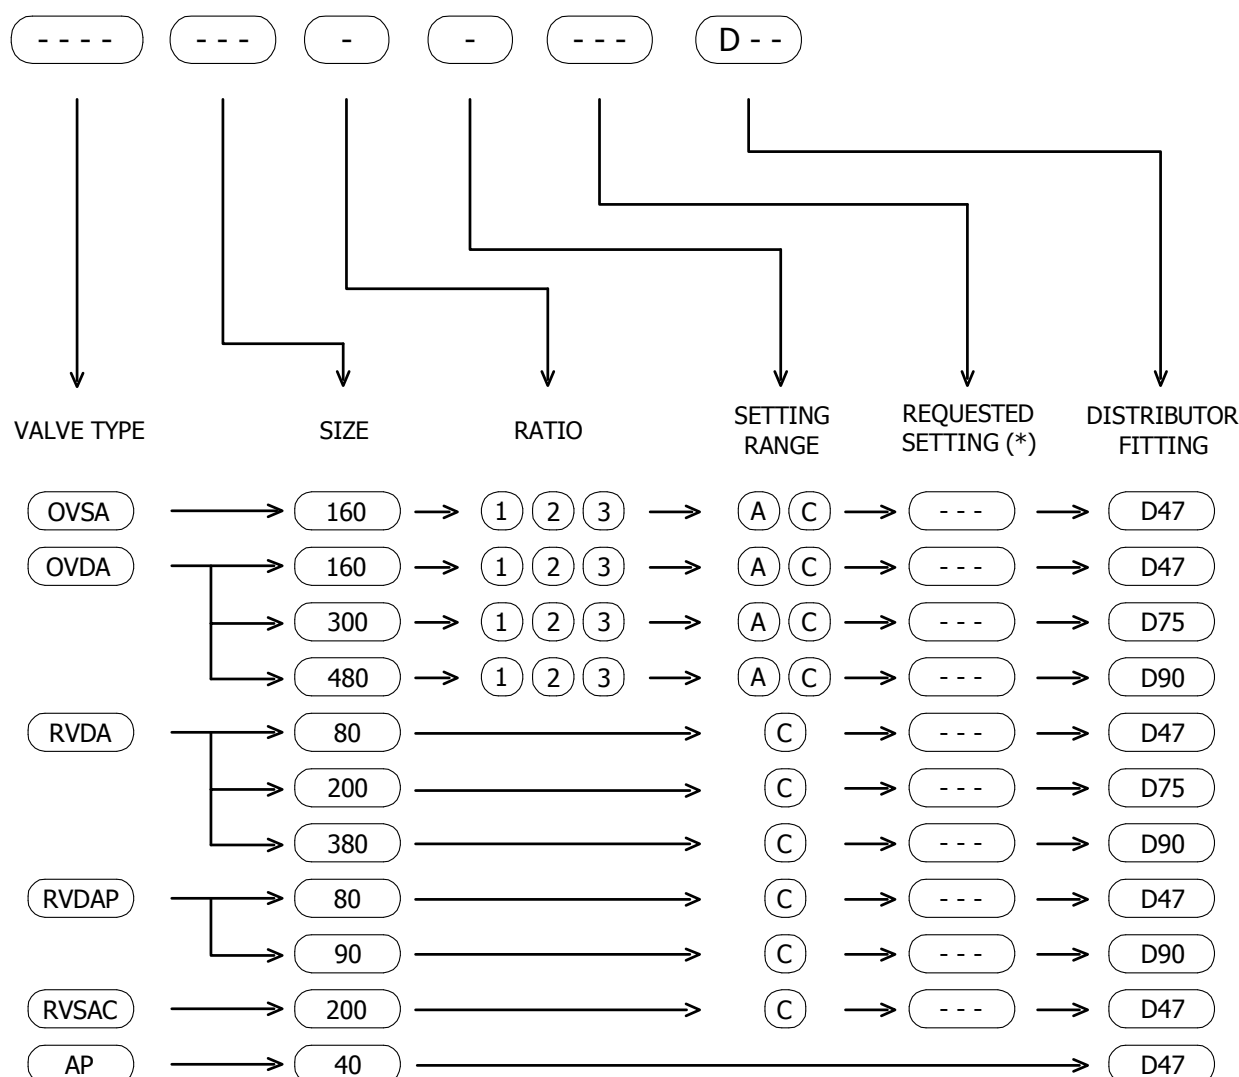

(*) If not specified, the valve will be supplied with the standard setting. Refer to the valves datasheets for the standard setting value.

EXAMPLES:

OVDA 160 1 A 200 D47

AP40 D47

RVDA 380 C D90

CONTACT US

Italgroup S.r.l.
Via Pacinotti 20/22
41010 - Gaggio di Piano (Modena) – Italy

Tel. +39 059 92 42 57
Fax +39 059 92 01 13
e-mail: italgroup@italgroup.eu
internet: <http://www.italgroup.eu>

REACH US



Europe

Austria
Belgium
Croatia
Czech Republic
Cyprus
Denmark
Faroe Islands
France
Finland
Germany
Greece
Iceland
Italy
Netherlands
Norway
Poland
Portugal
Russia
Slovenia
Spain
Sweden
Switzerland
Turkey
Ukraine
United Kingdom

Africa

Egypt
South Africa
Tunisia

America

Argentina
Brazil
Canada
Chile
Mexico
Peru
USA
Colombia

Asia

China
Hong Kong
India
Indonesia
Iran
Israel
Philippines
Russia
Belarus
Singapore
South Korea
Thailand
Taiwan
United Arab Emirates
Vietnam

Oceania

Australia
New Zealand

