


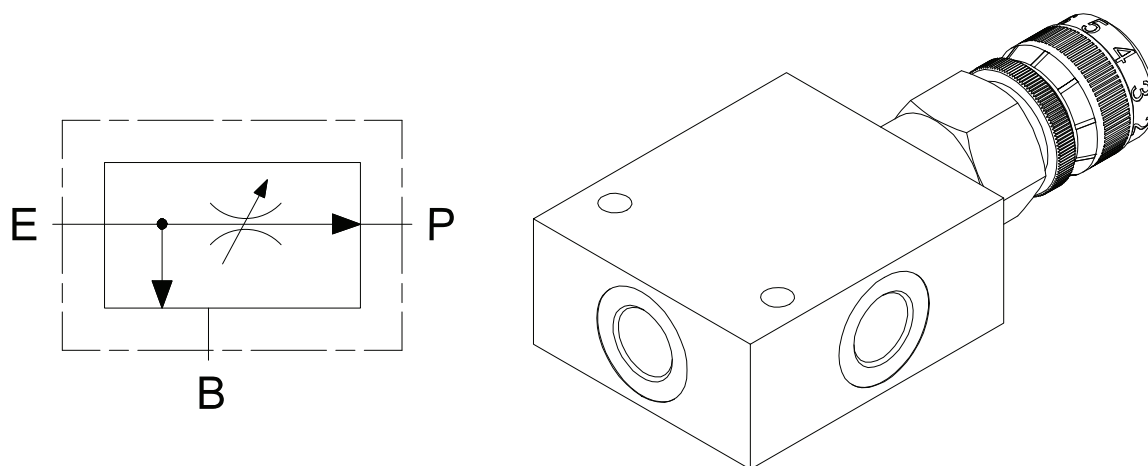

CARATTERISTICHE

Portata min/max in ingresso

Portata min/max regolata

Pressione di lavoro Max.

Temperatura ambiente

Temperatura olio

Filtraggio consigliato

Collettori in alluminio

0.5/60 L/min - 0.1/16 GPM

0.5/30 L/min - 0.1/8 GPM

315 bar 4568 PSI

-30 + 50°C

-30 + 80°C

25 micron

PERFORMANCE

Min/max inlet flow-rate

Min/max regulated flow-rate

Max working pressure

Room temperature

Oil temperature

Recommended filtration

Aluminium body

